
SCIENTIFIC AMERICAN

[Entered at the Post Office of New York, N. Y., as Second Class Matter. Copyrighted, 1887, by Munn & Co.]

A WEEKLY JOURNAL OF PRACTICAL INFORMATION, ART, SCIENCE, MECHANICS, CHEMISTRY, AND MANUFACTURES.

Vol. LVII.—No. 13. [NEW SERIES.] NEW YORK, SEPTEMBER 24, 1887. [$3.00 per Year.

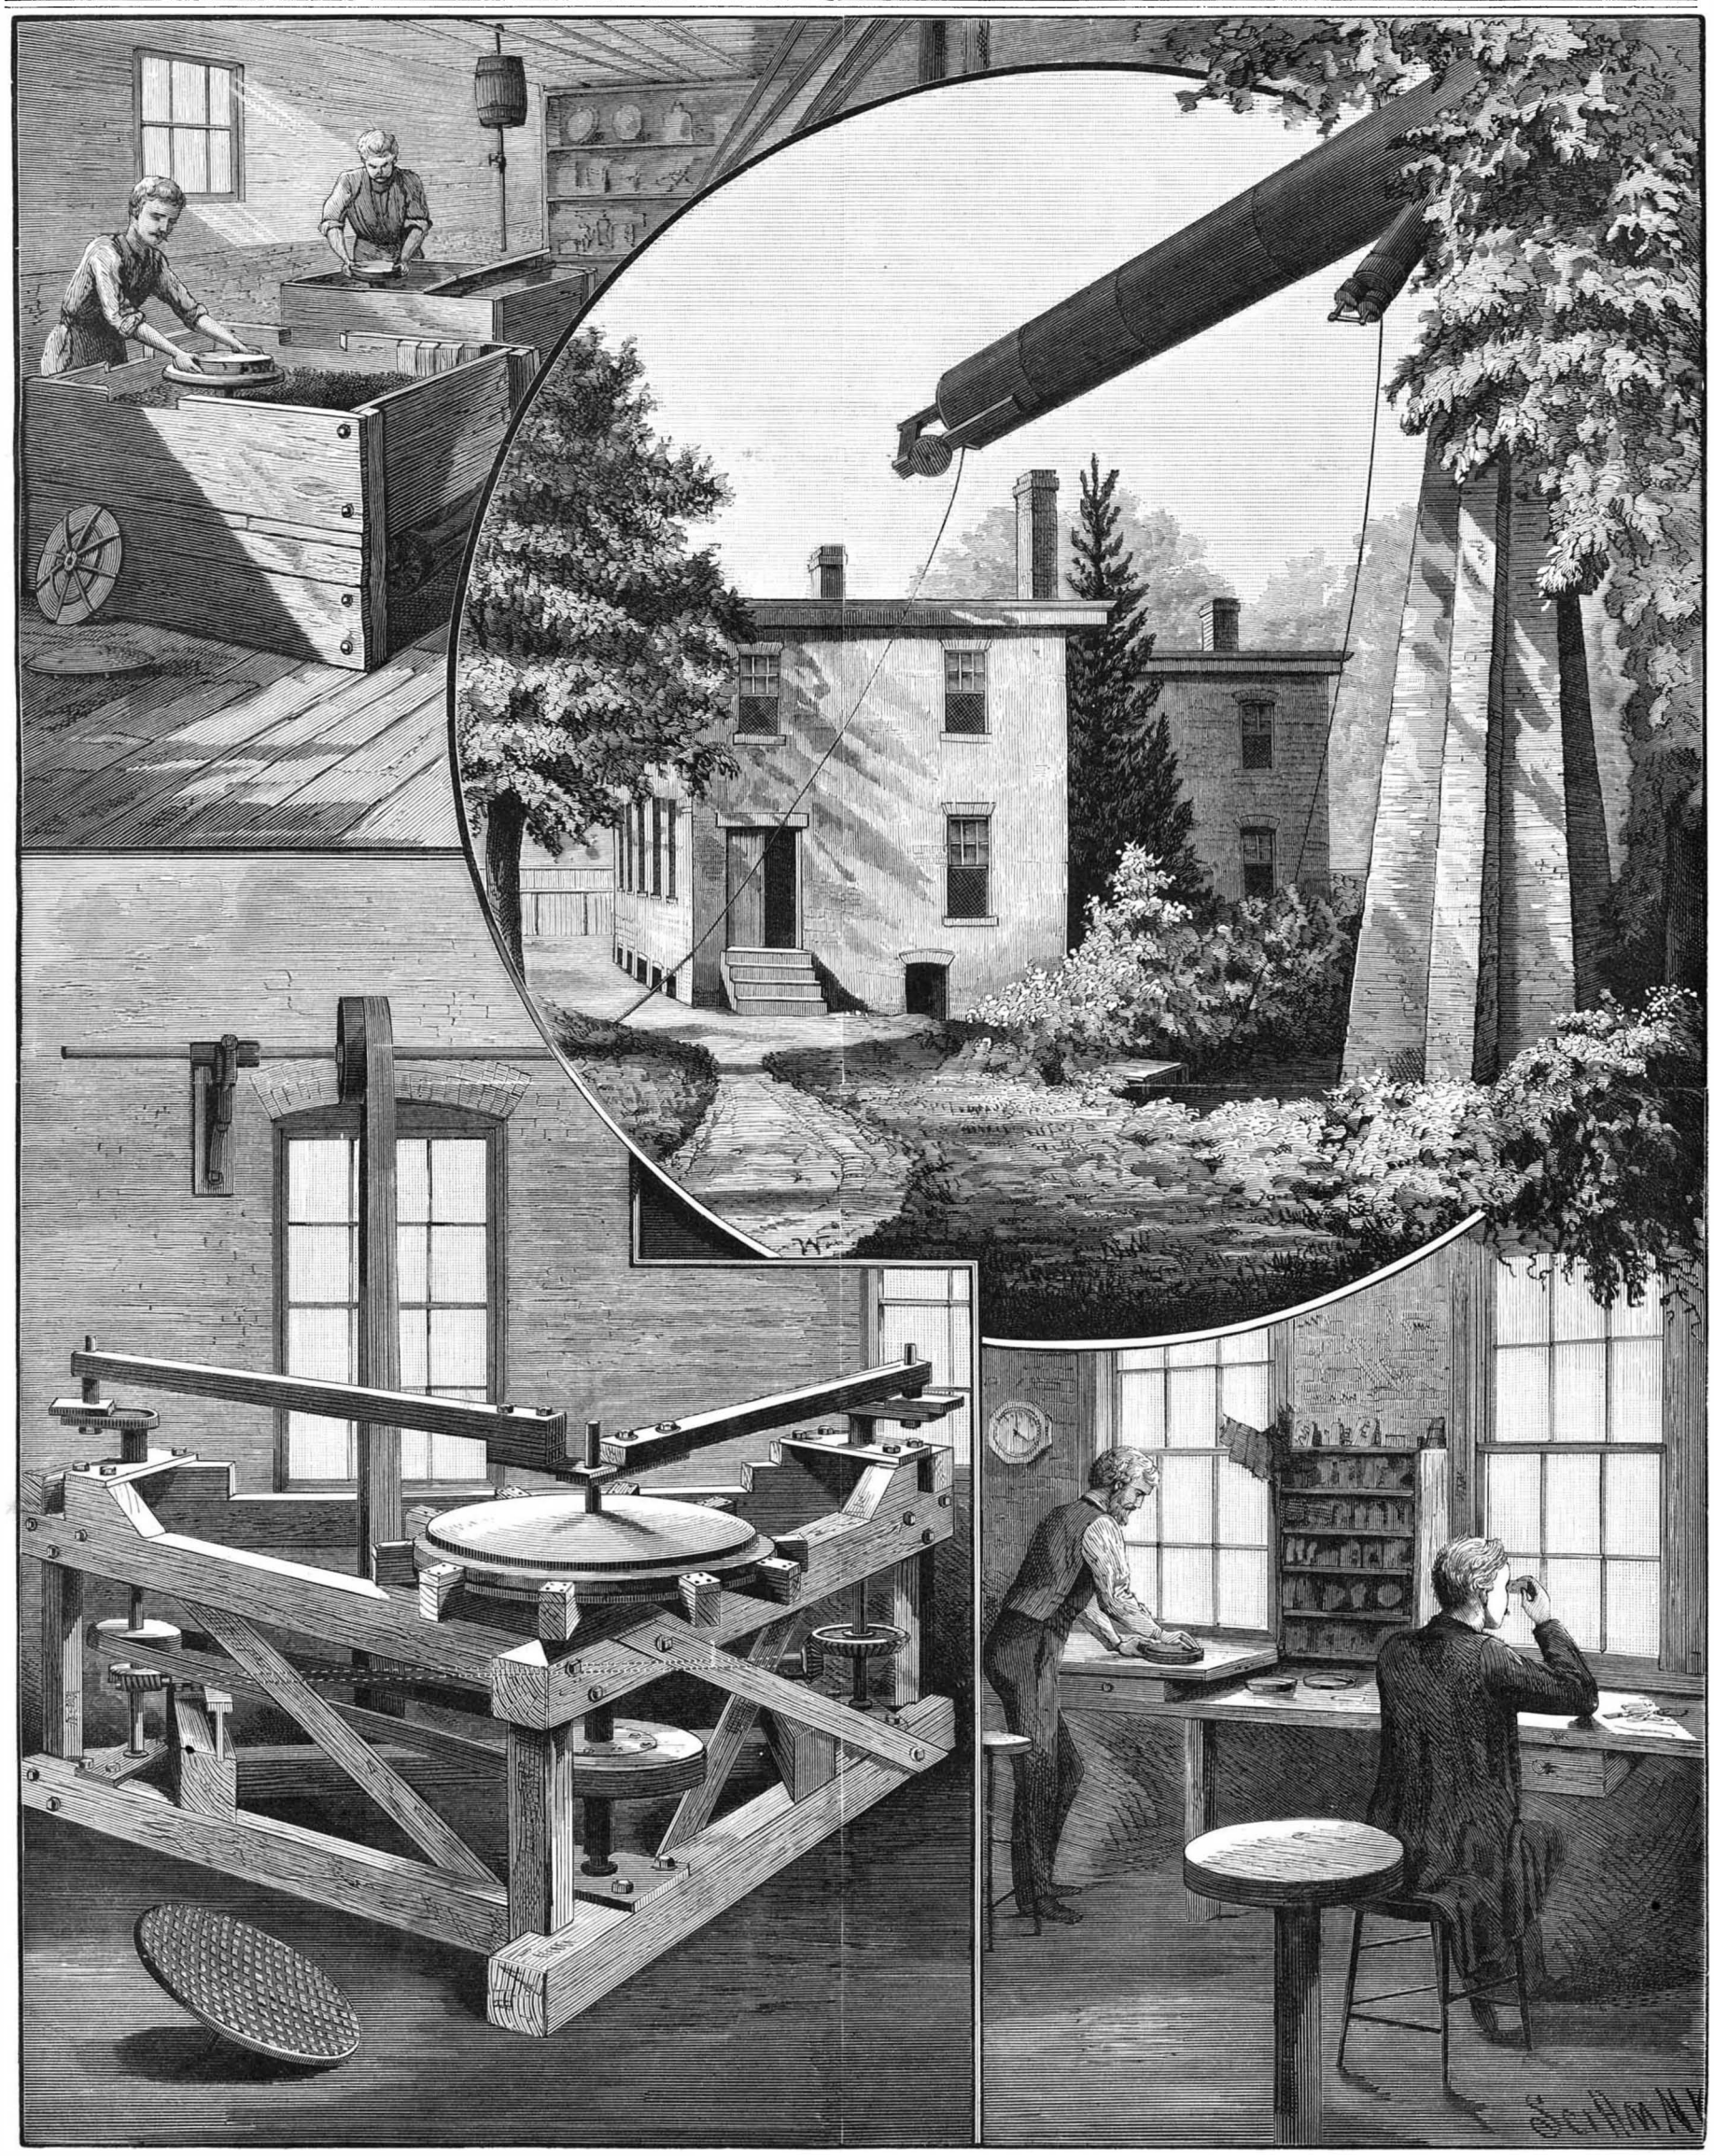

Grinding Objectives. Machine used in polishing the Lick Objective. Alvan Clark's Sons' Establishment. Polishing Objectives.

HOW TELESCOPES ARE MADE.

© 1887 SCIENTIFIC AMERICAN, INC.

Scientific American.

ESTABLISHED 1845.

MUNN & CO., Editors and Proprietors.

PUBLISHED WEEKLY AT

No. 361 BROADWAY, NEW YORK.

O. D. MUNN. A. E. BEACH.

TERMS FOR THE SCIENTIFIC AMERICAN.

One copy, one year, for the U. S. or Canada.....$3 00
One copy, six months, for the U. S. or Canada..... 1 50
One copy, one year, to any foreign country belonging to Postal Union, 4 00
Remit by postal or express money order.

Australia and New Zealand.—Those who desire to receive the SCIENTIFIC AMERICAN, for a little over one year, may remit £1 in current Colonial bank notes. Address

MUNN & CO., 361 Broadway, corner of Franklin Street, New York.

The Scientific American Supplement

is a distinct paper from the SCIENTIFIC AMERICAN. THE SUPPLEMENT is issued weekly. Every number contains 16 octavo pages, uniform in size with SCIENTIFIC AMERICAN. Terms of subscription for SUPPLEMENT, $5.00 a year, for U. S. and Canada. $6.00 a year to foreign countries belonging to the Postal Union. Single copies, 10 cents. Sold by all newsdealers throughout the country.

Combined Rates.—The SCIENTIFIC AMERICAN and SUPPLEMENT will be sent for one year, to any address in U. S. or Canada, on receipt of *seven dollars*.

The safest way to remit is by draft, postal order, express money order, or registered letter.

Australia and New Zealand.—The SCIENTIFIC AMERICAN and SUPPLEMENT will be sent for a little over one year on receipt of £2 current Colonial bank notes.

Address MUNN & CO., 361 Broadway, corner of Franklin Street, New York.

Scientific American Export Edition.

The SCIENTIFIC AMERICAN Export Edition is a large and splendid periodical, issued once a month. Each number contains about one hundred large quarto pages, profusely illustrated, embracing: (1) Most of the plates and pages of the four preceding weekly issues of the SCIENTIFIC AMERICAN, with its splendid engravings and valuable information. (2) Commercial, trade, and manufacturing announcements of leading houses. Terms for Export Edition, $5.00 a year, sent prepaid to any part of the world. Single copies, 50 cents. ☞ Manufacturers and others who desire to secure foreign trade may have large and handsomely displayed announcements published in this edition at a very moderate cost.

Address MUNN & CO., 361 Broadway, corner of Franklin Street, New York.

NEW YORK, SATURDAY, SEPTEMBER 24, 1887.

Contents.

(Illustrated articles are marked with an asterisk.)

Adulterations, bakery, poisonous 200
Air, analysis of 199
Alumina bleaching compounds... 192
Alvan Clark establishment,*.,191, 198
Arc lights, odor of 200
Arrowroot, preparation of, in Bermuda 192
Belt, grain elevator* 195
Belts, rubber, large* 195
Boiler for steam heating, low pressure* 194
Boracic acid for hides 201
British Museum, the 193
Centrifugal extractors, speed of. 197
Clark, Alvan, the late* 199
Coin package, ready-reckoning*. 194
Comet of 1815, Olbers', return of. 192
Congress, International Medical, ninth 192
Copper and nickel, coloring 201
Croton water, New York 197
Dental plates, aluminum 193
Engines, triple expansion* 201
Exhibition, International, Glasgow 194
Fan, palm, Chinese, uses of 200
Fire, a, how to act at 198
Flower farming and perfume manufacture in Southern France 196
Gas, natural, possible consequences of using 194
Graphite carbon 195
Holder for ribbons, edgings, etc., convenient 194
Inventions, agricultural 202
Inventions, engineering 202
Inventions, index of 203
Inventions, miscellaneous 202
Jewels, counterfeit 200
Kerosene oil, test of, simple 195
Lightning rods, Tyndall on 195
Liquids, densities of 197
Magnesium light for photographic purposes 199
Minerals at the American Exhibition, London 198
Newspaper advertisements 199
Notes and queries 202, 203
Pneumonia 196
Pulverizing attachment for seeders, improved* 194
Rubber belts, splendid work done by* 195
Seat, school, adjustable, improved 194
Snakes, self mending 197
Star gazers, for 193
Stove bronzes and tiles 196
Tools, fine, annealing and tempering 197
Volunteer to defend America's cup 192
Well, boiling, new 201

TABLE OF CONTENTS OF

SCIENTIFIC AMERICAN SUPPLEMENT

No. 612,

For the Week Ending September 24, 1887.

Price 10 cents. For sale by all newsdealers.

PAGE

I. BIOGRAPHY.—Spencer Fullerton Baird.—Sketch of the life and labors of the eminent naturalist lately deceased 9780

II. BIOLOGY.—Some Important Discoveries in the Life History of the Hop Plant Louse.—By C. V. RILEY, M.A., Ph.D.—An abstract of an important paper read before the Society for the Promotion of Agricultural Science 9781
The Parietal Eye in Fishes.—A further contribution to this curious and recently developed subject.—1 illustration 9780

III. ENGINEERING.—Hydraulic Governor Brake.—An apparatus for perfectly controlling machinery which is exposed to danger of overspeeding.—3 illustrations 9769
Steel Railway Sleepers.—The Hoerde Steel Sleeper: Its Peculiarities and Merits.—5 illustrations 9768
The Elevated Railways of New York.—Elaborate review of the operations of the Manhattan Elevated Railroad, number of its employes, and other data and statistics 9768

IV. INSTRUMENTS OF PRECISION.—Temperature Indicator for Machines.—An apparatus for ringing an alarm upon undue heating of shaft bearings and similar parts of machinery.—1 illustration 9771
The Gas Balance.—An apparatus for the automatic determination of the specific gravity and composition of gas.—By FREDERICK LUX.—An interesting contribution to gas apparatus.—3 illustrations 9770
The Self-Registering Tide Gauge of R. FUESS.—A new apparatus for automatic registration of the fluctuations of tide water.—1 illustration 9771

V. MEDICINE AND PATHOLOGY.—Dr. Corning's System of Administering Cocaine in Painful Nervous Affections.—A new system of producing prolonged local anæsthesia by the external and hypodermic administration of cocaine.—9 illustrations 9778
Loeb's Respirator.—An appliance of preventive surgery for obviating danger from inhalation of smoke.—10 illustrations 9767

VI. METALLURGY.—Progress of Metallurgy in 1886.—Summary of the most interesting and important developments of the year; uses and cheapened production of magnesium; the basic steel process, etc 9776

VII. MISCELLANEOUS.—Chinese Plank Sawing.—A most graphic and interesting account of Chinese handiwork.—2 illustrations 9771
How to Make an Incubator.—A paper on the subject of artificial hatching, giving full description of the construction of an incubator.—7 illustrations 9781
The Jubilee of the Telegraph.—The commemoration of the 50th anniversary of the successful establishment of Cooke and Wheatstone's first telegraph line.—The speeches at the London banquet. 9776
Musical Bells.—1 illustration 9777
Potting the Strawberry.—1 illustration 9777
Printing by Electricity.—2 illustrations 9777

VIII. NAVAL ENGINEERING.—The Raising of Bauer's Submarine Boat.—The submarine boat of 1851 recently raised from the bottom of the sea where it sank over 36 years ago.—3 illustrations 9769

IX. PHOTOGRAPHY.—Photo-Engraving Processes.—A popular review of the subject of the reproduction of engravings 9775
Photographing a Bullet in Flight.—The method by which this feat was performed and the apparatus employed.—2 illustrations 9774

X. TECHNOLOGY.—Centrifugal Extractors.—By ROBERT F. GIBSON.—The mathematics and mechanics of the subject treated at length, with numerous cuts.—First instalment of the subject.—20 illustrations 9772

THE RETURN OF OLBERS' COMET OF 1815.

Prof. Brooks announced the discovery of a comet on Aug. 25. It took its place on the cometic annals of the year as "Comet *f* 1887 (Brooks)," and the discoverer was serenely unconscious that he had found a celestial pearl of great price. Other astronomers observed the new comer, and its elements and ephemeris were computed.

Olbers' comet of 1815 was expected about this time, on its first recorded return after an absence of over seventy years. A surprising resemblance was found to exist in the orbits of the two comets. Indeed, so close is the identity that there is scarcely a doubt that the comets are one and the same. Therefore, those who are fortunate enough to see the comet will behold the identical visitor that looked down upon our planet in 1815.

Olbers, a German astronomer, discovered the comet at Bremen, and Bessel, another German astronomer, calculated its elements. He assigned its next perihelion passage to February 9, 1887, and, wonderful to relate, the comet is but six months behind time.

Thus cometic astronomy has its triumphs. Pons' comet of 1812, also discovered by Prof. Brooks, looked down from the celestial depths after an absence of a little more than seventy years. Olbers' comet of 1815 now returns to shine in our sky after an absence of seventy-two years, and the dwellers on this planet in the year 1910 will doubtless behold Halley's superb comet spreading its gossamer train over their heads, on its third recorded return, after an absence of seventy-five years.

The latest comer among the comets is an ordinary specimen of the family, has a stellar nucleus and a faint tail, but will grow brighter until it reaches perihelion, on October 6. It will be seen, by consulting Prof. Brooks' chart, published last week in the SCIENTIFIC AMERICAN, that it is nearly north of Denebola on September 26. We wish it were larger and more favorably situated for observation; but we are none the less grateful that, in however humble form, Olbers' comet has made its first recorded return on August 25, 1887.

The Ninth International Medical Congress.

The Ninth International Medical Congress opened its sessions in Albough's Opera House, Washington, on Monday, Sept. 5. The attendance at the convention was extremely large, upward of 3,500 medical men being present. The surgeons and medical authorities of the Continent and of England were present in numbers. At 11 A. M. Dr. Henry M. Smith, of Philadelphia, chairman of the executive committee, called the meeting to order, and in accordance with his announcement it was opened formally by President Grover Cleveland amid great applause. Dr. Nathan Smith Davis, of Chicago, was nominated president of the congress. On the stage various notabilities were present, including Secretary Bayard, Surgeon-General Hamilton of U. S. Marine Hospital, and Deputy Surgeon-General Marston of the British service, among others. After the full list of officers, including a long array of vice-presidents, had been selected, Secretary Bayard addressed the meeting in a long address alluding to the vocation of science in the republic. It was very well received. Drs. Lloyd, of the British navy, Leon de Forges for France, Unna for Germany, Mariano Scenola for Italy, delivered short addresses on behalf of the contingents from their respective countries. Dr. Davis then delivered his presidential address.

The following day's proceedings comprised both business and pleasure. Many receptions and excursions were provided for. For the heading of papers the convention was divided into sections, so that comparatively small audiences heard many of the most important ones. Among the essayists may be named: Dr. Austin Flint, on "Fever, its Causes, Mechanism, and Rational Treatment;" Dr. Nicholas Senn, of Milwaukee, on "Intestinal Surgery;" Dr. John Homans, of Boston on "Laparatomy," based on 384 cases within the writer's own knowledge. This operation, involving opening the intestines for the removal of obstructions, has been several times performed successfully by Dr. William T. Bull, of this city. Before his work only one successful case was chronicled, performed by Kocher, of Berlin.

Dr. Cyrus Edson, of the Board of Health of this city, read a valuable paper on the "Milk Supply of Cities." The dissemination of scarlet fever, diphtheria, and typhoid fever by milk, already described by us, and the subject of the ptomaine "tyrotoxicon" in milk were treated of. Dr. Whitmarsh, of London, read a paper opposing the Pasteur treatment, in accordance with his well-known views.

The committee appointed to arrange for the next place of meeting reported in favor of Berlin, Germany. The date, as far as the year is concerned, is 1890. The day has not yet been fixed.

The proceedings terminated with a banquet on Thursday, September 8, though excursions and trips to Niagara and elsewhere prolonged the attendance of many of the foreign members.

Taken altogether, as regards the number present and the high rank of many of them in the profession, the quantity of papers read, and their importance, and in view of the many courtesies and attentions showered upon them by the society of Washington, the meeting may be pronounced one of the events of the year.

The Preparation of Arrowroot in Bermuda.

According to the last report of the United States Commissioner of Agriculture, it appears that of late years a considerable impetus has been given to the cultivation and preparation of arrowroot in Bermuda, and large quantities are annually exported from the island. In cultivation, the method adopted is very similar to that practiced in the culture of the common potato. The ground is first well manured and plowed deep; it is then harrowed and laid out in drills about six inches in depth and three feet apart. In these drills the roots are set about eight inches apart, covered with the plow, and the surface smoothed by harrowing. The plants require at least a year to mature, and economical planters set the drills somewhat wider apart, and introduce an intermediate row of the potato, the crop of which is ready for removal before it can injure the arrowroot crop. Indian corn is occasionally planted in these rows, which is cut for forage when green, as, if it is allowed to mature, the main crop would be impaired by it. The mode of preparing the fecula from the roots greatly influences its value, and the superiority of the Bermuda arrowroot is attributed to the extreme care and cleanliness exercised in the different processes of manufacture. The roots, after being collected, are washed, and their outer skin completely removed. This operation has to be performed with great nicety, as the cuticle contains a resinous matter which imparts color and a disagreeable flavor to the starch which no subsequent treatment can remove. After this process, the roots are again carefully washed, and then crushed between powerful rollers, which reduce the whole mass to a pulp. This is thrown into large perforated cylinders, where it is beaten by revolving wooden paddles, while a stream of pure water carries off the fecula from the fibers and parenchyma of the pulp, and discharges it, in the form of milk, through the perforated bottom of the cylinder, from whence it is conveyed in pipes and passed through fine muslin strainers into large reservoirs, where it is allowed to settle, and the water is drawn off. After being repeatedly washed, it is allowed to settle for some time, when the surface is skimmed with palette knives of German silver, in order to remove any slightly discolored particles which may appear on the top, and retaining only the lower, purer, and denser portion for drying for market. The rollers and cylinders are made of brass and copper, in order to preserve the purity of the material. The drying process is conducted also with great care and cleanliness. The substance is spread in flat copper pans, and immediately covered with white gauze to exclude dust and insects. These pans are placed on rollers, and run under glass-covered sheds when there is any danger from rain or dews. When thoroughly dry, it is packed with German silver shovels into new barrels, these being first lined with paper, which is gummed with arrowroot paste.

The Volunteer Chosen as Defender of the America's Cup.

After several unsuccessful attempts, a decisive trial race came off between the Mayflower and Volunteer, at New York, on September 16. The latter won by 16 minutes 2⅝ seconds over a 41⅛ mile course. The breeze was a strong one, and the Volunteer gained over 12 minutes of her lead in going ten miles to windward. The race was watched by the Thistle, which went over the course with the yachts. The final international contests are set for September 27, 29, and, if necessary, October 1, 1887. The Volunteer is beyond cavil our best boat, and it is to be hoped that she will win. If defeated, it will be a difficult task to get the cup back to America.

Alumina Bleaching Compounds.

Hypochlorite of alumina has long since been employed in bleaching, under the name of "Wilson's bleaching liquid," and has been preferred on the grounds that "it accelerates the bleaching process and deteriorates the fibers of the tissue much less than the chloride of lime." Up to the present, the usual method of manufacture has been by double decomposition of alumina sulphate and chloride of lime. "Experiments have proved that similar but still more energetic bleaching compounds of alumina are produced by the direct action of chlorine on aluminates, and especially on aluminates of sodium or calcium and of magnesium, whereby the use of chloride of lime is entirely obviated. These bleaching alumina compounds may be prepared either in the form of a solution or in a solid form." Chlorine is passed through a solution of the aluminate or over the solid substance till no more is absorbed. The inventor claims that the alumina compounds prepared in the manner he describes act as very rapid bleachers "in consequence of the delivery of ozonized oxygen." "The use of acid baths is also dispensed with; also these alumina compounds deteriorate the fibers much less than chloride of lime."—*R. Weiss, Oranienburg, Russia.*

© 1887 SCIENTIFIC AMERICAN, INC.

FOR STAR GAZERS.

As the earth has now reached that part of her orbit in which the constellation Perseus appears opposite the sun, and is therefore visible in the early evening and throughout the night, we have the opportunity of observing at a convenient hour the singular variations in the light of Beta Persei, or, as it is commonly called, Algol, the Demon Star.

As is generally known to those who possess even but a slight knowledge of the appearance of the heavens, Algol varies in the amount of light it emits to the eye to such a degree that, while its normal brilliancy is that of a second magnitude star, it is often seen to be only of the fourth magnitude, presenting at such a time a very insignificant appearance. This change occurs with the greatest regularity once in every period of two days twenty hours and nearly forty-nine minutes. For two days and about twelve hours the star shines with a luster equal to a second magnitude star, the rest of the period, amounting to about nine hours, being occupied in a gradual though very perceptible decline to the appearance of a fourth magnitude star and an equally perceptible increase to its normal brilliancy.

The dates upon which the rapid changes in the light of Algol may be conveniently observed during the evenings of the ensuing fall and winter are given in the following table, which notes the moment when the light of the star is at its minimum. As the eclipse, for such it undoubtedly is, occurs at the same instant for the whole earth, the time at which it may be observed is independent of the place of the observer, and in a region so large as that covered by the circulation of the SCIENTIFIC AMERICAN, there are many eclipses visible at each extremity which cannot be observed at the other. It is, therefore, necessary to cover at least the four standard time divisions of the United States.

The table includes every eclipse visible in any of the four divisions that occurs between the hours of 5 P. M. and 1 A. M.

STANDARD TIME.

EASTERN.	CENTRAL.	MOUNTAIN.	PACIFIC.
	SEPTEMBER.		
30th, 10:58 P. M.	30th, 9:58 P. M.	28th, 0:10 A. M. 30th, 8:58 P. M.	27th, 11:10 P. M. 30th, 7:58 P. M.
	OCTOBER.		
3d, 7:47 P. M. 21st, 0:40 A. M. 23d, 9:29 P. M. 26th, 6:18 P. M.	3d, 6:47 P. M. 20th, 11:40 P. M. 23d, 8:29 P. M. 26th, 5:18 P. M.	3d, 5:47 P. M. 20th, 10:40 P. M. 23d, 7:29 P. M.	18th, 0:51 A. M. 20th, 9:40 P. M. 23d, 6:29 P. M.
	NOVEMBER.		
12th, 11:11 P. M. 15th, 8:0 P. M.	12th, 10:11 P. M. 15th, 7:0 P. M.	10th, 0:22 A. M. 12th, 9:11 P. M. 15th, 6:0 P. M.	9th, 11:22 P. M. 12th, 8:11 P. M. 15th, 5:0 P. M.
	DECEMBER.		
3d, 0:53 A. M. 5th, 9:42 P M. 8th, 6:31 P. M. 25th, 11:24 P. M. 28th, 8:13 P. M. 31st, 5:2 P. M.	2d, 11:53 P. M. 5th, 8:42 P. M. 8th, 5:31 P. M. 25th, 10:24 P. M. 28th, 7:13 P. M.	2d, 10:53 P. M. 5th, 7:42 P. M. 23d, 0:35 A. M. 25th, 9:24 P.M. 28th, 6:13 P. M.	2d, 9:53 P. M. 5th, 6:42 P. M. 22d, 11:35 P. M. 25th, 8:24 P. M. 28th, 5:13 P. M.
	JANUARY.		
17th, 9:56 P. M. 20th, 5:44 P. M.	15th, 0:6 A. M. 17th, 8:56 P. M.	14th, 11:6 P. M. 17th, 7:56 P. M.	14th, 10:6 P. M. 17th, 6:56 P. M.
	FEBRUARY.		
6th, 11:38 P. M. 9th, 8:26 P. M. 12th, 5:14 P. M.	6th, 10:38 P. M. 9th, 7:26 P. M.	4th, 0:49 A. M. 6th, 9:38 P. M. 9th, 6:26 P. M.	3d, 11:49 P. M. 6th, 8:38 P. M. 9th, 5:26 P. M.

An extension of this table to the 24 divisions of standard time would show that every eclipse of Algol is visible from some quarter or other of the earth, though those that occur in May, June, and July would be visible from very limited regions, and under unfavorable conditions.

On the 30th of September, at New York, at the hour given for Eastern time, Algol is about four and a half hours high in the northeast. On the 12th of February, the star when eclipsed is almost in the zenith.

Those to whom this interesting subject is new, and who wish to observe this mysterious waning and waxing of the light of a star that far exceeds our own brilliant sun in dimensions, will find full directions for locating it by means of a map of the region in which it is situated, with many interesting particulars of the Demon Star, in the SCIENTIFIC AMERICAN SUPPLEMENT, No. 558, for September 11, 1886.

Aluminum Dental Plates.

The early use of aluminum was not satisfactory, as the metal was impure, owing to the presence of iron, and it soon succumbed to the fluids of the mouth. This was more generally true of cast plates, which were not only more difficult to make, but were not as good. The metal is not very easy to cast, as it does not flow freely like other metals, and the contraction is considerable, causing cracked blocks. When made from rolled plate and pure metal, aluminum for upper cases has proved very satisfactory in my hands, and not being very expensive is a recommendation, as it is a metal, and is thus better than rubber and less in cost than gold. It is very light and strong, perfectly tasteless and odorless, and as healthy to the gums as gold or platina. The teeth are best attached with rubber.—*Geo. H. Swift, West. Dent. Jour.*

The British Museum.

I made but two brief visits to the British Museum, and I can easily instruct my reader so that he will have no difficulty, if he follow my teaching, in learning how not to see it. When he has a spare hour at his disposal, let him drop in at the museum and wander among its books and its various collections. He will know as much about it as the fly that buzzes in at one window and out at another. If I were asked whether I brought away anything from my two visits, I should say, certainly I did. The fly sees some things, not very intelligently, but he cannot help seeing them. The great, round reading room, with its silent students, impressed me very much. I looked at once for the Elgin marbles, but casts and photographs and engravings had made me familiar with their chief features. I thought I knew something of the sculptures brought from Nineveh, but I was astonished, almost awe struck, at the sight of those mighty images which mingled with the visions of the Hebrew prophets. I did not marvel more at the skill and labor expended upon them by the Assyrian artists than I did at the enterprise and audacity which had brought them safely from the mounds under which they were buried to the light of day and the heart of a great modern city.

I never thought that I should live to see the Birs Nimroud laid open, and the tablets in which the history of Nebuchadnezzar was recorded spread before me. The Empire of the Spade in the world of history was founded at Nineveh by Layard, a great province added to it by Schliemann, and its boundary extended by numerous explorers, some of whom are diligently at work at the present day. I feel very grateful that many of its revelations have been made since I have been a tenant of the traveling residence which holds so many secrets in its recesses. There is one lesson to be got from a visit of an hour or two to the British Museum—namely, the fathomless abyss of our own ignorance. One is almost ashamed of his little paltry heartbeats in the presence of the rushing and roaring torrents of Niagara. So if he has published a little book or two, collected a few fossils, or coins, or vases, he is crushed by the vastness of the treasures in the library and the collections of this universe of knowledge.

I have shown how not to see the British Museum. I will tell how to see it. Take lodgings next door to it—in a garret, if you cannot afford anything better—and pass all your days at the museum during the whole period of your natural life. At threescore and ten you will have some faint conception of the contents, significance, and the value of this great British institution, which is as nearly as any one spot the *nœud vital* of human civilization, a stab at which by the dagger of anarchy would fitly begin the reign of chaos.—*Oliver Wendell Holmes, Atlantic Monthly.*

Minerals at the American Exhibition, London.

One of the most conspicuous features of the American Exhibition is the remarkable collection of minerals brought over and exhibited by Mr. A. E. Foote, of Philadelphia. Many of the specimens, which are extremely fine, have been obtained during collecting expeditions undertaken by Mr. Foote himself, and several new species and varieties have been made known to science through his indefatigable labors.

The central feature is a hexagonal pavilion covered with mica, and surmounted by a model of a snow crystal. Each side of the pavilion is devoted to a separate mineral region of the North American continent, except the first, which is filled with a collection of gems and ornamental stones. Here are rough and cut specimens of a precious ruby, topaz, opal, williamsite, with examples of malachite and azurite beautifully banded and taking a fine polish.

A lapidary who has had several years' experience in making rock sections for the British Museum is constantly employed close by.

Minerals from the region near the Pacific coast come next. Wulfenite, a rare species, some of the finest specimens ever seen, is here exhibited in large groups of orange-red crystals; also brilliantly red vanadinites and large bright crystals of chessylite or azurite associated with velvet tufts of malachite. All these are from the marvelous country that Humboldt called New Spain. The deep red garnets from Alaska in their somber settings of gray mica-schist are especially noteworthy. Among the minerals of the Rocky Mountain region are wonderful crystals of the green Amazon stone; ore from the famous Bridal Chamber at Lake Valley, New Mexico, so rich that the heat of a match will cause it to melt and fall in drops of nearly pure silver. A space the size of a moderate sized room produced about £100,000. The precious turquoise comes from Los Cerrilloz, New Mexico, where Montezuma got his chalchuhuitls that he valued above gold and silver. The Indians still make long pilgrimages for the sacred stone.

Most striking among the minerals of the Mississippi Valley and lake region are the blendes and galenas from Southwest Missouri, a district that now produces over one half of all the zinc mined in the world. It was formerly so abundant that farmers built their fences with it. Masses of the lead ore weighing ten tons were found within 12 feet of the surface. Here Indians formerly procured the lead for their bullets, placing the ore in hollow stumps and building a fire over it.

From Arkansas come fine rock crystals or hot spring diamonds, with powerful lodestones, arkansites, and hydrotitanites.

From the Lake Superior region come copper, chlorastrolites, and zonochlorite, a remarkable gem-like mineral.

In the case devoted to the North Atlantic coast region is rhodonite, so much used by the Russians in their ornamental work, in fine crystals. The mines at Franklin, N. J., produce also many minerals found nowhere else in the world, such as franklinite, named after the illustrious philosopher; anomolite, a new species recently described by Prof. G. A. Konig, of the University of Pennsylvania; troostite, jeffersonite, blood-red zincite, etc. Cacoclasite, a new species in fine crystals, associated with pink titanite, comes from the same region, as do the remarkable crystals of apatite. These are among the finest specimens ever seen, and associated with them are the brilliant twin zircons. From the apatite are manufactured hypophosphites to stimulate the appetite and superphosphates to grow wheat and corn.

The last case devoted to the South Atlantic coast region contains amethysts, sapphires, aquamarines, tantalite, gummite, and uranolite, huge sheets of mica, etc.

Next to the wall opposite is a very extensive collection, illustrating the mineralogy of Pennsylvania, which, besides the well-known coal, iron, and other ores that have made the State famous, includes very extraordinary specimens of the rare mineral brucite, from which the medicine Epsom salts may be made; diaspore in fine crystals, corundum for polishing purposes, chromite for producing brilliant yellows, etc.

Adjoining, in cases and drawers, are the college and educational collections, indispensable for the studies of mineralogy, geology, and chemistry.

The collection of American geological surveys and other scientific works is very extensive, over fifty volumes from Pennsylvania alone being shown. We have devoted so much space to the description of the extensive exhibit made by Mr. A. E. Foote, of Philadelphia, that we can only refer to the minerals shown by Kansas and other States, by the Denver and Rio Grande and C., B., and Q. railroads, and by various mining companies.—*Nature.*

How to Act at a Fire.


In a lecture before the Society of Arts, London, Mr. A. W. C. Ghean gave the following concise and simple directions how to act on the occurrence of fires. Fire requires air; therefore, on its appearance every effort should be made to exclude air—shut all doors and windows. By this means fire may be confined to a single room for a sufficient period to enable all the inmates to be aroused and escape; but if the doors and windows are thrown open, the fanning of the wind and the draught will instantly cause the flames to increase with extraordinary rapidity. It must never be forgotten that the most precious moments are at the commencement of a fire, and not a single second of time should be lost in tackling it. In a room, a table cloth can be so used as to smother a large sheet of flame, and a cushion may serve to beat it out; a coat or anything similar may be used with an equally successful result. The great point is presence of mind—calmness in danger, action guided by reason and thought. In all large houses, buckets of water should be placed on every landing, a little salt being put into the water. Always endeavor to attack the bed of a fire; if you cannot extinguish a fire, shut the window, and be sure to shut the door when making good your retreat. A wet silk handkerchief tied over the eyes and nose will make breathing possible in the midst of much smoke, and a blanket wetted and wrapped around the body will enable a person to pass through a sheet of flame in comparative safety. Should a lady's dress catch fire, let the wearer at once lie down. Rolling may extinguish the fire, but if not, anything (woolen preferred) wrapped tightly round will effect the desired purpose. A burn becomes less painful the moment air is excluded from it. For simple burns, oil or the white of egg can be used. One part of carbolic acid to six parts of olive oil is found to be invaluable in most cases, slight or severe, and the first layer of lint should not be removed till the cure is complete, but saturated by the application of fresh outer layers from time to time. Linen rag soaked in a mixture of equal parts of lime water and linseed oil also forms a good dressing. Common whiting is very good, applied wet and continually dampened with a sponge.

ENAMELED or glazed bricks, for outside or interior decoration, are made by applying to the surface a flux, which, during the burning, causes the silex to melt and form a vitreous covering. Such flux is easily colored, and thus very beautiful fancy bricks produced.

© 1887 SCIENTIFIC AMERICAN, INC.

A LOW PRESSURE BOILER FOR STEAM HEATING.

A boiler of simple construction, designed to be very economical of fuel, and more especially intended to serve for steam heating purposes, is shown in the accompanying illustration, and has been patented by Mr. James S. Priest, of Manayunk, Philadelphia, Pa. Within the main inclosing case is arranged a crescent-shaped boiler and crescent-shaped fire chamber, the latter extending back about midway of the lower half of the boiler proper and also projecting forward beyond the front end of the boiler. The boiler proper has two series of flues, one series extending direct from the fire chamber through the lower portion of the boiler to a rear chamber, as shown in dotted lines, and the other series extending from this rear chamber to the front, whence the products of combustion pass rearward over the boiler to an exit flue. The crown sheet of the fire chamber has a number of copper plugs, so that the heat will be more quickly transmitted to the water within the boiler. In the back wall of the boiler case is a doorway, normally closed, similar to one shown in front, to give access to the flues for cleaning them.

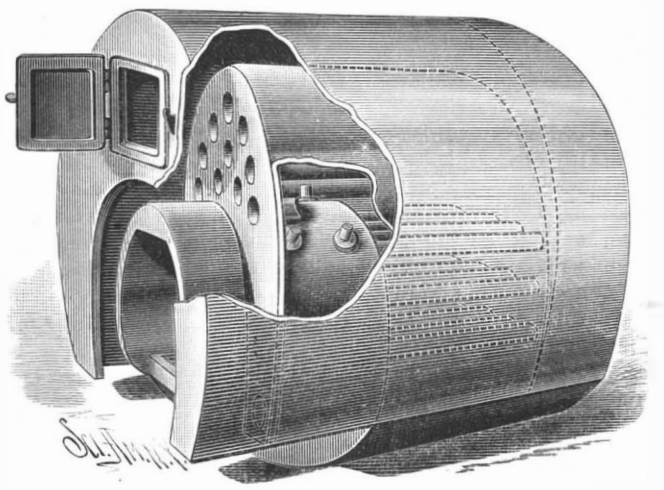


PRIEST'S BOILER FOR STEAM HEATING.

AN IMPROVED PULVERIZING ATTACHMENT FOR SEEDERS.

A device for thoroughly pulverizing and breaking all clods and lumps in the ground passed over by a seeder is shown in the accompanying illustration. Upon the seeder beam is clamped a segmental rack, its lower portion affording a bearing for a short shaft which carries a rigidly connected arm supporting a sectional hub, in which are fixed radially extending curved blades, while integral with this shaft and arm is a nearly vertical lever held at such angle as may be desired by moving a pin in the segmental rack. The upper ends of the blades are made substantially in the form of sectors, so that when a series of blades are inserted in the hub sections their approaching edges will abut the one against the other, as shown in Fig. 1, a single blade being represented in Fig. 3. The preferred way of making the short shaft, wheel shaft, arm, and lever, all cast in one piece, is shown in Fig. 2. Just to the rear of the journal of the sectional hub is mounted a cultivator shovel, the standard of which, with a rearwardly extending brace, is held to the beam by side clips, their forward retaining bolt being above and their rearward retaining bolt below the beam. The clip on the side of the beam next the pulverizer blades is made with an extension, by which it is carried toward the blades and then down and to the rear in a vertical plane substantially parallel with the edges of the blades, thus forming a clearer for them.


For further particulars relative to this invention address the patentee, Mr. Anthony Torgerson, Barnes, Barnes County, Dakota Ter.

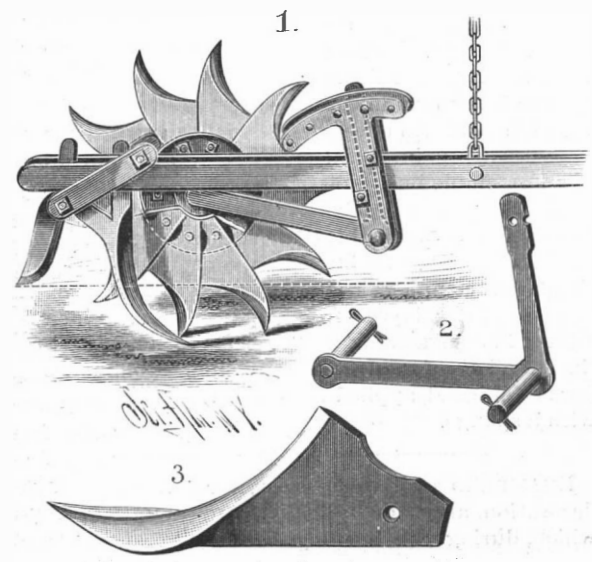

TORGERSON'S PULVERIZING ATTACHMENT FOR SEEDERS.

AN IMPROVED ADJUSTABLE SCHOOL SEAT.

A school seat in which the seat and back, as well as the foot rest, are adjustable to suit the size or height of the scholars is shown in the accompanying illustration. The seat may be of a length to accommodate one or more scholars, and may be constructed of wooden slats secured upon metallic frames, or it may be made of wood in the form shown in the two smaller figures. The uprights are made with brackets projecting forwardly from their upper corners, and having a series of steps on their inner sides. The rear corners of the sides are likewise constructed with forwardly extending guide arms or brackets. The lower front corners of the seat frame are adapted to rest upon the steps of the uprights, while their lower rear corners have laterally extending studs or lugs adapted to rest in notches in the rear side of a slot formed in a lever pivoted to the outer side of each of the uprights, these studs bearing against the forwardly projecting guide arms, and preventing the seat from sliding backward off the steps. The back is secured to the upper ends of the side levers, which are thereby connected and braced. The front sides or edges of the uprights have steps adapted to support the inner ends or edges of the foot boards or rests, the front or outer edges of which are supported in a series of notches formed in brackets attached to the desk standards. With this construction, as the seat is raised or lowered, the back is simultaneously thrown in a rearward or forward direction. To raise the seat, it is only necessary to move the lugs into a higher notch in the side levers and then raise the front ends of the frames to a correspondingly higher step, when the seat will be firmly held until its rear edge is again raised for the purpose of placing it at a different height.

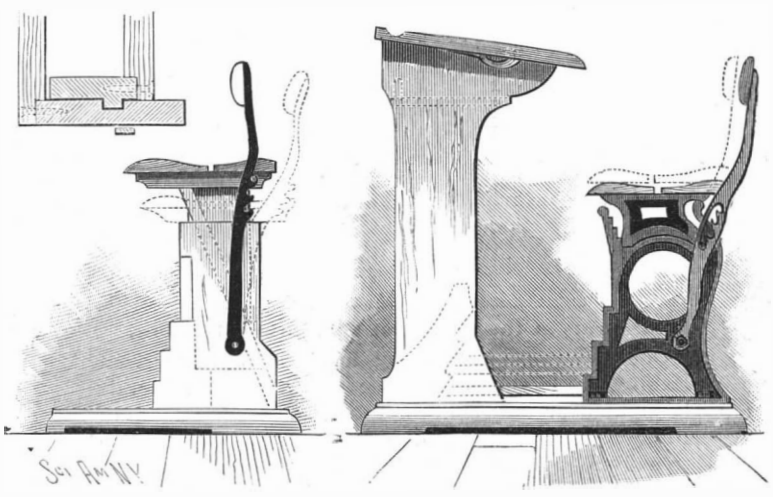

PEDERSEN'S ADJUSTABLE SCHOOL SEAT.


This invention has been patented by Mr. Johannes Pedersen, of Copenhagen, Denmark, and further information relative thereto may be obtained of Mr. Robert Richardi, P. O. box No. 773, New York City.

The Possible Consequences of Using Natural Gas.

A writer in the Cincinnati *Commercial Gazette* says that two hundred years ago, in China, there was just such a craze about natural gas as we have in this country to-day. Gas wells were sunk with as much vim and vigor as the Celestials were capable of, but owing to a gas explosion that killed several millions of people and tore up and destroyed a large district of country, leaving a large inland sea, known on the maps as Lake Foo Chang, the boring of any more gas wells was then and there prohibited by law. It seems, according to the Chinese history, that many large and heavy pressure gas wells were struck, and in some districts wells were sunk quite near to each other. Gas was lighted as soon as struck, as is done in this country. It is stated that one well with its unusual pressure, by induction or back draught, pulled down into the earth the burning gas of a smaller well, resulting in a dreadful explosion of a large district, destroying the inhabitants thereof. Lake Foo Chang rests on this district. The same catastrophe the writer thinks is imminent in this country unless the laws restrict further developments in boring so many wells. Should a similar explosion occur, there will be such as upheaval as will dwarf the most terrible earthquakes ever known. The country along the gas belt from Toledo, through Ohio, Indiana, and Kentucky, will be ripped up to the depth of 1,200 to 1,500 feet and flopped over like a pancake, leaving a chasm through which the waters of Lake Erie will come howling down, filling the Ohio and Mississippi valleys and blotting them out forever.

A CONVENIENT HOLDER FOR RIBBONS, EDGINGS, ETC.

A simple and inexpensive device for holding ribbons or like narrow fabrics within a case, secure from injury by dust and light, and so as to allow ready inspection or sale of the goods, is shown in the accompanying illustration, and has been patented by Mr. George A. Loyd, of Loveland, Col. The case has one fixed head, the other head having pins which enter open slots in the edge; and the spool on which the ribbon is wound, either with or without a measuring tape or band between its coils, is provided with an axial shaft, on one end of which is a crank arm, that may be folded down flat when not in use, as shown in the sectional view, Fig. 2. The other head of the case is provided with a bail, wire, or handle, which may be folded down. The outer end of the ribbon is passed through a guide slot, where it is held in position to show the goods by a spring clamp, attached to a short elastic plate, soldered or otherwise fastened to the face of the tube.

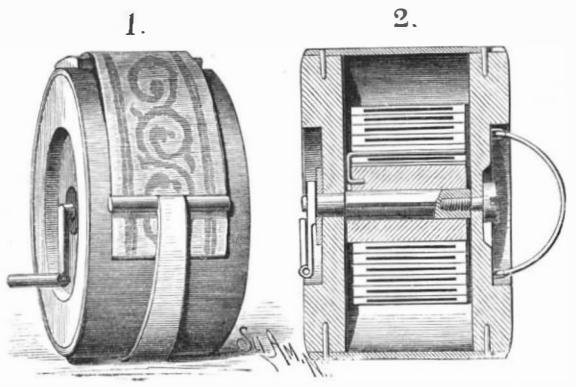


LOYD'S RIBBON HOLDER.

The Glasgow International Exhibition.

In the last issue of this paper, page 182, a résumé of the industries to be represented at the above exhibition was amply set forth. We have now to call attention to an advertisement on another page, giving further information of importance to those contemplating the exposition of their wares. From the prospectus before us, it is evident the Scotch people intend their exhibition shall not be behind any of their neighboring countries in point of size or interest. It is important that those intending to exhibit should apply for space without delay, as the limit of time for applications for space is set for November 1 next. It has been suggested that those industries which are to be represented in the Paris International Exhibition of 1889 might be readily transferred from Glasgow to Paris, after the closing of the Scotchmen's exhibition.

A READY-RECKONING COIN PACKAGE.

A coin package which may be depended upon to hold an equal and exact number of coins of the same denomination in a given space, so that the coins may be viewed and counted without opening the package, is represented in the accompanying illustration. It is made up of a series of packages, each having slits in its side, and with covering and uniting flaps, the latter made integrally with the body of the package, and each lapping the fellow or companion package of the series. The fact that coins are never so abraded by wear as to allow room for one more in such spaces as are assigned in this package renders it practically a self-counter, in which there can be no danger of "shorts" or "overs," and its convenient shape admits of thus uniting several packages of the same or of different denominations into one compact bundle, and of dividing them at pleasure, the different parts still remaining intact. For further information, address the patentee, Mr. George L. Castner, care of Hartmers & Co., Memphis, Tenn.

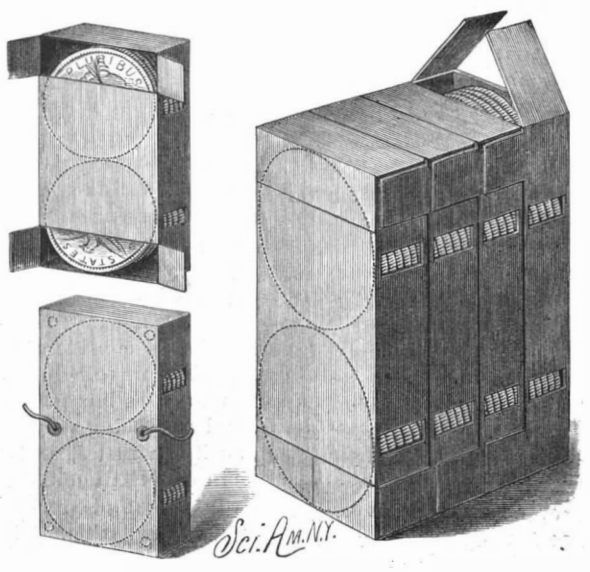

CASTNER'S COIN PACKAGE.

© 1887 SCIENTIFIC AMERICAN, INC.

SPLENDID WORK DONE BY RUBBER BELTS.


The high standard of efficiency which can be realized by the employment of strictly first-class rubber belts is now receiving merited recognition from users who have had them in severe service for many years, and whose experience cannot fail to be of value to all mill owners and furnishers of factory equipments. In the matter of simple tensile strength, the superiority of these belts has long been conceded. In ordinary work, however, this consideration is practically of far less importance than that of having a belt which will hug the pulley tightly, or with which there will be no "slip." In this particular, whether the pulleys used be of the ordinary iron pattern or whether they be covered with leather, rubber, paper, or other material, the rubber belt has incontestably the advantage, as it will never slip under any service to which a belt of nearly suitable size for the power required can be subjected, whether the pulleys be covered or not. The slipping of belts is one of the most troublesome incidents in many shops, and it is not infrequent to find mechanics rubbing them with beeswax, resin, and other substances, to prevent slipping. This should never be done with any kind of belt; but where a rubber belt is used, the slipping, which affords a temptation to resort to such expedients, does not occur.

In the accompanying illustration we show two large belts of this kind recently completed by the New York Belting and Packing Company, each of them nearly half a mile long. These belts were sent to West Superior, Wis., and each of them weighed 11,000 pounds. Had they been made of leather, they would have required at least 500 selected hides to manufacture each one of them. At the same time the company also furnished a driving belt 52 inches wide, eight-ply, 298 feet long, and weighing 4,000 pounds.


In the larger picture may be seen a belt 2,700 feet long, recently made for the Pennsylvania Railroad Company, and in use in one of their grain elevators in Jersey City. This belt is used to convey grain from one end of the immense building to another, the grain being delivered upon the belt from another belt, and being taken off by a simple form of guide arm at any portion of its length, as well as at the end, and conducted into chutes for delivery to vessels at the dock. The belt runs on small rollers, and there is a simple form of tightener at the ends, by which it can be readily kept straight and even. In making conveyer belts of this description the company has long held a leading place, the superiority of such belts in point of economy, as well as of efficiency, being equally pronounced.

Perhaps the most important consideration of all to be taken into account in fitting up machinery is to have the plant so provided with power that there shall be no "breakdowns." Such mishaps necessitate the waiting of workmen in time they are paid for, as well as delay of the work, and involve an increased expense in the cost of production, which is seldom estimated at its true importance. In fact, there is no room allowed at all for such an item of cost with the close figuring practiced in many of our large industries at the present day, although it occurs with more or less frequency in every business. As touching this point, the company last year received a highly significant testimonial of the durability of one of their belts under heavy service. It was a main driving belt, 48 in. wide and 320 ft. long, six-ply, used in Central elevator "B," Chicago, and had been in constant service from September, 1869, until April, 1886, a period of sixteen years and seven months. The uninterrupted use for so long a period of so large and heavy a driving belt affords the best possible practical gauge of the character of its manufacture. The great tensile strength of rubber belting is due to its web of heavy cotton duck, the rubber being driven through and through its meshes by powerful machinery. The fabric used for this purpose is made expressly for the company by Brinckerhoff, Turner & Co., of New York, and has more than double the strength of the heavy cotton duck used for sails of ships. The preparation of the rubber itself is, however, a long and very elaborate process, in which the present manner of working has only been reached after years of experiment. The sulphur to be used in the vulcanizing is carefully tested and weighed, as are also the different metallic oxides, making a semi-metallic compound, which gives the surface of the belts a high degree of firmness, while there is yet sufficient elasticity to allow of their hugging the pulley closely, and enables them to resist a high degree of heat, so that their surfaces may not be injured by friction. The several thicknesses of rubber-impregnated duck which go to make the several weights of belts are so arranged, by the folding over of the outside strip, as to present a perfectly even and half round edge, and then passed between powerful heated rollers. Subsequent to this the large belts are finished in an immense steam press, said to be the largest of the kind in the world, and calculated to completely take the "stretch" out of the largest sized belt. The press will take a belt six feet wide and fifteen feet of its length, steam being let into its bed and platen so that the temperature can be readily regulated, and the pressure and heat applied while the belt is under the full tension of the heaviest strain it may be desired to put upon it, thus setting its fibers as compactly as they are formed in a steel spring. The company owns the patent for this stretcher, in combination with the press, as well as many other patents of great value in the business.

The principal factory of the company, and the oldest one engaged in the rubber business, is at Newtown, Conn., although they have another one at Passaic. The offices, salesroom, and warehouse are at No. 15 Park Row, New York City. John H. Cheever is the treasurer of the company and general manager of the business.

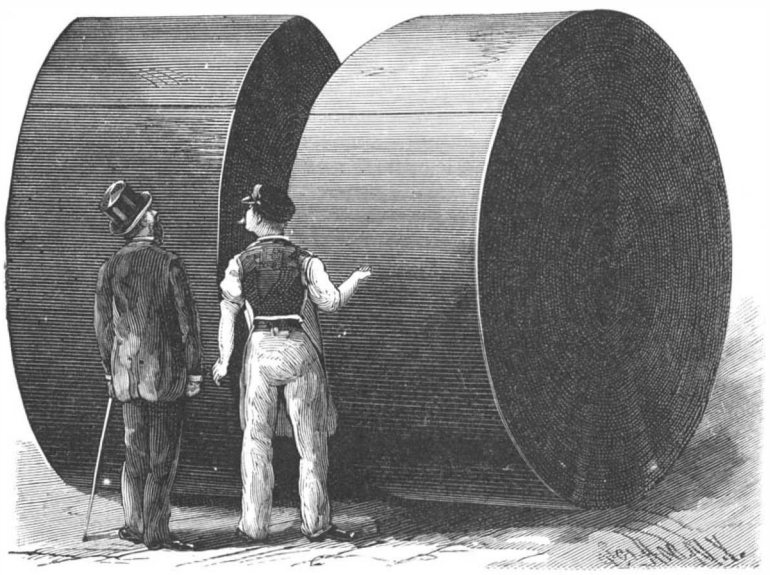

LARGE RUBBER BELTS.

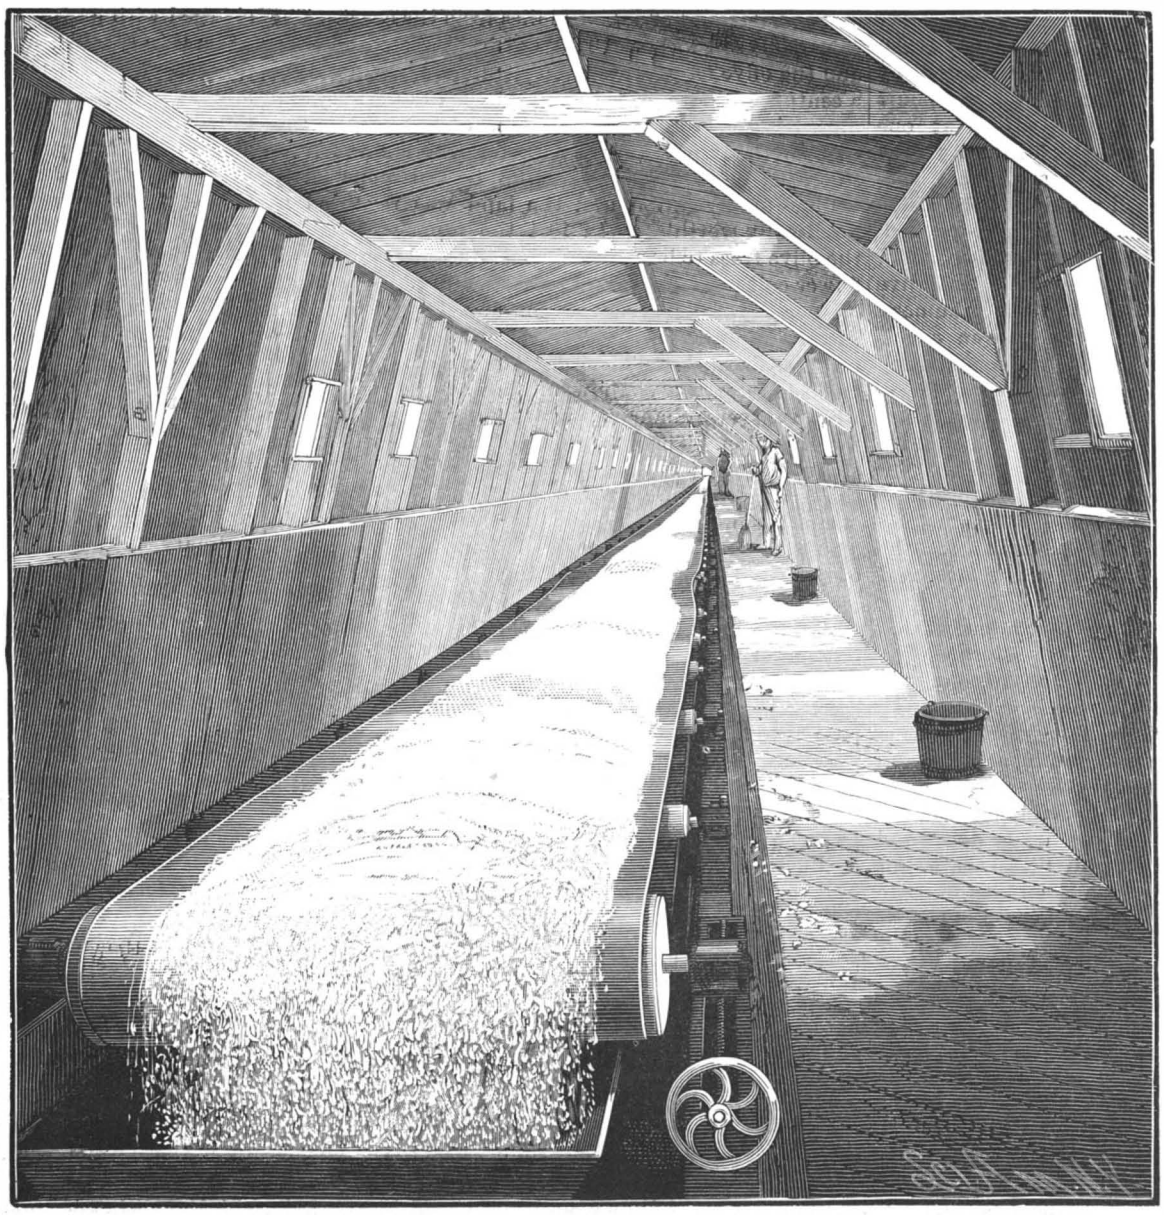

A BIG GRAIN ELEVATOR BELT MADE BY THE N. Y. BELTING AND PACKING CO.

Tyndall on Lightning Rods.

Professor Tyndall, in a letter on lightning conductors, points out that the abolition of resistance is absolutely necessary in connecting a lightning conductor with the earth, and this is done by closely embedding in the earth a plate of good conducting material and of large area. The largeness of area makes atonement for the imperfect conductivity of earth. The plate, in fact, constitutes a wide door through which the electricity passes freely into the earth, its disruptive and damaging effects being thereby avoided. A common way of dealing with lightning conductors adopted by ignorant practitioners is, Dr. Tyndall remarks, to carry the wire rope which forms part of the conductor down the wall and into the earth below, where it ends without any terminal plate. Such a "protection" is a mockery, a delusion, and a snare. Some years ago a rock lighthouse on the Irish coast was struck by lightning, when he found by the engineer's report that the lightning conductor had been carried down the lighthouse tower, its lower extremity being carefully embedded in a stone perforated to receive it. If the object had been to invite the lightning to strike the tower, a better arrangement could hardly, he believes, have been adopted. He vetoed the proposal to employ a chain as a prolongation of the conductor, as the contact of link with link is never perfect.

A Simple Test of Kerosene Oil.

Take an ordinary pint tin cup. Fill it within an inch of the top with water warmed to the temperature of 120° F. Pour on this water three or four tablespoonfuls of the oil to be tested. Stir the oil and water together, and wait a short time, say a minute or two, for the oil to collect on the top. Try the thermometer again, and if the temperature is more than one degree from 120° F., add a little cold or hot water, as the case may be, so as to bring the temperature to within one degree of 120° F. Then stir again and give time, as before, for the oil to come to the top. Now apply a burning match or lighted taper on a level with the top of the cup, say within half an inch of the oil. If within one second no flash occurs, the oil is reasonably safe; otherwise, it is unsafe. Purchase four or five gallons of oil at a time, and apply this test at each purchase.—*Bulletin N. C. State Board of Health.*

Graphitic Carbon.

Mr. H. Warren has succeeded in producing a very dense graphitic carbon for incandescent electric lighting by passing the electric discharges from an induction coil between two electrodes inclosed in a vessel containing illuminating gas. The graphite forms at the negative electrode and gradually elongates toward the positive pole. This carbon burns in oxygen without leaving any residue. —*Annales Industrielles.*

© 1887 SCIENTIFIC AMERICAN, INC.

Stove Bronzes and Tiles.

An unusually large number of stove dealers from out of town, says the *Mail and Express* (New York), have been in the city the last few days purchasing their fall supplies. There is the liveliest sort of a craze for stoves ornamented with fancy tiles and bronze images.

"Why, the stove has now got to be as ornamental as any other part of the house," said Mr. Henry Gleason, an active member of the Republican Club, who has made the subject of stove decoration a special study for years, "and the consequence is that just now all the manufacturers are doing their best to get ahead of one another in this matter of stove decoration. The result will be to put on the market this fall stoves that in ornamentation will surpass anything ever before made. You remember when Oscar Wilde was here, about six years ago? Well, the change began then, and was caused by his criticising our stoves and calling them of a pump log style, decorated with funeral urns. The same year a company was started to make tiles and bronzes for stoves, and the result is seen to-day in a complete revolution in the stove trade. Now the manufacturers are seeing who can turn out the most giddy stove. They are putting lots of money in it too. Many recent models are from plaster casts, and I know of complete sets of castings that cost $10,000 and $15,000 each."

Among the bronze figures that are the rage for stoves are Roman warriors, gladiators, Knights of the Red Cross on horseback, Charles V., Joan of Arc, which is a great favorite, and many "Mikado" characters. One of the favorite pieces is the "The Flute Players," which was modeled after the original in the Stewart collection. The figure is placed on the top of the stove, and does away wholly with all suggestion of the "funeral urn." All these bronzes are so tastefully got up and look so much like the real article that, as a rule, they are taken from the stove and used as mantel ornaments during the summer.

Another reason given why they are so greatly in favor is that a system has been discovered here for making them very cheaply. Sometimes the models are designed in this country, but in most cases an imported French bronze piece is bought and used as a model. This costs perhaps $10. The purchased model is divided into pieces with the aid of a blowpipe, and a separated plaster cast is made of each piece. This is done because it is impossible to cast cheaply the entire figure in one mould. From these plaster casts brass moulds are made, which, when finished, are given to the casters. Then begins the work of making the figures. One caster has, for example, the mould of the left arm, another that of the right arm, and so on until all parts are distributed. The different casters fill their ladles with molten spelter, each ladleful being enough to make a number of casts. Holding the mould in his left hand, which is protected by a covering of heavy cloth, the caster quickly pours the spelter through a funnel-shaped orifice at one end of the mould, until the latter is filled. As soon as the mould is filled the spelter is poured back into the ladle, leaving a thickish shell clinging to the inside of the mould. With a single blow the latter is opened, and out drops a complete cast of silvery-looking metal, the entire operation not having taken more than five seconds. The pieces are then taken to the trimmers, who, with machinery, cut away the uneven edges. Next the pieces are carefully joined and soldered by expert workmen. The next operations are "buffing" or smoothing the surface, which is done with a mixture of grease and find sand, and "washing," which is to dip the figure in potash and then wash it. Then the figure is ready for the plater, who gives it a wash in brass, copper, or other solutions, after which the finishing touches are put on, and it is ready for the market. The figure can be sold for $1, with a reasonable profit left for the manufacturer.

It is estimated that of tiles to be used in decorating stoves, more than one million will be sold this year. They are made in all tints and sizes, and in colors the American make now exceeds both the French and the English. More than 300 designs have recently been made up here, including romantic and ideal heads and scenes, warriors, celebrated people, flowers, etc., and the like. They are placed on all possible parts of the stove, and are particularly effective on the doors and open work around the center. Small tiles are also put on the knobs of the doors, and it is even beginning to be the thing to ornament cooking stoves and ranges in this fashion.

The clay used in making these tiles must be white, hard, strong, and of uniform shrinkage. To get this a mixture is prepared and ground to dust, the clear whiteness of which is due to the presence of North Carolina china clay. This dust is dampened and the clay is then ready for the press. This is an upright affair, with a long lever or a wheel operating a screw press. The lower end of the screw carries a die plate, and the bed has a matrix. From a box at his hand the operator takes a scoopful of the dampened clay dust, fills the matrix and evens it off. A turn of the wheel is made, and the die imprints itself sharply and firmly into the clay. The tile is now perfect in shape. Air drying for several days comes next, to evaporate all moisture, after which the clay becomes sufficiently hard to be handled without breaking. Before being placed in the kiln, for the firing process, the air-dried tiles are packed in earthenware boxes called saggers, which are tightly closed to preserve their contents from discoloration. When packed the saggers are carried into the kiln and built up in rows, tier above tier, until the entire kiln is filled. Then the door is built up with fire brick, the interstices are filled with clay, and the fires are started. After the firing is completed the tile is ready for glazing. A glaze is, in fact, a coating of glass. After being ground to dust, the glaze is mixed with water and applied with a brush, or the tile is dipped in it. After this comes the final firing in a muffled kiln, heated by radiation. This process lasts four days, and then the tile is ready for use.

Flower Farming and Perfume Manufacture in Southern France.

For nearly a century the culture of flowers on a large scale and the manufacture of perfumes and essences have formed a special and lucrative industry in Southern France. The principal district in which the manufacture is carried on is at Grasse, in the department of the Alpes Maritimes; but it is also conducted on a more or less extensive scale at Sommieres, Nimes, Nyons, and Seillans. The descriptions of flowers principally grown, and their season of harvest, are the violet, jonquil, and mignonette, which are usually gathered in February, March, and April, although, in mild, moist winters, the violets commence as early as December; roses and orange blossoms, with thyme and rosemary, in May and June; jasmines and tuberoses in July and August; lavender and spikenard in September; and the acacia in October and November. The flower harvest covers, therefore, about three-fourths of the year, but the season of greatest activity is May and June, when the roses and orange blossoms are gathered. Thyme, rosemary, and lavender are among the minor products grown principally by small farmers of the grape and olive, who have at home the simple apparatus for distilling the flowers, and they produce a more or less inferior class of essences, which are used to dilute and adulterate the superior essences produced at the large establishments in towns and villages.

Consul Mason, of Marseilles, in a recent report upon flower farming in Southern France, says that the conditions of industrial success in flower growing can be best studied by a specific example, and he quotes the case of a plantation at Seillans in the department of the Var. This farm is about twenty-three acres in extent, and is situated on the southern slope of the hills, about 2,000 feet above the level of the Mediterranean, and at a distance of twenty miles from the coast. The calcareous soil was originally naturally poor and thin, and the olive trees, which had occupied the ground for a century or more prior to 1881, yielded but scanty and unsatisfactory returns. The slope of the surface was so steep that the waters of a spring which flows from the rocks above the track could be but imperfectly utilized for irrigation, and the land was regarded as practically worthless. In 1881 the proprietor caused the olive trees to be removed, and the land prepared for flower culture. The ground was first dug up to a depth of four feet, the larger stones removed and built into sustaining walls for the terraces into which the surface was divided and leveled. Along the upper margin of each terrace a shallow ditch was cut, connecting with transverse channels which supply the spring water for irrigation. The abruptness of the slope will be indicated by the fact that, on the tract of eighteen acres, the terrace walls required to produce a series of level or gently sloping surfaces are over 2,000 yards in length. Thus terraced, the tract yielded about seventeen acres of prepared ground for planting. In the autumn of 1881, 45,000 tufts of violets and 140,000 roots of the white jasmine were planted. The following spring the remainder of the ground was planted with roses, geraniums, tuberoses, and jonquils, and a laboratory erected for the manufacture of perfumes. The position proved to have been well chosen, as the flowers grew vigorously and well, and in 1885, the fourth year after planting, this farm, which had previously yielded a rental of £23 a year, produced perfumes valued at £8,630, giving a net profit of £1,553. This is sufficient to illustrate how lucrative flower farming may become in favorable districts and under good management.

From observation at Seillans and in the neighborhood of Grasse, where perfume flower growing is the leading industry, Consul Mason says that the essential conditions appear to be an altitude of from five hundred to two thousand feet. Flowers grown on such elevated positions are said to be richer in perfume than similar varieties which bloom in valleys and lowlands; a soil rich in calcareous elements, a situation sheltered from cold northern winds, and not subject to the white frosts which in spring and autumn affect the damp lowlands. In countries like Southern France, where the rainfall is always scanty, and often wanting entirely from May until September, irrigation is essential to the culture of flowers as well as every other crop. It is said the perfume growers and distillers on the Mediterranean coast attribute their success not less to the peculiar climate of Provence than to their knowledge of every detail of the industry, a knowledge acquired by more than a century of experience, and transmitted from generation to generation. One essential principle in perfume culture is that all fancy and "improved" varieties of flowers are discarded, and the natural, simple, old-fashioned kinds are exclusively grown.

The roses on the slopes of Seillans are the common pink ones, and the single wild violet is preferred to all the larger artificially developed varieties. Only the white jasmine is used, the yellow and less fragrant variety appearing to be either discarded or unknown. Jasmine plants are set in rows about ten inches apart, and are closely pruned. Roses are grown on the lower terraces, and are also cut low, and the ground between the plants heavily manured. After the roses have been gathered, the stem is cut to within a few inches of the ground to preserve for the next season the entire vigor of the plant.

During the harvest season traders or "middle men" go through the country every day with wagons collecting flowers from the farms, for which they pay prices varying according to the extent of the crop and the demands of the market. Their loads are hurried to the nearest manufacturer, and delivered while the flowers are still fresh and crisp. The flowers are usually gathered in the morning, as soon as possible after the dews of the preceding night have disappeared. The manufacture of perfumes includes the making of pomades and oils by the process of absorption, and of essences and essential oils by distillation. Every complete establishment is provided with apparatus for all these processes. Pomades are the commercial vehicles for absorbing and transporting the perfumes of the jonquil, tuberose, jasmine, and other species of flowers. A square frame or *chassis* of whitewood, about twenty inches by thirty in size, is set with a pane of strong plate glass. On either side of the glass is spread a thin even layer of grease—two parts lard to one of tallow—which has been purified and refined by previous boiling and straining. Thus prepared, the frames are piled up in ranks, six or seven feet high, to await the season of each special flower. When the blossoms arrive, the petals are picked from the stem, and laid so as to cover the grease in each frame. These being again piled so as to rest upon their wooden edges, which fit closely together, there is formed a species of tight chambers, the floors and ceilings of which are of grease, exposed to the perfume of the flower leaves within; the grease absorbs the perfume, the spent flowers are removed daily and fresh ones supplied, and this process goes on from two to four or five months, according to the desired strength of the pomade, which, when sufficiently charged with perfume, is taken from the glass with a wide, thin spatula, and packed in tin cans or *stagnons* for export. By these methods the delicate odors of flowers are extracted, and retained for transport to distant markets, where the grease, being treated with alcohol, yields the perfume to that stronger vehicle, and produces the floral waters and extracts of commerce. Coarse pomades are made by boiling the flowers in the grease, and subjecting the residue to pressure. The spent pomades are used for toilet purposes and in the manufacture of fine soaps.

The process of preparing perfumed oils involves the same principle, except that instead of solid grease, superfine olive oil is used. With this oil, pieces of coarse cotton fabric are saturated, which are then spread upon wire netting framed in wooden *chassis* about three feet by four in size. The flowers are spread upon the saturated cloths, and the frames piled one upon another, so that the perfume of the flowers is absorbed, as in the previous process. Essences and scents are produced by ordinary distillation, in which the flowers are boiled with water in large alembics. The vapor carries off the perfume, and is condensed in adjoining copper tanks. Some of the retorts used for this purpose are of sufficient size to receive at once half a ton of fresh flowers, with the requisite water for their distillation. When scents are to be produced, alcohol is used in the distilling tank to receive the perfumes. By skillful combinations of the perfumes of different flowers, sometimes with the addition of chemicals, a large variety of scents, such as "patchouli," "jockey club," etc., are produced at the original laboratory. The work of the manufactories is largely done by women, who earn from tenpence to one shilling for a day's labor of ten hours, and during the busy season of roses and orange flowers, they earn half as much more by working until midnight, or even later. —*Jour. Soc. Arts.*

Pneumonia.

It is generally supposed that pneumonia is due to the accidental penetration of specific microbes into the system, but the observations of M. Jaccoud, a French student of the subject, show that the disease really results from the development, under favorable conditions, of microbic germs permanently present in the system. A chief condition of such development is a sudden chill, which explains the frequent coincidence of lung affections with abrupt changes of temperature.

© 1887 SCIENTIFIC AMERICAN, INC.

Correspondence.

Self-Mending Snakes.

To the Editor of the Scientific American:

In your issue of the third instant, I observe an article on the "Glass Snake," or on one variety of that somewhat diverse species. My acquantance is with a somewhat different one, which, so far as I know, is simply a snake, and not in any sense a lizard. I have seen many of them in earlier days here; but never saw one more than about 18 inches long. They are very beautiful, being a kind of steel gray and black, in small broken checks on the back, with two slightly defined stripes along either side, so far back as the vital organs extend. But I believe that you, like most scientific writers, are inclined to scout the idea of these snakes "putting themselves together" and crawling away after being broken in pieces. Now, facts are facts, no matter what philosophy may say. About ten years ago I caught one of these reptiles, broke him in pieces from one to two inches long, from the anus to the tip of his tail—two-thirds of the whole length of the way—then placed a cage over him so that he could by no means escape, and mistakes were impossible. Then, on returning to the place twenty-four hours after, the snake was there, sound and whole, in full length. On close examination, however, I could see where most of the breaks had been, and the first section, about an inch and a half long, was not perfectly in place, so that the fine longitudinal lines of the figure were perhaps one-sixteenth of an inch out of the way. The remaining fractions corresponded, not with that, but with the body. I did not know then that this putting together process was seriously controverted by scientific men, and supposed from previous careless experiments that it was only the illiterate who doubted.

OLIVER WHITE,
Secretary of the Peoria Scientific Association.

Peoria, Ill., Sept. 6, 1887.

Annealing and Tempering Fine Tools.

To the Editor of the Scientific American:

Having had about twenty-five years' experience as a tool maker, I feel confident that I can give some of your readers a few good points on annealing and tempering fine tools.

I have occasion to visit the large railroad machine shops and other large shops that use large quantities of fine steel tools, such as taps, fluted reamers, thread cutting dies, milling cutters, etc., and I find that almost all of them lose from ten to fifteen per cent of these expensive tools when they are first tempered, or as soon as they are put into use, and at least twenty-five per cent the second time they are hardened, and about fifty per cent the third time. To avoid this large loss and annoyance, have your steel annealed by the steel manufacturers in short bars from five to six feet long, the sizes you may want, and cut off the required length you may wish for your tools. This will save the forging and consequently much expense, and your tools have not been overheated, and there is no uneven strain on the tool. If your tool is of such a shape that you have to have it forged, do not heat it too quickly, but thoroughly all the way through, and do not hammer nor *bend* the tool unless it is red hot. Do not hammer *cast steel* after the red has all *disappeared* in *any case.* You may hammer blister and shear steel to refine it at a black heat, but never do this *with cast steel*, for it will cause your tool to spring or crack. Forged tools should be annealed and roughed out by planing or turning off below the hammer marks, and then annealed again. This will avoid the springing when hardened. To anneal small sizes of steel, use iron pipes, plug up one end and fill up with the tools. Sift in fine charcoal dust, plug the other end, and heat it slowly until it is at a good red heat all the way through, then bury it in fine charcoal or wood ashes. If you have not got the wood ashes, use dry sawdust, and in a short time you will have the ashes and the most perfect annealing preparation in the world. Have this in a good tight iron box with a close cover. For annealing such tools as taps, reamers, and milling cutter dies, etc., use fine wood ashes, dish out the center and replace the ashes with dry sawdust. Heat your steel slowly to a good blood red, and bury it in the sawdust and cover it over with fine charcoal dust or fine dust from around the forge, put on your cover and let it remain until cold. I always make it a point to get my annealing in on Saturday if I possibly can, and let it remain until Monday or until cold. For hardening I use a good strong salt brine—about three pounds of salt to one pail of soft water, lard oil, and resin, about one-sixth resin to five-sixths of oil. When mixed together, the oil should be quite warm, also the resin. Pour the resin into the oil and stir it well. Heat your tools slowly and thoroughly all the way through, then immerse in the salt brine. If a tap or fluted reamer, put it down in the center of the tub as straight as you possibly can, and move it up and down slowly from one to two inches, so as to avoid a water line, until it is chilled about half way or one-third through, as near as you can judge. This you can determine quite accurately by the tremble of the tongs, caused by the condensing steam around the tool. The tremble will cease when the tool is chilled about half through. Then put the tool from the brine into the oil and resin as quickly as possible, move it up and down gently for a minute or two, then drop it into the oil and let it remain until cold, then take out, brighten, and test the hardness with a small sharp file, and you will find that you have about the right temper required. For cast iron and brass you will require the tool much harder than you will for wrought iron. Large tools after remaining in the oil will sometimes draw the temper a little more than required. If the oil commences to boil by the heat of the large tool, have a pail of boiling hot water close to your oil tub, take your large mill or whatever kind of tool it may be, and immerse in the hot water for eight or ten seconds as near as you can judge, and then return it as quickly as possible back to the oil, and let it remain until the oil stops boiling. We will suppose this to be a large mill cut on top and sides. If you are in a hurry for this tool, and cannot wait until it is quite cold in the oil, you may take it from the oil and put it over a clean slow fire and brighten a few of the teeth, and draw the temper at the same time to suit your work, then return again to the oil and let it remain until cold. It is the safest way to draw the temper on large tools a little on the outside at the same time the temper is drawing from the inside, but there is no occasion to draw the temper on most of your tools from the outside. With this process you will see that the temper is drawn from the inside of tools instead of the outside—the old-fashioned way. By tempering tools in this way, you have a *soft-centered steel.* The brine has hardened the tool so far as it is required to be hard, and the oil keeps it hard and allows the center or thick part to cool slowly. It will not throw your tool out of round, but will run on the centers as true as before it was hardened. Milling cutters, taps, and fluted reamers only require to be hard on the cutting parts, and with this process you have just what you want, and you can anneal and harden them a dozen times and never break them. The teeth will not crack off as they do in the old-fashioned way of hardening tools.

Chipping chisels, after forged, should be heated slowly at least three inches from the cutting edge, to take off the uneven strain caused by forging. Never hammer a cold chisel after the red has disappeared, especially on the edges. The corners will break off if you do. Immerse in clean soft water about two inches, and move the tool up and down slowly, keeping the point in the water at least one and one-half inches, until the water will not hiss on the tool. Then brighten and draw the tool to a sky blue, then drop it into cold lard oil, and let it remain until cold.

If a tap or any other fine tool should by chance get too hot or burnt, do not take the tool from the fire, but shut off the blast. Get some resin, put it on the tool freely, and let it remain in the fire ten or fifteen minutes, occasionally putting on the resin, and letting the tool cool down to a good cherry red, and then immerse as above described, and your tool is as good as if it had not been overheated. I do not recommend overheating steel. It should not be heated more than a cherry red for hardening, and should be heated in a furnace if possible. If you have much tempering to do, it will pay to have one built. A furnace suitable for heating will cost about one hundred and twenty-five dollars.

Oil City, Pa. C. B. HUNT.

Speed of Centrifugal Extractors.

Several instances are on record of the bursting of extractors, and these accidents usually entail not only the destruction of the extractor itself, but also damage to other property and the infliction of serious, sometimes fatal, injuries to persons. A prominent manufacturer of extractors stated to us that investigation into such mishaps has developed the fact that the machines were usually run at an unnecessarily high rate of speed, ranging up to 1,800 and even 2,000 revolutions per minute. In order to ascertain what an advantage, if any, is gained by increasing the extractor's speed, experiments were carefully carried out under the supervision of the gentleman alluded to. Batches of clothes were wet and then placed in an extractor running at a comparatively slow speed, and, when a sufficient time had elapsed, were taken out and weighed. After having been rewet, the clothes were again put through the process at a higher speed and then again weighed. This was repeated at different rates of speed up to 2,000 revolutions per minute. These experiments showed conclusively that nothing was gained by running the extractor at more than 1,500 revolutions per minute. In other words, all the water that can be extracted by centrifugal force is removed by the machine when making 1,500 revolutions per minute.

Any increase of speed over that figure is superfluous. It confers no advantage, does not dry the clothes any more; but, on the contrary, may do an enormous amount of mischief. From the foregoing statement a valuable lesson is to be learned. In order not to endanger life or limb or property, let every laundry proprietor see that the extractor is never run at more than 1,500 revolutions a minute. A small increase of 50 or 100 revolutions may seem unimportant; but it is unnecessary, and there is every reason against making it and none in its favor. In machinery, the old adage of "the last straw breaking the camel's back" is often too true. Once the limit of endurance or resistance is reached, a small *additional* weight or speed is about as bad as a tornado or an earthquake.

Another point that deserves attention is to guard against dropping anything between the perforated basket and the outer shell. About three years ago a horrible accident occurred in the laundry of a hotel, if we remember aright, at Lake Minnetonka, Minn. By the bursting of the extractor several persons were badly hurt, one of them fatally injured. The cause of the disaster was a mystery, and, of course, it was attributed to defective workmanship or inferior materials, and the manufacturer was severely blamed. In a short time, however, the truth leaked out. A girl had allowed a monkey wrench to slip down in the hollow space under the basket, and, being unable to reach it with her arm, had said nothing about it, fearing to receive a scolding for the loss of time that would have been required to take the extractor apart. Two or three weeks passed without the wrench being shaken or washed into the right position to cause a smash, but the time came at last, with the distressing result already mentioned. Therefore it would be only prudent to take all possible care to prevent monkey wrenches, or anything else except water, getting into the chamber.—*National Laundry Journal.*

Croton Water, New York.

The Croton water contains in 1 U. S. gallon of 231 cubic inches the following normal impurities:

GRAINS IN ONE U. S. GALLON.

Soda	0·326
Potassa	0·097
Lime	0·988
Magnesia	0·524
Chlorine	0·243
Sulphuric acid (SO_3)	0 322
Silica	0·621
Carbonic acid	2·604
Organic and volatile matter	0·670
Total	6·395

One hundred million gallons of this water are used daily in New York, in which are contained the following quantities of the above mentioned substances in pounds and in tons of 2,000 pounds:

IMPURITIES IN 100,000,000 GALLONS OF CROTON WATER.

Impurities.	Pounds.	Tons.
Soda	4,657	2·319
Potassa	1,385	0·692
Lime	14,114	7·038
Magnesia	7,485	3·742
Chlorine	3,471	1·735
Sulphuric acid	4,600	2·300
Silica	8,858	4·429
Carbonic acid	37,200	18·600
Organic and volatile matter	9,571	4·785
	91,341	45·640

As the average flow of the Croton River is 400,000,000 gallons daily, there are 365,428 pounds, or nearly 183 tons, of impurities carried to the ocean daily by a stream which does not receive any refuse from factories.

Densities of Liquids.

Many determinations of the densities of the liquids which so short a time back were only known as permanent gases have been made, but until very lately it has been impossible to compare them, on account of the various conditions under which the experiments were made. But very recently Dr. Olszewski, to whose elaborate researches on this subject we are already greatly indebted, has succeeded in overcoming the difficulties of comparison. Taking advantage of the very low temperature produced by the evaporation of liquid ethylene, he succeeded in finding not only the boiling point of the liquefied gases at the normal atmospheric pressure, or very near to it, but also its specific gravity at this pressure. It is of course of particular importance to know the specific gravity at the boiling point, because this fixes the specific volume. Working in this way, Olszewski found for the three important liquids methane, oxygen, and nitrogen the following numbers: Methane: pressure, 736 mm.; boiling point, —164° C.; density, 0·415. Oxygen: pressure, 742·1 mm.; boiling point, —181·4°; density, 1·124. Nitrogen: pressure, 742·1 mm.; boiling point, —194·4°; density, 0·885. Scarcely inferior to the above research in interest is that of M. Amagat on the influence of pressure on the point of maximum density of water. It is well known that this liquid, remarkable in so many respects, occupies a less volume at 4° C. than at higher or lower temperatures. Hence the expansion of water is irregular, and is unlike that of any other liquid. But we now learn that this peculiarity only exists under ordinary pressures. When the pressure is increased, the point of maximum density falls, and at 200 atmospheres it is almost identical with zero; with greater pressure the irregularity of expansion lessens, and at 3,000 atmospheres it disappears and water behaves like any other liquid.—*Lancet.*

© 1887 SCIENTIFIC AMERICAN, INC.

THE ALVAN CLARK ESTABLISHMENT.

The home and workshop of the sons of the world-famous Alvan Clark is situated in Cambridgeport, just in the environs of Boston, Mass. Leaving the city by the Cambridge road, crossing the waters of the Charles River and turning to the left before the University of Harvard appears, the place is soon reached. It is easily recognized by a telescope tube raised on a high pier that towers above the surrounding objects. A piece of ground of about an acre in extent contains the buildings. In front are three dwelling houses, the homes of George B. Clark, of his brother Alvan G., and of the widow of Alvan Clark, the father. The grounds are very prettily kept as a luxuriant lawn with flower beds and paths. In the rear of the residences is a lofty and now disused observatory, the great rusty telescope tube already alluded to, and a low brick building. The latter, as unpretentious as a structure well can be, is the factory. In it the great Pultowa, Washington, and Lick objectives were made. The least imaginative visitor cannot but feel a sense of inspiration as he treads the truly classic spot that has furnished astronomy with its most efficient weapons. The story of the foundation of the business has already been briefly told in the sketch of the life of Alvan Clark.* George B. Clark, when a student, made a reflecting telescope. It was so successful that it was the first inducement that caused him to take up the occupation of telescope making permanently. His brother Alvan G., when sixteen years old, entered a machine shop in order to learn the machinist's trade, intending, ultimately, to join his brother. When twenty-one years old he entered his brother's factory. Up to this period the father had only worked upon lenses in the evenings, painting portraits and miniatures by day. But a few years later he gave up his studio and devoted himself entirely to his favorite occupation. Thirty years ago the factory was removed to its present location. The father is dead. His two sons, including the founder of the establishment, now conduct the work personally. When they abandon it, it is hard to say where a successor can be found.

The demand for large lenses is so slight in this country that the glass disks for their manufacture are generally procured abroad. This is always the case with the large sizes. They may be made in different ways, but one typical method of preparation may be described. A lump of glass of any shape is selected in the glass house, and its specific gravity is determined. If this factor is high enough and the piece appears clear and good, it is melted down into a disk. The lump is placed on a slab of fire clay within a ring and exposed to heat, when it slowly flattens down into the desired shape. This furnishes the blank. If it proves clear and free from striæ, it is ground into shape and polished.

Sometimes the glass plate is delivered in the shape of rectangles. A sheet iron tube, fed with abrading material, is used as an annular saw to cut out suitable disks from such pieces for lenses. The plate is first polished and tested optically with the utmost care for striæ. Small bubbles do little harm, and are contained in some of the best objectives. Such portions of the piece as stand the test are used. Often a lens is cut from the center, while the corners have to be rejected.


The manufacture of the objective properly begins with the circular disk. This possesses approximately parallel sides, which have been more or less completely polished for the purpose of testing. The processes it is subjected to may be divided into cutting and polishing. The former brings it very nearly into shape, with a rough surface. The latter polishes and imparts the last minute corrections.

The cutting is executed by cast iron laps. These rotate in a horizontal plane. They are cast of the general curvature of the lens, but reversed. They are fed with water and with a cast iron sand. The latter is made by flowing air into melted iron. This blast drives out a cloud of minute vesicles of metal, that are chilled instantly by the air. This material is very fine and is rust colored. On treatment with hydrochloric acid, hydrogen is evolved, thus proving the presence of the metal. It is used principally by granite polishers, and has been adopted by the Clarks for their work.


The lens is pressed upon the rapidly rotating lap, being held to one side of the center and slowly moved about to insure regular grinding. Were it held motionless, the part over the center of the lap would not be cut, and a prominence would soon be created there. The iron sand is the only cutting agent. It possesses a great advantage over emery, in not "breaking down." The grains, owing to their metallic nature, are very tough, and possess great cutting power. In this way the faces of the lens are brought to the proper curvature, and the lens is finally shaped in the rough. It has next to be polished.

For this purpose a pitch lap used as below or above the glass is employed. For the smaller class of lenses the pitch lap is rotated precisely as is the metal lap, and is fed with water and rouge. Upon it the lens is pressed and moved about by hand. The pitch contains holes or grooves to prevent suction and sticking. The pitch is slightly or rather slowly yielding. It soon assumes the shape and contour of the lens, and polishes it without altering materially its shape. This operation is reversed for the larger lenses. These are rotated in a horizontal plane while the lap, composed of a metal backing and front of pitch, is moved about over the face. The bed upon which the lens rests consists of its original metal lap. Upon this a piece of Brussels carpet is cemented, and the lens is placed thereon. The illustration shows the machine in operation upon which the Lick lenses, the largest in the world, were polished. The lens resting upon its bed occupies the central position. Upon it rests the pitch-faced lap or polishing tool. A spindle rises from the center of the latter, and on it are journaled two pitmen, working at right angles to each other, and driven by cranks. These impart a double reciprocating motion to the tool. The amplitude, actual and relative, of the two motions can be varied by adjusting the length of the crank arms. One crank is driven at very slow speed by worm gearing. The other crank rotates much faster, as it is driven by tooth gearing. The effect of this is that the tool follows an endless variety of paths, never repeating its course over the face of the lens. The driving gear is seen under the bench, and the face of the pitch-faced lap divided by grooves into squares is also shown. Rouge and water is the polishing agent.

The lens thus shaped and polished has next to be tested. Two methods are used for this work. In one a prism is mounted in a tube attached to a lamp chimney of metal. A flame is maintained within the chimney. This prism is so screened as to furnish a minute source of light reflected outward. The lens to be tested is held in a generally vertical plane. Directly back of it a plane mirror, silvered on its anterior face, is placed. The lamp and prism are so placed that the beam of rays from the prism falls upon the face of the lens, passing through it, and returning again after reflection from the mirror, the prism occupying about the focal position. The eye of the observer is held as near the back of the prism as possible. The lens then appears brightly illuminated, because the eye so nearly coincides in position with the focus. The work is done in a dark room. If the lens is perfect, the field is of uniform brightness, presenting, however, the prismatic colors of the spectrum in broad areas. If the smallest irregularity exists, it appears as a spot or ring or other area upon the glass. To illustrate the sensitiveness of the test, Mr. Alvan G. Clark held his finger for a few seconds upon the face of a nearly perfect lens that was subjected to the writer's inspection by this test. On removing the finger, a strongly defined spot was seen, due to the heat thus imparted to the glass, and several minutes elapsed before it passed away. This was a proof of the extraordinary sensitiveness and perfection of the test. As a further illustration of the effects of atmospheric perturbation, a half dollar which had been held in the hand was laid in front of the lens. With the eye in position a perfect stream of heated air striæ appeared crossing the disk, and resembling in the spectral illumination a cloud of flame. The hand held in front of the glass seemed a source of conflagration, as the same effect on a larger scale was produced. All these changes appeared pictured upon or in front of the face of the lens.

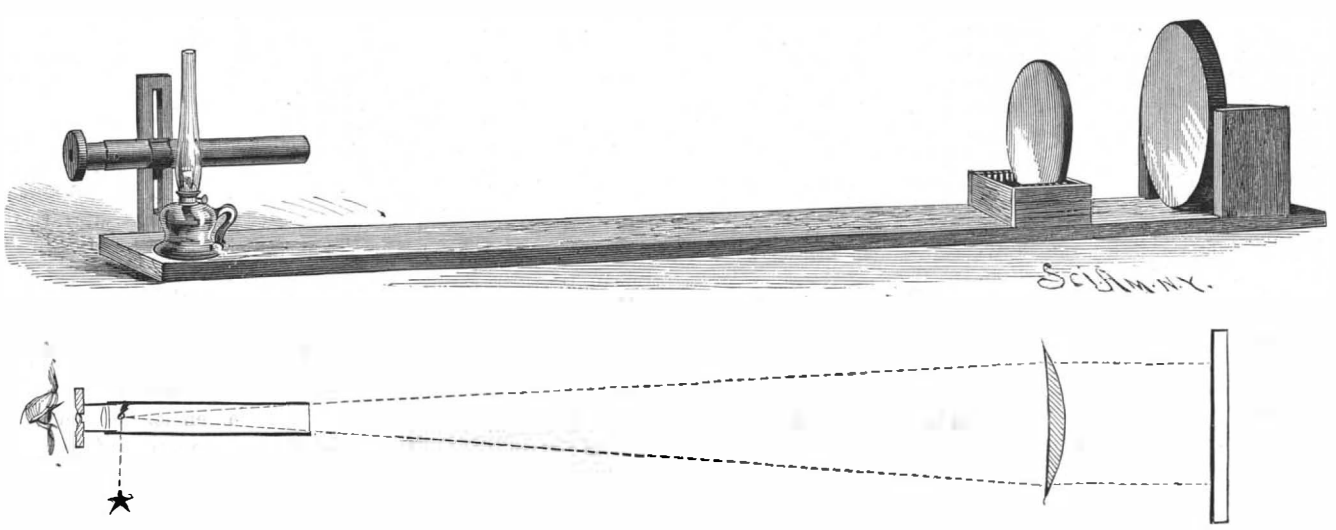

TESTING VISUAL OBJECTIVES.

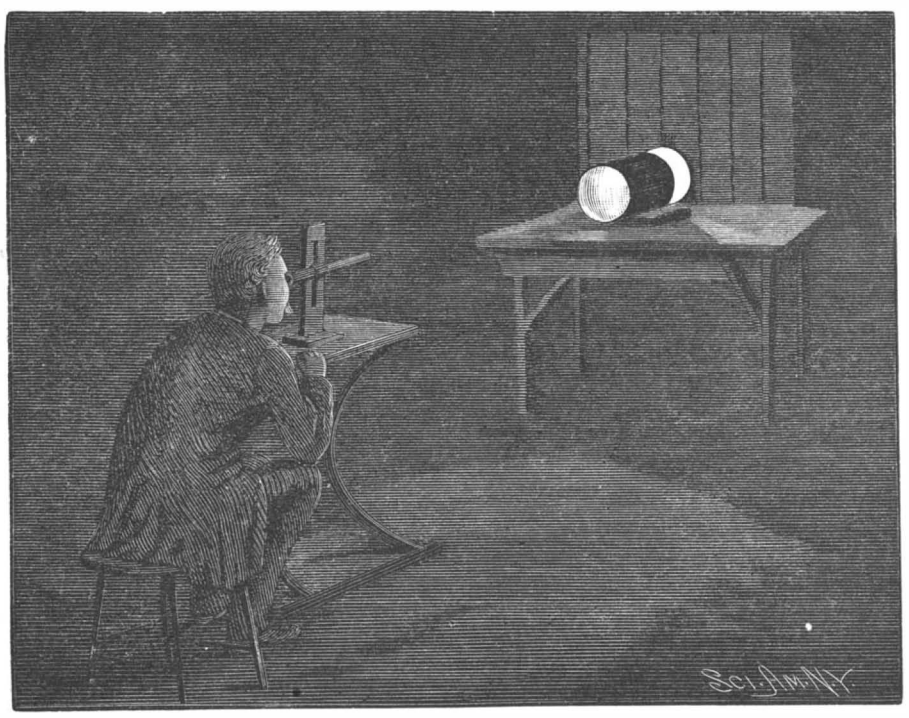

TESTING PHOTOGRAPHIC OBJECTIVES.

In the other method, which is shown in the illustration, the source of light is a minute bead or convex surface of glass, carried in the center of a sighting tube, about six inches long. The light from a lamp is received on this and dispersed. All is arranged otherwise as before. The pencil of light from this source, representing almost a mathematical point, is received and transmitted by the lens as before, is reflected from the mirror and again transmitted. The eye, held a few inches from the back of the reflecting bead, and hence out of focus if the bead is in focus, sees only a small disk of light, about a quarter of an inch in diameter. This image appears, of course, a little to one side of the reflecting bead. If the bead is in the focus of the lens, the spot should appear uniformly illuminated. If the lens is imperfect, the spot will appear unevenly lighted. In general, a dark or light spot appears in the center. By slowly moving the eye, a disk of light can be carried slowly across the field of view, and in this way a still more sensitive effect is obtained.

In these methods the rays of light pass twice through the lens, so that a doubling of the effect due to a misshape is obtained. In the usual methods a star is used as the source of light, so that a single transmission only is had. The Clark process, therefore, is of twice the delicacy of the older methods.

A defect in the mirror might be interpreted as a defect in the lens, but this is very easily provided against by rotating the mirror. If the supposed defect moves with the rotation, it is due to the mirror; otherwise, to the lens.

These are visual tests. For photographic telescope lenses they are not applicable. In these the focusing

* See SCIENTIFIC AMERICAN, vol. 57, No. 10.

© 1887 SCIENTIFIC AMERICAN, INC.

must have reference to the actinic portions of the spectrum, and such objectives can only be tested photographically. Two methods of doing this are in use by the Clark brothers.

In one the spectrum of a bright spot is photographed. A bulb of glass is set up in the sunlight, four or five hundred feet from the station. The lens and tube projects through an aperture in the shutter of a dark room. The ray of sunlight reflected from the bulb passes through the lens and is decomposed by a prism into a spectrum about three-quarters inch long as regards its actinic portion. It is received upon a photographic dry plate. If all the actinic portions are in focus, the spectrum will be photographed as a thin streak of uniform width; but if the lens is not correct, the spectrum will taper off at one end or the other, indicating an erroneous shape.

In the other method a star is photographed. The lens is directed toward Polaris, and a number of exposures at slightly varying adjustments are made upon a dry plate. The exposures are made upon both sides of the focus. If the lens is perfect, the spots produced when the plate is out of focus are of even illumination. If the lens is imperfect, a dark spot can be discerned in the center of some of them. The image of the star when in focus is, of course, a mere point; the unfocused image may be nearly an eighth of an inch in diameter.

Great skill is required in applying the results of these tests, whether visual or photographic. Upon them are based the corrections which impart to the lens its final character of perfection.

The tendency of the inequalities in an objective is to form circles. The location of these is determined by the visual or photographic tests, according to the class of lens under treatment. The lens is removed and placed upon a horizontal stand, whose surface under the lens is ruled in circles. The proper one is selected as the guide, and the operator rubs the protuberant area with his fingers, using, as before, rouge and water. A few minutes or upward may be devoted to this. The lens is next, for a very short time, placed upon or under the pitch lap, and polished, and is then cleaned and retested. The testing requires more time than the rubbing. This process, repeated over and over again, extending, it may be, through many months, gradually brings the lens into shape.

The plane mirror used in the tests needs to be very perfect. They are much harder to grind than lenses, and are made by the Clark brothers for their own use. Such mirrors are also required in some astronomical work. As an illustration of the extraordinary degree of perfection to which their manufacture has been brought, the case of some manufactured for the government by the Clark establishment may be instanced. These were to be used in the observations of the transit of Venus. They were made with the guarantee that they were to be of eight miles radius of curvature as a minimum, and of the lot all exceeded this standard.

Although their objectives are what the reputation of the firm has been built upon, they also make the other portions of telescopes, furnishing them complete with all adjuncts, clock motion, and circles of graduation.

Although the thirty-six inch objective of the Lick telescope would seem a sufficient triumph, the brothers hope to be engaged to construct a still larger objective. They believe that they can make a forty inch objective of as good quality and as perfect as those of the Washington or Lick telescope. The work exercises a sort of fascination or excitement upon the operators, and to hear the story of their work from themselves upon the ground of their achievements is inspiring to the listener.

We also present an interesting group of the three coworkers. In the center, Alvan Clark, the father, appears. On the right of the picture, on his father's left, is George B. Clark, now the senior member of the firm. On the other side Alvan G. Clark is sitting. Two years ago death removed Alvan, the son of Alvan G. Clark, at the early age of fourteen years. With him the male line of the family was extinguished. His portrait, painted by the grandfather, shows strongly the Clark features.

Many of the paintings of Alvan Clark are still preserved in his old home. They include miniatures on ivory and portraits on canvas. They show that the lens maker was a skillful painter, his miniatures being especially beautiful. In the upper story of the factory he had a sort of a studio, where, within a few years of his death, he still handled the palette.



ALVAN G. CLARK. THE LATE ALVAN CLARK. GEORGE B. CLARK.

The Analysis of the Air.

The editor of the *Engineering and Mining Journal* thinks there are few, if any, branches of scientific inquiry that have done so much for the "greatest good of the greatest number" as those which have unfolded and developed the principles of hygiene and sanitation, and taught us that the preservation of good health and the prolongation of life both chiefly depend upon a supply of pure air and pure water. It has over and over again been proved that in such crowded cities as our own the most malignant forms of infection are chiefly propagated by spores or germs floating in the air, or carried into our drinking water by the infiltration of sewage matter; and although a great deal of attention has undoubtedly been devoted to the analysis of both these elements, there is still a great deal of room for the simplification of processes and the popularization of easy and reliable methods of investigation. Our first knowledge of the air and its composition was in a very large measure due to the labors of Dumas and Boussingault, but it has been greatly amplified of recent years, and we now know that the dust or minute particles of solid matter which are constantly suspended in space by the action of the currents contain various germs which disseminate disease, and an immense variety of minute seeds, which, when deposited in certain liquid or moist substances, immediately germinate and induce mould. mildew, and fermentation. From the standpoint of hygiene it is extremely difficult to determine whether it is more desirable to have a thorough knowledge of the air we take into our lungs or of the water we drink, each being so important; and the only reason why the latter has hitherto received a greater share of attention is probably to be found in the fact that its analysis is much less tiresome, comparatively devoid of complications, and therefore more easily comprehensible to the ordinary mind than that of the former. The recently published and highly interesting results that have lately been obtained in England by a group of experimenters promise to create a revolution in this state of affairs by drawing more attention to air analysis, and it will be interesting to briefly glance at the newly suggested method by which to arrive at an accurate determination of the various atmospheric constituents.

The test for carbonic acid consists in placing several two gallon glass bottles side by side and filling them with air, withdrawn from different parts of the room by means of India rubber tubing. Into each bottle is then poured a small quantity of weak baryta water, which, acting upon the carbonic acid, gives rise to a dense white precipitate of barium carbonate, easily separated by filtration, and weighed.

The germ test is made by means of a glass tube, some two feet long by three inches in diameter, lined inside with a coating of transparent gelatine. A certain quantity of air is made to pass through the tube, and the germs deposit themselves upon the gelatine, where they can live and multiply, and where they may be distinguished and identified under the microscope.

For the detection of organic matter, six large glass bottles are filled with distilled water, and are connected with each other by glass tubes. The air, made to pass through the whole series in a continuous stream by means of an aspirator, communicates to the liquid all the organic impurities with which it was charged, and, without visibly affecting its color, causes it to acquire a disagreeable smell. The *ensemble* of this simple process recommends and entitles it to the serious consideration of all those who are intrusted with the care of the public health, and we should be glad to see all public buildings and apartments in which large bodies of persons daily congregate for business or for pleasure provided with the necessary and inexpensive apparatus. It might be presided over by some intelligent person (not necessarily a scientist), its frequent use would insure the immediate detection of noxious elements, and we might thus constantly maintain or restore pure air by applying such preventive or remedial agents as are well known and always at hand.

Newspaper Advertisements.

An advertisement of the present day, as a rule, is a model of clearness, precision, and compactness.

In fact, quite a degree of pleasure can be derived from the perusal of it, aside from the important information which it oftentimes conveys.

In ingenuity the modern advertisement is remarkable; in fact, it is frequently a work of art, both in a literary and typographical sense. The aim of some advertisers in many cases seems to be to draw the attention of the reader away from the fact that it is an advertisement. While not taking rank among what may be termed literary productions, it possesses many of their brightest features. In the hands of a master workman, be he advertiser, writer, or compositor, the matter becomes attractive to the most casual reader. The latter's attention is drawn toward it, and his interest in it aroused before he is fully aware of the fact. The old style of merely puffing one's merchandise has passed out of date. The reading and purchasing public of today demand something stronger and better. That this want is recognized and appreciated by the keen advertiser and equally alert public is apparent to almost every one. The fact is, advertising has become such an integral part of modern business methods that it is almost impossible to carry on any kind of trade or traffic without its aid. It is well known that many concerns pay large salaries to skilled writers whose only employment is the invention and the framing of attractive and telling advertisements.

Thousands of dollars are annually expended simply in putting the matter in shape, and many millions more for its publication in the press. The firm who can express in clear, strong, and concise language, set in attractive form of display, just what it has to offer, at once attracts the merchant as well as the consumer.

No merchant can now wholly depend for business upon the fact of his being well known to the trade. No matter how many years he may have been established, or how familiar his name is to the purchasing public, or how celebrated his wares are; if he does not advertise and keep doing so in some way, buyers and consumers will in time ignore him and visit and trade with his competitor who sounds his trumpet upon all occasions to the extent of thousands of dollars a year, and pays the same without murmur because it pays him to do so.—*Dry Goods Review.*

Magnesium Light for Photographic Purposes.

It is proposed that the magnesium be mixed in the state of fine powder with an oxidizing agent, such as a chlorate or nitrate, and a substance such as amorphous phosphorus, which would accelerate combustion. The mixtures suggested as most suitable are—12 parts of chlorate of potash, 6 parts of magnesium powder, and 1 part of prussiate of potash or 24 parts of chlorate of potash, 12 parts of magnesium powder, and 1 part of amorphous phosphorus. The light may be colored by the addition of salts of suitable metals to the above mixtures. The powder burns with a flash, lasting only from $\frac{1}{50}$ to $\frac{1}{50}$ of a second, and yields a more intense light than when wire or ribbon is used; and the shortness of its duration removes the difficulty hitherto experienced of getting the proper "exposure" with the magnesium light.—*By J. Gaedicke, Berlin, and A. Miethe, Potsdam, Germany.*

FURTHER information desired as to the elevated railway gate described in our last issue will be furnished by Mr. G. Civolari, Temple Court, room 107, No. 7 Beekman Street, New York City.

© 1887 SCIENTIFIC AMERICAN, INC.

Poisonous Bakery Adulterations.

Concerning the use of poisonous adulterants in bakeries, the Philadelphia *Record* says:

Notwithstanding all that has been published relative to the poisonous character of chrome yellow as a coloring matter for buns, cakes, and pastry, President Amerling, of the Society for the Prevention of the Adulteration of Food, states that a large number of bakers are still using the stuff. Recently he visited five bakeries, each of which does a large business, and in every case chrome yellow was found in use. The proprietor of one of these, a prominent up-town baker, was exceedingly indignant at the appearance of President Amerling, and stoutly denied using the poison. "Well, what do you use?" asked the president. "Why, canary yellow, and that's not poison. I'm not afraid to eat it myself."

The matter, when shown, proved to be nothing else than chrome yellow. The baker was cautioned not to use it again under pain of prosecution. He had been reported to the society by a gentleman who stated in a letter that his own family and a number of neighbors had been made sick by eating buns purchased at his bakery. Letters are beginning to pour into the office of the society at No. 142 South Sixth Street, giving information as to bakeries that are using the poison, and President Amerling is accumulating a mass of evidence against offending parties. The aim of the society, however, is to improve and educate, not to prosecute, and the evidence will only be used against those who, after being warned, continue to use the poison. It is estimated by the coroner that fully 50 per cent of the bakeries in Philadelphia have been constantly using chrome yellow.

The following circular has been sent out by the Society for the Prevention of Adulteration of Food to the bakers and confectioners:

You are hereby notified that the enumerated colors herein are poisonous, and if you persist in the use of any of them after receipt of this notice, you will be prosecuted to the full extent of the present law:

COMMON AND POISONOUS COLORS.

Common Name.	Chemical Name.
YELLOW.	
King's yellow	Sulphide of arsenic.
Cadmium yellow	Sulphide of cadmium.
Turner's yellow	Oxychloride of lead.
Turpeth mineral	Basic sulphate of mercury.
Chrome yellow	Chromate of lead.
Chrome zinc	Chromate of zinc.
Citron yellow	Chromate of barium. Chromate of strontia.
Naples yellow	Oxides of lead and of antimony.
Yellow ocher	Clay and hydrated ferric oxide.
Mosaic gold	Sulphide of tin.
RED.	
Minium	Oxide of lead.
Vermilion	Sulphide of mercury.
Purple red	Basic chromate of mercury.
Iodine scarlet	Mercuric oxide.
Realgar	Sulphide of arsenic.
Red ocher, Colcothar	Ferric oxide.
GREEN.	
Chrome green	Chrome oxide.
Cobalt green (Rimmam)	Oxides of cobalt and of zinc.
Mountain green	Malachite green.
Scheele's green	Arsenite of copper.
Verdigris	Basic acetate of copper.
Emerald green	Acetate of arsenite of copper.
BLUE.	
Ultramarine	Silicate of alumina and soda with sulphide of sodium.
Mountain blue	Malachite blue.
Smalts	Silicate of cobalt and potassium.
Antwerp blue, Insoluble Prussian blue	Ferric ferrocyanide.
Soluble Prussian blue	Ferro potassic ferrocyanide.
Indigo	
BROWN.	
Manganese brown	Binoxide of manganese.
Vandyke brown	Ferric oxide.
Burned sienna, Burned umber	Clay colored with oxide of iron and manganese.
ORANGE.	
Chrome orange	Basic chromate of lead.

Odor of Arc Lights.

Complaint was recently made by the correspondent of a Rochester, N. Y., paper as to the bad odor of the electric lights on the streets. Mr. Redman, the manager of the Brush Company, endeavored to correct certain curious misconceptions on the subject, and said:

"The bad odor at this time of the year does not come from the electric fluid nor from the burning of the carbons. The explanation is very simple, and would be manifest to this correspondent if he had ever been present at the cleaning of a lamp after a warm night. The light attracts innumerable insects that kill themselves in contact with the lamp and collect there by the pintful. The mass of decaying animal matter gives out the offensive odor that the correspondent complained of. I do not wonder at his complaint, for the stench is particularly offensive. In certain situations we are obliged to protect the lamps with wire gauze to prevent the winged creatures from flying against them and interfering with the light. Ever since the introduction of electric lights here, the workmen at the various works have been wondering at the strange and varied visitants that come into the rooms at night. Our works at the lower falls are particularly well situated to attract all sorts of creatures that fly by night, and we have a very miscellaneous collection pinned on the walls, after the fashion of regular entomologists. The boys have had some monster moths come in at night, and all the specimens were duly pinned to the wall. It might interest a collector to call and examine our cabinet. Most of those we have seem to fly altogether by night, for they are of a kind that I never see by day. In former years we frequently caught a large green butterfly, but I have not seen one of them this year. Perhaps their season for skirmishing by night does not arrive until later in the year.

The Chinese Fan Palm (Livistona sinensis), and its Uses.

In the report of the superintendent of the Botanical and Afforestation Department of Hong Kong for 1886, the following interesting facts are given on the cultivation of the Chinese Fan palm (*Livistona sinensis*, Mart.) for the manufacture of fans.

The Rev. B. C. Henry, who has traveled much in the Kivangtung province, says in his book "Ling Nam" that the palm district extends about twenty miles from east to west and ten miles from north to south. It appears that fan palm cultivation is confined to the San Ui district. In reference to this, Mr. Henry says: "That the limitation of this industry is a matter of necessity and not of choice is proved by attempts made at various times to cultivate the palm in other places, attempts that have always resulted in failure."

Judging from the appearance of the country in traveling through the delta, the reputed failure of the palm when its cultivation has been attempted in other places than the San Ui district could scarcely be attributed to soil, as everywhere this had much the same appearance of richness and constituency. Knowing the immense influence which winds have on the growth and success of not only delicate plants, but also on the hardiest of trees, it is possible that the uninterrupted sweep of certain winds over the flat land of the delta, combined with some other minor uncongenial circumstances, may be the cause of the failure of the palm for commercial purposes. The San Ui district is protected by lofty hills to the north and westward, which possibly afford the conditions of shelter that the palm requires for the development of perfect leaves suitable for the manufacture of fans.

The palm plantations are situated on flat alluvial lands, about six to ten feet above the water of the rivers and creeks which run through the delta, and they are intersected with numerous open canals or ditches four feet wide or more, for carrying off the surplus water in the rainy season, and for retaining it, by means of wooden sluices fixed on the banks which surround the plantations or fields for purposes of irrigation.

The land is not wholly given up to palm cultivation, but other crops, as bananas, plantains, papays, oranges, peaches, ginger, betel-pepper plant, and various vegetables occupy shares of the ground.

The cultivation of the palm, and the manufacture of fans from its leaves, is a most important industry. According to Mr. Henry, the manufacture of the fans after the leaves have been cut gives employment to about one hundred firms and from ten to twenty thousand people. When the plantations are made, the young seedlings are placed at various distances apart, in order that different kinds of leaves, which are produced from plants growing at close and wider distances asunder, may be obtained for the manufacture of fans, for which thick or thin or large or small leaves are required.

"The most perfect plantation which I saw was about half a mile in length and about a quarter of a mile in width. It was drained by means of open canals as above described. The main body of plants were in perfectly straight rows, and they were exactly four feet four inches apart; the stems were from two feet to four feet high, and they bore about six fully developed and perfect leaves, the pellicles (stems) of which were five feet long, and the blade or leaf itself three feet long. Next to and surrounding the main body of palms, about one hundred feet wide of smaller palms, which were growing at only two feet from each other. The stems were but one foot high, they bore the same number of leaves (six) as the other plants, but, unlike them, half the number of leaves were bad. The leaves and their stems were each one foot shorter than those on the larger plants, and the pellicles were much more slender. Outside of this belt, and on the extreme margin of the plantation, there was a second belt, which, however, was very narrow. It consisted of only three rows of palms, the plants being very close together, only one foot four inches apart. None of the leaves on this belt appeared good enough for fan manufacture.

The inner belt of plants was intended, by reason of thicker planting, to serve as a screen to protect the main plantation from the damaging effects of winds, while at the same time it affords finer leaves for smaller fans. The marginal and closely planted belt was placed on the river bank to serve as a fence to keep intruders out of the plantation. For this purpose the palm, while in a young state, and when planted together, is well adapted; the spines on the pellicles presenting a barrier sufficiently offensive to the bare, stockingless, and shoeless legs and feet of the Chinese coolie. The long, straight vistas, the regularity of the planting, and the canopy of the verdant leaves overhead, produce on the visitor a delightful impression which is worth traveling some distance to experience.

Other plantations contained palms of all ages. Some had trees upward of a hundred years old, according to the assertions of natives, but these plantations always contained trees of mixed ages, young plants having been constantly added to take the place of older ones as they died out or were blown down by winds. The old trees were always of a very stunted appearance—a condition which would naturally ensue from the continued lopping of their leaves. A parasitical fungus or lichen covered these old trunks, and gave them the appearance of having been whitewashed. The tallest trees seen were only about twelve feet high, but they were said to be upward of a hundred years old. The leaves on these old trees are larger and stouter than those on young plants, and the stems of the leaves are only about a foot long. The palm begins to yield leaves suitable for fans when it is about six years old. The first cutting of leaves takes place early in the year, and the leaves which are somewhat damaged by the winterly winds, and consequently of inferior quality, are used for thatch in the construction of the "matsheds" which are so extensively used for temporary purposes in China.

Leaves for fan making are obtained in April, one, two, or three leaves being taken from each plant, and the process is continued each month until November, when, I was informed, cutting is discontinued for a few months. The leaves are taken from the plantations to a clear space covered with short grass turf. Here each leaf has a thin piece of bamboo placed across the blade where it is joined on the stem. Each end of the bamboo is secured in its place by the loose end of a segment of the leaf being dexterously bound round it. The bamboo prevents the leaf curling up while it is drying. The leaves are then laid out singly on the turf to dry in the sun, and collected and stacked at night. The process is continued daily until the leaves are quite dry, when they are either sent off direct to the town to be made into fans or they are stacked for a time until the manufacturers are ready to receive them."

The manufacture of the fans is carried on chiefly in the town of San Ui, but there are also some establishments in the country where this is done. The dried leaves are subjected to a process of blanching by means of sulphur. They are then straightened and rendered shapely by being held and manipulated over a charcoal fire. The operator, as he finishes the fans, places them one by one on each other, making a heap on the floor; the heap is firmly pressed down by the weight of the operator, who stands on a board placed on top of the heap while he is working at succeeding fans. When a heap of twenty or thirty fans have been thus treated, they are removed, and another series is begun. The next process is sewing on the bindings at the edge of the fans. This is done by women and children, chiefly at their own homes, and the fans returned, when finished, to the manufacturer. The more expensive fitting of horn and bamboo handles is done at Canton. The portion of the stalk which is not required as a handle for the fan is not wasted; it is composed of fibrous material that is utilized in making short lengths of rope used as slings to suspend baskets from carrying poles. Around the stem, as bases of the leaf stalks, there is a quantity of fibrous substance, somewhat resembling coir fiber. This is carefully collected, and also used for making ropes.

Counterfeit Jewels.


Artificial precious stones have become an important article of trade. The products of some of the shops would almost deceive an expert, but the test of hardness is still infallible. The beautiful "French paste," from which imitation diamonds are made, is a kind of glass with a mixture of oxide of lead. The more of the latter the brighter the stone, but also the softer, and this is a serious defect. The imitation stones are now so perfectly made, and are so satisfactory to those who are not very particular, that their influence begins to be felt in the market for real stones. By careful selection of the ingredients, and skill and manipulation, the luster, color, fire, and water of the choicest stones are to the eyes of the layman fully reproduced. There are a few delicacies of color that cannot be perfectly given, for they depend on some undiscoverable peculiarities of molecular arrangement, and not on chemical composition; but the persons who buy the stones know nothing of that. Yet Sidot, a French chemist, has nearly reproduced these peculiarities, including the dichroism of the sapphire, with a composition of which the base is phosphate of lime. Two other French chemists, Fremy and Fell, have produced rubies and sapphires having the same composition with the genuine stones and nearly equal hardness.—*Popular Science Monthly.*

© 1887 SCIENTIFIC AMERICAN, INC.

TRIPLE EXPANSION ENGINES.

We illustrate below a set of triple expansion marine engines, constructed by Messrs. R. & W. Hawthorn, Leslie & Co., Limited, Newcastle-on-Tyne, and which are now being shown by that firm at the Newcastle Exhibition. These engines, says *Industries*, are of the inverted cylinder direct-acting surface-condensing type usually designed by this well known firm for use in torpedo cruisers, and they certainly appear to combine the maximum of power with a minimum of weight. The cylinders are in size respectively 20 in., 27 in., and 42 in. diameter, the stroke being 18 in. The i. h. p. averages as much as 1,800 with a boiler pressure of 160 lb. per square inch. In proportion, general design, and workmanship, these engines appear to be all that could be desired. Lightness of weight, combined with strength of material, and easy access to every part—such are the leading characteristics of this excellent specimen of marine engineering; and visitors who take an interest in following out the latest developments of this branch of industry will find it well worth their while to spend some time in examining the details of this exhibit.

In its immediate neighborhood is also shown, by the same firm, a model of the triple expansion engines designed by them, and now being constructed by the Societa Hawthorn-Guppy, of Naples, for the royal Italian twin-screw ironclad Sardegna. These engines will be capable of developing the enormous aggregate power of 25,000 horses, and will be by far the largest hitherto erected in any vessel. Each propeller on the Sardegna will be driven by two sets of engines coupled in line, as shown in the model, and for ordinary cruising purposes, when a low power only is required, the forward engines may be disconnected and the aft engines alone used to propel the vessel.

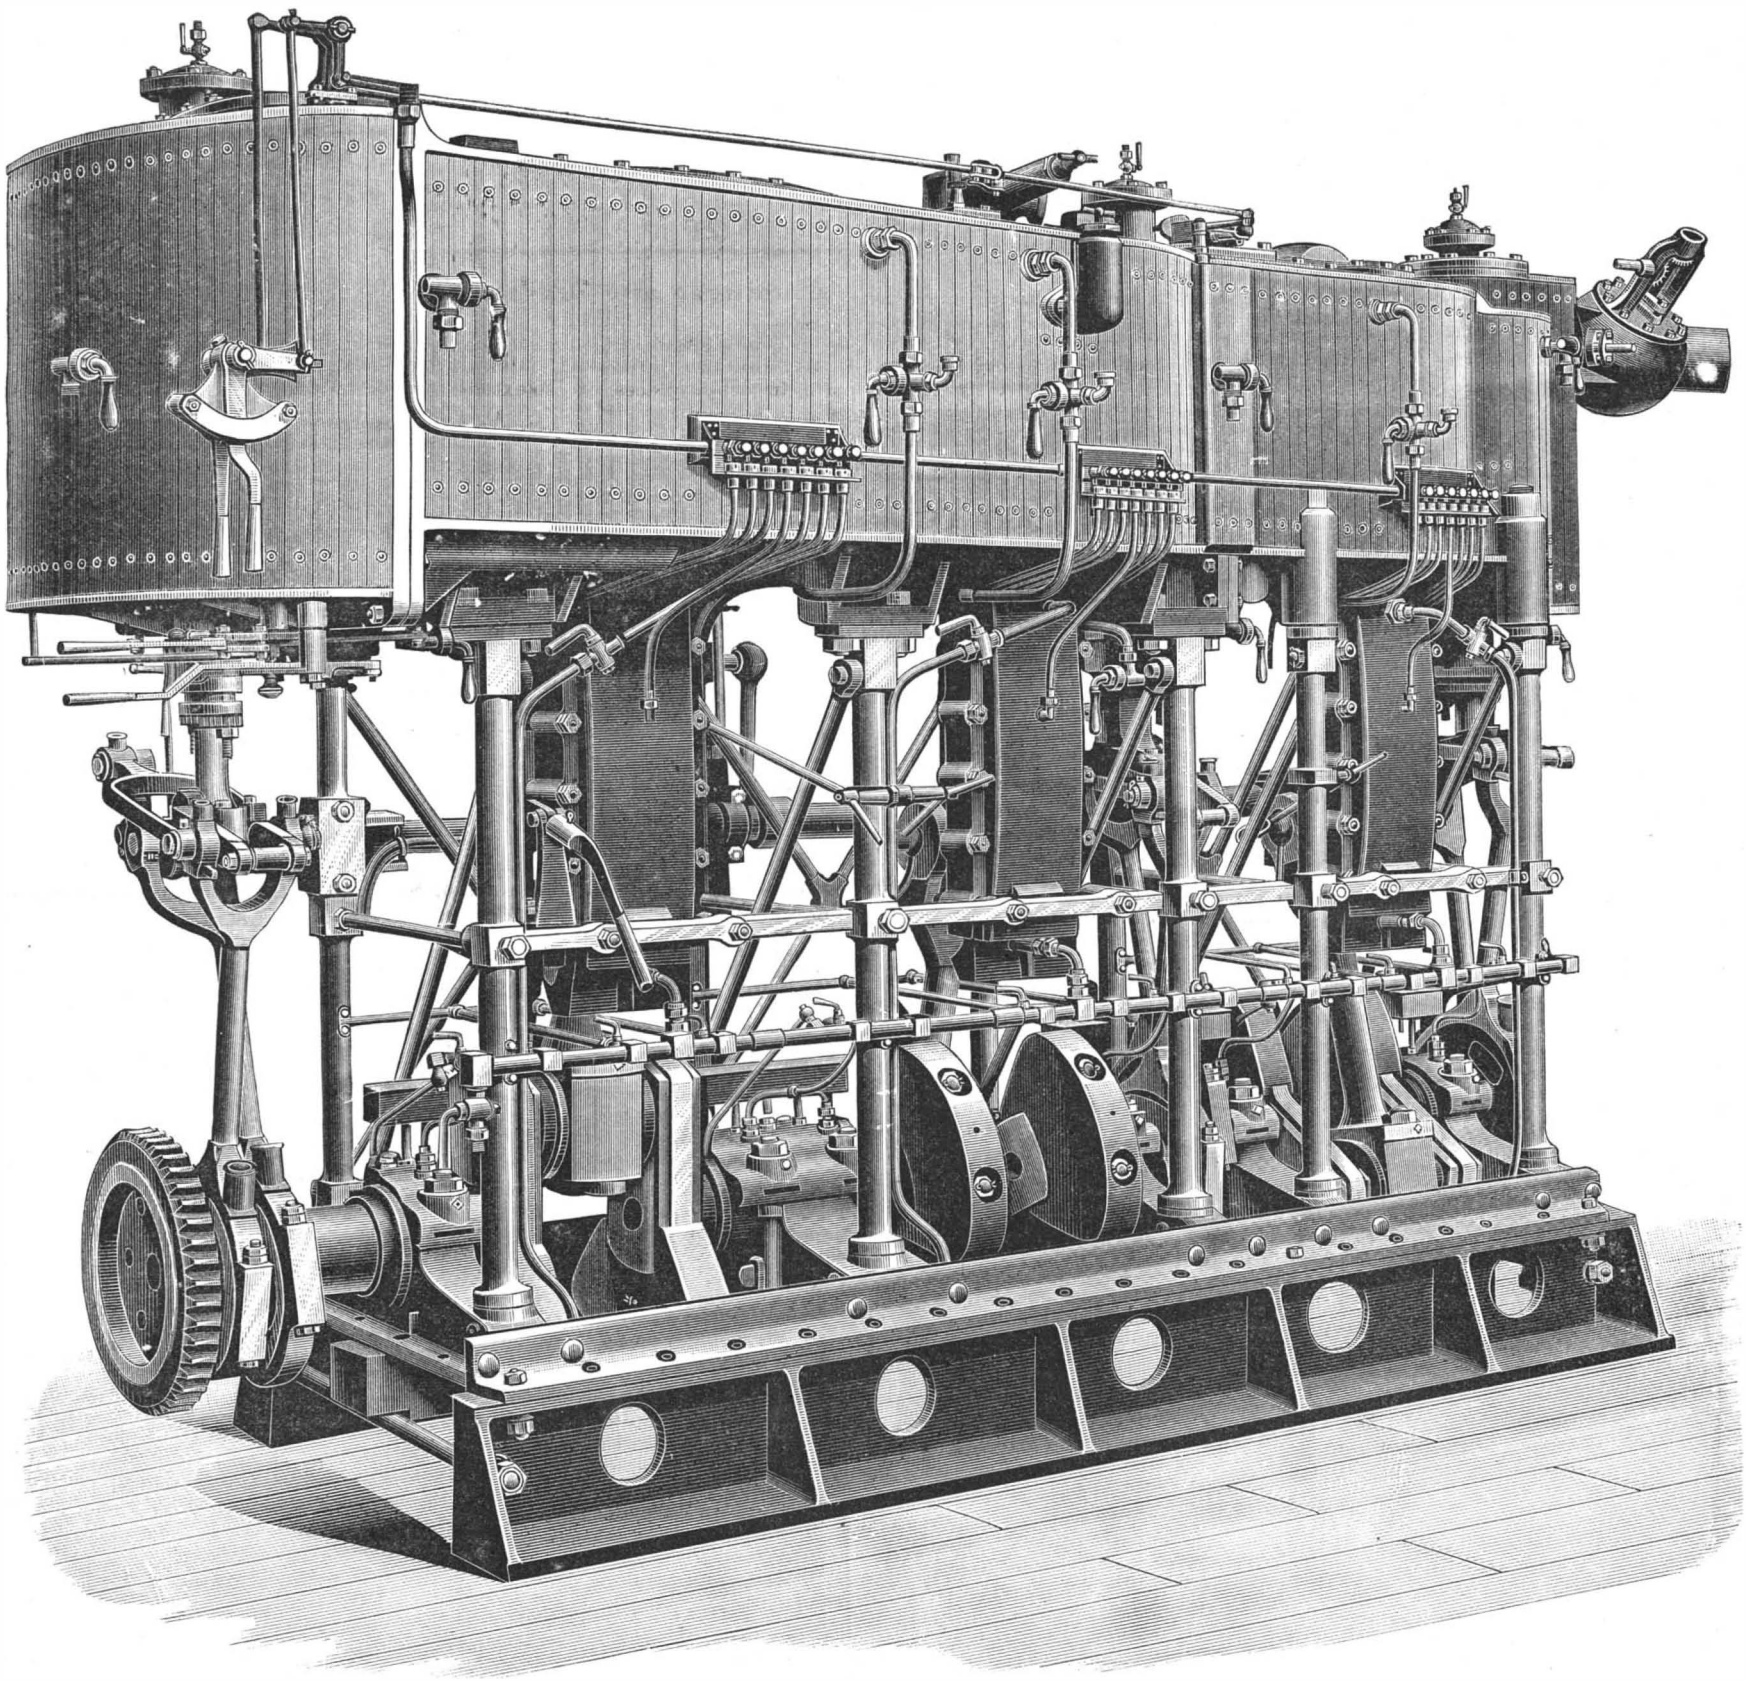

IMPROVED TRIPLE EXPANSION MARINE ENGINES.

Coloring Copper and Nickel.

The following process is given in the *Journal des Appl. Electriques*, by which it is claimed eleven different tints can be produced upon copper and eight upon nickel. The articles are thoroughly cleaned and polished, and placed in the following solution:

Acetate of lead	31 grains.
Hyposulphite of soda	93 "
Water	1 quart.

The bath must be heated nearly to the boiling point before the copper or nickel articles are placed in it, when a grayish tint is first produced, which changes successively to violet, chestnut brown, red, and blue, including the intermediate shades. When any desired color is obtained, the articles are withdrawn from the bath, washed, dried, and varnished. This process is especially adapted to the coloring of buttons or similar small metallic articles.

Boracic Acid for Hides.

An improved process of treating hides or skins is employed by Mr. Joseph Townsend, of Glasgow. A compound or mixture is made of aluminate of soda or aluminate of potash, containing by preference 50 per cent of soda or an equivalent quantity of potash and 40 per cent of alumina and one gallon of water to each pound of aluminate. The skins are steeped in this mixture or are impregnated with it in any suitable manner; and after a few days of this treatment the hair can be removed. The skins, having by preference been washed with water, are next placed in a solution containing from 2 to 4 per cent of boracic acid, and are again by preference washed with water. The skins may afterward be tanned in the ordinary way or may be otherwise treated.

The treatment with boracic acid may also be used with skins that have been treated with lime. The boracic acid will remove the excess of lime and render the skins more suitable for the tanning process, while the boracic acid absorbed by the skins at this stage will tend to prevent the decomposition of the tanning material when it is afterward applied. The soluble borate of lime contained in the washings may be mixed with the tanning material, as it will also tend to preserve that material from decomposition. Instead of treating the skins with boracic acid alone after they have been treated with aluminate of soda or aluminate of potash or with lime, they may be treated with a solution containing boracic acid and sulphate of alumina or other soluble salt of alumina. And instead of first treating the skins with aluminate of soda or aluminate of potash, or after so treating them, silicate of soda or silicate of potash may be used, of a strength of about 18 degrees Twaddell. When using an aluminate and a silicate, however, it is preferable to steep the skins for some time in the silicate alone, and after draining, to steep them in the aluminate, then to wash in water, and after removing the hair to steep in the solution containing boracic acid and a salt of alumina.

A New Boiling Well.

A roaring well has been discovered near Harlem, Columbia County, Ga., about thirty miles from Augusta. A noise can be distinctly heard down in the well resembling the sound of a swarm of bees, and a glance down plainly shows that it is boiling furiously. A lighted torch was let down in the well to see if it contained gas, but without result. This well was dug about one year ago, and has been acting like other wells until about three weeks ago, when it began to boil, and has continued to boil incessantly ever since.

© 1887 SCIENTIFIC AMERICAN, INC.

ENGINEERING INVENTIONS.

A locomotive engine has been patented by Mr. William J. Tripp, of New York City. It is constructed with large drivers, for high speed, and with the preponderance of weight below the main axle and near the track, in connection with various novel combinations of detail and arrangement of parts.

A railroad crossing gate has been patented by Messrs. Nicholas Thelen, of Schenectady, and Henry Cluever, of Albany, N. Y. This invention provides a novel construction and combination of parts for gates upon each side of a track, which may be readily raised and lowered simultaneously by one person.

A grip for cables has been patented by Mr. Patrick Kelly, of Poughkeepsie, N. Y. It consists of a fixed and a movable jaw, the latter with an eccentric clamping arm, and the latter rigidly connected to a guide arm, with a hook adapted to fit over the cable and hold the jaws in lines parallel with the general line of the cable, the device being especially applicable for tightening derrick cables or guys.

A rotary engine has been patented by Messrs. Louis A. Perrot and Harry W. Warrington, of Richmond, Va. A wheel with buckets and central shaft is fitted in a cylinder, an extension being formed on the cylinder with channels leading in opposite directions to the buckets, while a valve is held in the extension provided with a steam inlet opening and an exhaust opening connecting with the channels.

A car coupling has been patented by Mr. Charles W. Chisholm, of Winnipeg, Manitoba, Canada. It is an automatic coupling f that class wherein a pivoted pin, hook, or dog is employed to engage the coupling link and hold it in position within the drawhead, and it may be set to allow for the uncoupling of the cars, and, when the link is withdrawn from the drawhead, the coupling hook or dog will be returned to a position for automatic coupling.

AGRICULTURAL INVENTION.

A combined cultivator and pulverizer has been patented by Mr. Joseph Ashenfelter, of Liberty, Neb. It has two connected runners, each carrying an outwardly extending platform crusher, and sets of disks held at an angle to the runners at their rear, adapted for cutting the weeds and hilling rows of listed corn with earth.

MISCELLANEOUS INVENTIONS.

A band for paper, currency, etc., has been patented by Mr. Oscar S. Matthews, of Dallas, Texas. The band is of paper or like material, with a stiffened back and flexible flaps, on which are secured clips of sheet metal with clamping ends and a tongue, for use in connection with an elastic band.

A book holder has been patented by Mr. William Simmonds, of Yonkers, N. Y. It consists principally of a spring clamp adapted to span the back of the book and grasp the leaves upon either side of the back and hold them firmly upon the covers in convenient position for reading or copying.

A pocket rule has been patented by Mr. Edward R. Billings, of New York City. It is provided with a pivoted plate connecting two sections of the rule, whereby it may be used as a protractor of angles, the invention consisting of the special construction of the rule and the connections of the sliding end of the pivoted plate with the rule.

A rein guide has been patented by Mr. Noah D. Noble, of Carroll, Iowa. It has two arms pivoted to a staple for connecting the rein to the harness, in combination with a roller held at the free ends of the arms, and a fastening device, the object being to reduce the friction of the rein in the guide to the minimum.

A metallic printing block has been patented by Mr. John M. Hawkes, of New York City. It is of novel form and construction, and provided with fixed and movable clamps, whereby electrotype and stereotype plates can be firmly locked in position or released at will, the invention being an improvement on a former patented invention of the same inventor.

A berry box has been patented by Mr. William Henry Moser, of East Portland, Oregon. It is a box made of veneer, made without the use of tacks, having a flap or tongue lock for adjacent ends shaped in a novel form, and in such way that the shaping, cutting, and scoring of the blank may all be done by machine at one operation.

A dry goods exhibitor has been patented by Mr. Andrew J. Nichols, of Ozark, Ark. It consists of a case in which are arranged guide rollers and carrier rollers, so that goods on adjacent rollers will not interfere with each other, and the goods on the several carrier rollers may be fully displayed, and can be readily drawn out for cutting, measuring, etc.

A medicine case or satchel has been patented by Mr. David L. De Myers, of Pierce Station, Tenn. The invention consists principally of a bag or satchel having a central support to which holding devices or clasps are attached for holding bottles, etc., in connection with a special construction of satchel, especially fitted for the use of physicians, surgeons, etc.

A shade exhibitor has been patented by Mr. Robert K. Slaughter, of Brooklyn, N. Y. It is a double-faced revoluble cabinet with swinging frames, either one or both of which may be swung outward, to be placed in a convenient position on the floor of an apartment, and so arranged that either line of shades may be readily exhibited and returned within the case.

A straw rope machine has been patented by Messrs. Cyrus Stephens and Charles A. Carter, of Lewis Creek, Ind. It is for making straw ropes for grain-binding harvesters, the feed being designed so that one or two straws will be fed to the rollers of the machine so as to add them to the rope every two or three inches, to form ropes rapidly of nearly uniform size.

A step ladder has been patented by Mr. William R. Allan, of Pittston, Pa. The supporting legs can be swung toward and from each other, in addition to having a hinged connection with the ladder, thus making a wider support in proportion to the width of the ladder than is possible with rigid supporting legs, and the ladder can be folded to occupy but little space.

A washing machine has been patented by Mr. Henry Bauerfeind, of Shawano, Wis. It has a drum with parallel straight ribs journaled in a tub, vertically grooved plates on opposite sides of the tub, and a rocking frame with parallel rollers journaled in its sides, the washing being done by an alternate backward and forward passing of the clothes between the drum and the rollers by operating a crank.

An apparatus for producing malleable iron or steel direct from the ores has been patented by Mr. Christian Husgafvel, of Picksamaki, Finland. The invention covers a novel construction and combination of parts for a system of charging the ore with less coal and reducing the working temperature of the furnace, to thus furnish a completed product without the ordinary intermediate processes.

A method of constructing wagon seats has been patented by Mr. John Q. Flint, of Wilton, N. H. It consists in securing the back piece to a suitable form, bending the parts of the rail over the form and along the edge of the back piece, clamping or otherwise securing the rail to the edge of the back piece, and finally removing the back piece and rail together from the form.

An automatic grain-weighing machine has been patented by Messrs. Valentin Weber and James R. Harrison, of Princeville, Ill. The invention covers a novel construction and arrangement of various parts and details of an improved machine for automatically weighing grain as it is received from the thrashing machine, in connection with a device for registering the quantities weighed.

SCIENTIFIC AMERICAN BUILDING EDITION.

SEPTEMBER NUMBER.

TABLE OF CONTENTS.

1. Elegant Plate in Colors of a Twelve Hundred Dollar Cottage, with floor plans, specifications, sheet of details, bills of estimate, etc.
2. Plate in Colors, with specifications, estimate, and bill of materials, for a Southern Residence of moderate cost. An elegant design.
3. Handsome design for a Library Building.
4. Perspective view, with floor plans, for a Dwelling costing Five Thousand Dollars.
5. Drawing in perspective, with floor plans, for a Cottage costing Thirty-five Hundred Dollars.
6. Floor plans and perspective for a Country Store costing Two Thousand Dollars.
7. Perspective view and floor plans for a Residence costing Four Thousand Dollars.
8. A handsome Dwelling costing Four Thousand Two Hundred Dollars. Perspective and floor plans.
9. Perspective and floor plans for an Eighteen Hundred Dollar Cottage.
10. Perspective view and floor plans of Grace Memorial House, Providence, R. I., a School House, and Nursery. Cost, Four Thousand Dollars.
11. Suggestions in Decorative Art.
12. Sketch for a Seashore or Beach Dwelling.
13. Illustrations of Tenement Houses of moderate cost at Kansas City, Mo.
14. Examples of Suburban Houses at Hamilton Heights, Fort Hamilton, N. Y.
15. Floor plans, elevations, and perspective view of an Eight-room Ohio Dwelling, costing about Five Thousand Dollars.
16. Elegant design for a Bank Building at Knoxville, Tenn.
17. Design of the Yankee Cottage now at the American Exhibition, London.
18. Design for Elegant Residence of C. C. Bloomfield, Esq., Jackson, Mich. Two half page drawings, showing view in stair hall, perspective, and floor plans.
19. Interior view of Stable with horizontal floors and hygienic drainage. Three illustrations.
20. Design for Grant Monument, Riverside Park, New York. By H. A. Male.
21. Examples of Small City Houses at Paris.
22. Miscellaneous Contents: Removal of a Dividing Wall.—Plate Glass.—How to Remove Grease from Boilers.—Practical Use of Marble.—A New Composition.—The Ideal House of the Future.—Exhibition of Building Materials, Brussels.—Chimneys of the Ancients.—Preservation of Wood by Lime.—Vermont Marbles.—Snow Sheds on the Cascade Mountains.—The Corner Finish.—Granite.—Brick Dust Cement.—The Pietsch House Trap, illustrated.—Excavating in Frozen Ground.—Caen Stone.—To Obtain One's Bearings with a Watch.—Wood Carpet.—The Chimney Top.—Love Lies Bleeding.—Industries and Handicrafts in Central Africa.—Winter Palaces.—Silo Building, with four illustrations.—Pedestal Tenoner, illustrated.—The Pyramids.—Moulders' Sand.—Measurement of Masonry.—Failure of Concrete Dock Works.—Minute Writing.—Improved Ventilating Fan, illustrated.—Iron Frame Bell.—Old Method Roofing Plates.—Gladstone Bricks.—Cement Testing Machine, illustrated.—Food Economy before the American Association.

The Scientific American Architects and Builders Edition is issued monthly. $2.50 a year. Single copies, 25 cents. Forty large quarto pages, equal to about two hundred ordinary book pages; forming, practically, a large and splendid MAGAZINE OF ARCHITECTURE, richly adorned with elegant plates in colors and with fine engravings, illustrating the most interesting examples of Modern Architectural Construction and allied subjects.

The Fullness, Richness, Cheapness, and Convenience of this work have won for it the LARGEST CIRCULATION of any Architectural publication in the world. Sold by all newsdealers.

MUNN & CO., PUBLISHERS,
361 Broadway, New York.

Special.

OH! THAT HEADACHE.

"How I am tormented with this continual headache! It is ache! ache! ache! morning, noon, and night. It is the last feeling and thought before restless slumber and the first sensation at return of consciousness. It is the terror and torment of my life, and there seems no promise of an end to it while the lamp of life continues to burn. I feel at times as if I must go mad. I move about in my anguish, or must lie prostrate and helpless in my agony, with the sole pity, 'Oh, no! not sick; only has the headache.' But neither insanity nor death comes to my relief. On, on, must I pursue this path of persistent pain. No help, no comfort, no relief. The toothache may be ended by extracting the tooth, but where is the good surgeon that can extract the brain to stop the pain?"

The safe and best way is to reach the fountain of life, put it in as healthy condition as possible, strengthen and revitalize it, so that it may correct the disordered member and give nature the chance to reassert itself. This plan has been tried very successfully in hundreds of cases and found to be of permanent relief. One of the good virtues of the Compound Oxygen treatment is that it does not go into the stomach for the pretended purpose of attacking a specific disease, but increases the vital powers, so that nature may repel the invader.

For full information, write to Drs. Starkey & Palen, 1529 Arch Street, Philadelphia, Pa., for one of their little books called "Compound Oxygen: Its Mode of Action and Results," which they will send free upon application, also their monograph on headache.

Business and Personal.

The charge for Insertion under this head is One Dollar a line for each insertion; about eight words to a line. Advertisements must be received at publication office as early as Thursday morning to appear in next issue.

Wanted—A person with some capital, conversant with the lobster canning business. Address R. M. Munroe, Great Kills, Staten Island, N. Y.

I wish to arrange with some responsible manufacturing concern to manufacture and introduce my improved door pull and latch, patented July 19, 1887, No. 366,808. Manufacturers looking for a promising specialty in this line will do well to investigate. Address F. Bason, 5641 Atlantic Street, Englewood, Ill.

Graphite Lubricating Co., Jersey City, N. J. Graphite bushings and bearings, requiring no grease or oil.

For Sale—The one-half interest in two different patents on running gear for vehicles. Two efficient inventions, which are simple, practical, and serviceable. Approved by all who have examined them. Containing correct principles and all the required elements upon which to build a lucrative business. For particulars address lock box H, Rosendale, N. Y.

Catarrh Cured.

A clergyman, after years of suffering from that loathsome disease, catarrh, and vainly trying every known remedy, at last found a prescription which completely cured and saved him from death. Any sufferer from this dreadful disease sending a self-addressed stamped envelope to Prof. J. A. Lawrence, 212 East 9th St., New York, will receive the recipe free of charge.

Patent Rights for Sale. Apparatus for building Concrete Buildings and Walls. County rights, $50. State rights, $500. See descriptive notice in SCI. AMERICAN, May 22, 1886. Send for circulars. Ransome, 402 Montgomery St., San Francisco, Cal.

Pedestal tenoner. All kinds woodworking machinery. C. B. Rogers & Co., Norwich, Conn.

Stationary and boat engines, boilers. Best and cheapest. 1 to 10 H. P. Washburn Engine Co., Medina, Ohio.

Graphite Bushings.—Put them on all loose pulleys.

For the latest improved diamond prospecting drills, address the M. C. Bullock Mfg. Co., 138 Jackson St., Chicago, Ill.

The *Railroad Gazette*, handsomely illustrated, published weekly, at 73 Broadway, New York. Specimen copies free. Send for catalogue of railroad books.

The Knowles Steam Pump Works, 113 Federal St., Boston, and 93 Liberty St., New York, have just issued a new catalogue, in which are many new and improved forms of Pumping Machinery of the single and duplex, steam and power type. This catalogue will be mailed free of charge on application.

Link Belting and Wheels. Link Belt M. Co., Chicago.

Presses & Dies. Ferracute Mach. Co., Bridgeton, N. J.

Woodworking Machinery of all kinds. The Bentel & Margedant Co., 116 Fourth St., Hamilton, O.

Nickel Plating.—Sole manufacturers cast nickel anodes, pure nickel salts, polishing compositions, etc. $100 "*Little Wonder.*" A perfect Electro Plating Machine. Sole manufacturers of the new Dip Lacquer Kristaline. Complete outfit for plating, etc. Hanson, Van Winkle & Co., Newark, N. J., and 92 and 94 Liberty St., New York.

Supplement Catalogue.—Persons in pursuit of information of any special engineering, mechanical, or scientific subject, can have catalogue of contents of the SCIENTIFIC AMERICAN SUPPLEMENT sent to them free. The SUPPLEMENT contains lengthy articles embracing the whole range of engineering, mechanics, and physical science. Address Munn & Co., Publishers, New York.

Iron Planer, Lathe, Drill, and other machine tools of modern design. New Haven Mfg. Co., New Haven, Conn.

Curtis Pressure Regulator and Steam Trap. See p. 157.

Power, 113 Liberty St., N.Y. $1 per yr. Samples free.

Beach's Improved Pat. Thread Cutting and Diamond Point Lathe Tool. Billings & Spencer Co., Hartford, Ct.

We are sole manufacturers of the Fibrous Asbestos Removable Pipe and Boiler Coverings. We make pure asbestos goods of all kinds. The Chalmers-Spence Co., 419 and 421 East 8th Street, New York.

Cushman's Chucks can be found in stock in all large cities. Send for catalogue. Cushman Chuck Co., Hartford, Conn.

The Improved Hydraulic Jacks, Punches, and Tube Expanders. B. Dudgeon, 24 Columbia St., New York.

Veneer Machines, with latest improvements. Farrel Fdry. Mach. Co., Ansonia, Conn. Send for circular.

Tight and Slack Barrel Machinery a specialty. John Greenwood & Co., Rochester, N.Y. See illus. adv., p. 28.

Hodges' universal angle union makes pipe connection at any angle. Rollstone Machine Co., Fitchburg, Mass.

Quints' patent automatic steam engine governor. Correspondence solicited from manufacturers of throttle governor engines. Leonard & McCoy, 118 Liberty Street, New York.

Friction Clutch Pulleys. D. Frisbie & Co., N.Y. city.

Send for new and complete catalogue of Scientific Books for sale by Munn & Co., 361 Broadway, N. Y. Free on application.

Notes & Queries

HINTS TO CORRESPONDENTS.

Names and Address must accompany all letters, or no attention will be paid thereto. This is for our information, and not for publication.

References to former articles or answers should give date of paper and page or number of question.

Inquiries not answered in reasonable time should be repeated; correspondents will bear in mind that some answers require not a little research, and, though we endeavor to reply to all, either by letter or in this department, each must take his turn.

Special Written Information on matters of personal rather than general interest cannot be expected without remuneration.

Scientific American Supplements referred to may be had at the office. Price 10 cents each.

Books referred to promptly supplied on receipt of price.

Minerals sent for examination should be distinctly marked or labeled.

(1) A. S. S. asks what will remove the stain of iodine from the hair of a horse without injury to the horse or hair? A. Try rectified alcohol.

(2) J. A. asks in what manner chemicals are applied to paper, so as to form crystalline coating. A. Mix a very concentrated cold solution of salt with dextrine, and lay the thinnest possible coating of the fluid on the surface to be covered by means of a broad, soft brush. The following salts also produce beautiful crystalline coatings: sulphate of magnesium, acetate of soda, and sulphate of tin. The paper must first be sized, otherwise it will absorb the fluid and prevent the formation of the crystals on its surface.

(3) A. H. wants formula for making line negatives. A. Volkmer's process as detailed in *Photographic Times Almanac* is good, as follows:

Plain Collodion.

Ether	500 grammes.
Alcohol	400 "
Pyroxyline	16 "

Sensitizer.

Chloride of calcium	1·6 grammes.
Iodide ammonium	4·7 grammes.
Iodide cadmium	7·8 grammes.

Dissolve in 100 grains of absolute alcohol and mix with the collodion.

Silver Bath.

Nitrate of silver	1 ounce.
Distilled water	10 "

Iodize, and acidulate with nitric acid.

Intensifier.

A. Bromide of potassium	¼ ounce.
Water	4 "
B. Sulphate of copper	½ "
Water	4 "

Mix equal parts A and B and pour on the film. When perfectly whitened, blacken with nitrate of silver, 30 grains to ounce of water. In place of the above method try a very slow grade of gelatino-bromide plate and develop with an excess of pyro, previously soaking plate for 3 minutes in solution of gallic acid, 3 grains to each ounce of water.

(4) P. H. asks how photographs are enameled. A. The ordinary way is to first prepare a sheet of glass by flowing over it a solution of wax or paraffine in ether, then rubbing it over with a dry cloth, which leaves a thin film of wax on the glass, then, when dry, in coating the glass with a thin, transparent plain collodion. This is allowed to partially set, and is then immersed in water until the greasy lines disappear. The dampened albumen print is then squeegeed face downward on the collodion film. When dry, by cutting around the picture with a knife, the print is pulled up at one corner, bringing with it the collodion film, which gives the fine glossy appearance so much admired. For further details see SCIENTIFIC AMERICAN SUPPLEMENT, No. 78, page 1062.

(5) J. C. asks how magic photographs are made, which appear when the paper or glass supporting the film is blown upon by the breath. A. The picture is printed and fixed in the usual way, but not toned; then it is bleached out with a solution of bichloride of mercury. It may now be made visible again by blowing on it with the breath, especially if the smoke from a cigar is mingled with the breath. The picture may also be reproduced by placing the print upon a pad of blotting paper saturated with hyposulphite of soda.

(6) J. H. and G. W. H.—The mottling of small pieces of iron by the case-hardening process has no peculiarities further than protecting the work from the oxidizing effect of air while in the process of heating and the rapidity of transfer to the water when ready for hardening. The process consists in packing the pieces carefully in animal charcoal (charred leather, scrap hoofs or horn), pulverized so as to allow it to pack closely in contact with the surface of all the articles, in an iron box (cast iron preferred), with a cover to fit closely inside, so that if the box is not full the cover will set in contact with the material. Have no articles touch each other; press the cover down and put a little white sand on top to prevent air passing in between the cover and box. Heat the box in a forge fire or furnace to a bright red heat: keep it at this heat for 15 minutes for small articles like gun lock work. Then take off the cover and seize the box with a pair of tongs; hold it over a tub of water, tip the box, and spill gently the contents (iron and charcoal) into a tub of water. The time of dropping the pieces into the water governs the depth of color. This must be had by practice. Turning the box over slowly and shaking clears the pieces

© 1887 SCIENTIFIC AMERICAN, INC.

from the charcoal and gives each piece a short exposure to air while hot; the oxidation by contact with the air while hot gives the color or cloudiness. The distance the box is held above the water may be 6 inches to 2 feet, according to the effect you wish to produce. The work should be taken from the water immediately, dipped in boiling hot lime water, dried, and oiled.

(7) G. H. S. asks: 1. Is it true that the force of an explosion of dynamite, giant powder, or indeed any of the nitroglycerine compounds, acts vertically? If true, does it exert greatest pressure downward? If above be true, please explain the *rationale* of the phenomenon. Why does dynamite when exploded differ from gunpowder, since, like gunpowder, the pressure is produced by the rapid disengagement of a large volume of gas under the action of heat, due to chemical combination? A. The explosion of dynamite and similar compounds differs from that of gunpowder in being more sudden. It acts equally in all directions except as modified by the position of the point of ignition. It is often supposed to act most violently downward, because the air shows no effects of an explosion. The general reason why dynamite is more powerful than gunpowder is because it is a chemical compound, and not a mechanical mixture. 2. Why does dynamite explode better by the use of a detonator than by a match, for by either heat is applied? A. The detonator seems to start the molecules into decomposition more suddenly and with more energy than a match.

(8) W. H. complains of having trouble in working Prof. Husnick's asphaltum process. A. First obtain a pure solution of asphaltum in turpentine from some reliable drug house; we recommend Eimer & Amend, New York. Add a little oil of lemon. Then coat the plate, expose, and when dry and cold proceed to develop. This requires great care, and is apt to proceed too rapidly. For further particulars see SCIENTIFIC AMERICAN SUPPLEMENT, No. 158, page 2507, No. 138, page 2195, No. 243, page 3866. The benzole dissolves out the portions of the film not affected by light.

(9) J. V. F. writes: I have a linoleum cloth on my floor which looks rough and the first finish is worn off. What shall I use to renew it and make it last longer? A. Wash occasionally with skim milk and water. Rub once in three months with boiled linseed oil. Put on a very little, rub it well in with a rag, and polish with a piece of old silk.

(10) A. G. A. N. writes: I have a large quantity of argentic nitrate partially oxidized; also some scraps of gold of different carats. How am I to proceed to extract the pure metal from each one? A. See Practical Hints on Saving Gold and Silver Wastes, in SCIENTIFIC AMERICAN SUPPLEMENT, No. 307. Metallic silver can be obtained by fusing the chloride with dry sodic carbonate in a Hessian crucible, and the gold is thrown down by iron sulphate from a solution of its salts.

(11) B. H. L. asks: How can I fasten a lead top on a carbon plate? A. Make a mould of wood or plaster of Paris large enough to inclose the end of the carbon, and also to produce a cavity for the lead, then cast the lead around the carbon. The mould, if made of plaster, should be thoroughly vented and baked before use.

(12) J. C. F. P. asks for instruction for making large (or small) trays out of wood, for photographic purposes—the best manner of making the joints, and the best process of rendering them water and chemical proof. A. Make them of white pine. Halve the corners. Put them together with brass screws. Soak the tray when done in hot paraffine, or make the joints with glue to which has been added a little bichromate of potash. Expose to daylight for 10 or 12 hours, and finally varnish heavily with alcoholic shellac varnish.

(13) E. P. B. asks: Is there any drug or acid or any other cheap preparation that will destroy the smell attaching to salad oil and China nut oil, and render them odorless and not make them muddy or discolored? A. Thoroughly wash the oils with hot water, frequently renewed, or blow steam through them until the desired effect is produced. Air freely employed for some time succeeds admirably with certain oils, and its use has the advantage of not introducing moisture into the article. Another method is to boil the oil for 15 to 30 minutes with calcined magnesia. To remove the odor, however, charcoal is the simplest means, but of course it takes the color with it.

(14) J. A. asks: 1. Is there any way of removing stains made by water in tracing cloth? A. Tracing cloth is made by varnishing linen with Canada balsam dissolved in turpentine, to which a few drops of castor oil have been added. An application of this mixture will cover the spots from which it has been partially removed by water. 2. I desire a rapid method for copying printed engravings, cuts, etc., clearly, from one book into another, without injuring the leaves in either book; or how could I accurately reproduce them in any manner? A. We know of nothing simpler than photography.

(15) J. G. C. asks: 1. Can I obtain a supply of oxygen by any simple process of separation from the atmosphere? A. For separation of oxygen from the atmosphere, we refer you to our SCIENTIFIC AMERICAN SUPPLEMENTS, Nos. 92, 119, 313, which we can send you for 10 cents each. 2. Why does egg albumen assume the condition it does from the effect of beating? A. Egg albumen has a high coefficient of viscosity and does not evaporate. Hence the bubbles it forms last for a long time.

(16) W. H. R. asks: 1. Is there any cement that will fasten glass to brass? A. Boil 3 parts of resin with 1 part of caustic soda and 5 parts of water, thus making a kind of soap, which is mixed with ½ its weight of plaster of Paris. 2. Please give the analysis of refined petroleum. A. It should have a density of 46° Baume, a flashing point of 115° Fah., and a burning point of 138° Fah. 3. Is there much chance for improvement in oil lamps? A. There is always an opportunity of producing something better, although a great deal has been done in this line. 4. What is the extreme range of the English 110 ton gun? A. They penetrate 35 inches of iron at 1,000 yards. See SCIENTIFIC AMERICAN SUPPLEMENT, No. 586, for article on this subject. Such guns are very seldom tested as to the extreme distance to which they would send a projectile. To do this they would have to be fired at an angle of 45 degrees, and the whole force would be expended in carrying the projectile the greatest distance. They are instead fired with a much flatter trajectory, to give penetrating power of more or less efficiency at a certain distance.

(17) E. K.—The black willow flowers in May, and fruits in June. As the catkins usually fall off in one piece soon after fruiting, you will probably not be able to obtain any so late in the season. The black willow is widely distributed, and ought to be found in abundance in your neighborhood. If you need the catkins for study, you might perhaps get dried specimens from Mr. M. S. Bebb, of Rockford, Ill., who has made the study of willows a specialty.

(18) W. H. H. desires a receipt for making a white liquid for stamping with perforated paper patterns on dark goods. A. Use white lead mixed with dry gum arabic powder, which goes through the perforations and is attached to the material by pressing with a hot iron. We know of no fluid for the purpose.

(19) D. L. asks if there is any economical way to condense the exhaust steam of an engine so it can be used in the boiler again, where the water supply is very short. A. An air condenser may be made of iron pipe so that air can circulate upon the outside, cooling the pipe, which in turn will condense the steam upon the inside. If you have a small portion of water to spare, the coil may have a sprinkler over it, so as to wet the surface with cold water, which will enable you to use a much smaller coil than when cooled by air alone.

(20) O. C.—You can carry steam 200 or 300 feet if pipes are carefully felted and boxed, with very little loss. You cannot pump as much water through a two inch pipe as a pump having a 3 inch discharge opening is capable of pumping.

(21) J. J.—The pole star is about 1° 17′ from the true pole. When Polaris is on the meridian at upper culminations, the star Alioth, the second star from the pointer in the dipper handle, will be on the lower meridian. The east and west elongation is opposite to Alioth when Alioth is at the same altitude as Polaris.

(22) A. S. E. asks (1) how to take iron rust from granite. A. Scrub with dilute muriatic acid. 2. A cement to make joints for granite monuments. A. Use clean sand 20 parts; litharge 2 parts; quicklime 1 part; and linseed oil, sufficient to form a thin paste. See SCIENTIFIC AMERICAN SUPPLEMENT, No. 313.

(23) C. W. desires a recipe for preserving the juice of lemons. A. Mix it with one-tenth of alcohol and then bottle. By this means it will be prevented from decomposing.

(24) Portmanteau asks: What would be the best way of renovating a black canvas covered portmanteau on which the color has been rubbed off a good deal? A. Coat it with a black leather varnish, such as the following: Digest shellac 12 parts, white turpentine 5, gum sandarac 2, lampblack 1, with spirits of turpentine 4, and alcohol 96.

(25) R. & K. ask the manner of preparing and the ingredients used in the manufacture of carpenter's prepared chalk. A. The ordinary white crayons are made by taking the finest powder of calcined oyster shells, sifted through muslin. Mix up with water in which a little rice and a little white sugar candy has been boiled; according to the quantity of the rice, so will be the hardness of the crayon. For process of manufacture, see Spons' "Workshop Receipts," first series, which we can send you for $2.

(26) H. S. asks: 1. What is understood by second growth of potatoes? A. In order to obtain a maximum crop of potatoes, they must have constant growth, which, if checked in any way, the tuber ceases to enlarge evenly and starts a second growth from its eyes, forming prongy or knoby potatoes. 2. What kind of grass is best on a hill that washes? A. Bermuda. 3. Where can I get a good book on poultry? A. We can send you Lewis' "Practical Poultry Book" for $1.50, postpaid.

(27) E. R. S. desires a preparation that is good for marking and stenciling cases with a brush. I have been using lamp black, but it rubs off so. I am now using bluing, but it is so thin that I cannot stencil with it, and it also runs terribly in marking. A. Dissolve ordinary asphaltum in turpentine, and you will have an excellent stenciling ink. See also answer to query 2, in SCIENTIFIC AMERICAN for September 3, 1887.

(28) R. G. writes: I have in my possession a rosewood bassoon, which is cracked through in one of the joints. Would you give me a receipt for a cement or glue which will resist the warm moisture, and make the instrument air tight? A. Powder and dissolve one part of glue in one of thick linseed oil, varnish boiling hot, and mix thoroughly. In using it, heat the two pieces, apply the glue warm, and press the pieces together.

MINERALS, ETC.—Specimens have been received from the following correspondents, and have been examined with results stated.

A. T.—They are worthless.

TO INVENTORS.

An experience of forty years, and the preparation of more than one hundred thousand applications for patents at home and abroad, enable us to understand the laws and practice on both continents, and to possess unequaled facilities for procuring patents everywhere. A synopsis of the patent laws of the United States and all foreign countries may be had on application, and persons contemplating the securing of patents, either at home or abroad, are invited to write to this office for prices, which are low, in accordance with the times and our extensive facilities for conducting the business. Address MUNN & CO., office SCIENTIFIC AMERICAN, 361 Broadway, New York.

INDEX OF INVENTIONS

For which Letters Patent of the United States were Granted

September 6, 1887,

AND EACH BEARING THAT DATE.

[See note at end of list about copies of these patents.]

Auger power and tile injector, fountain, Monroe & Stoke ... 369,545
Automatic indicator, W. Goodhue ... 369,639
Awning, F. Hohorst ... 369,601
Axles, making car, S. T. Wellman ... 369,488
Axles, method of and die for forming the centers and end collars of car, S. T. Wellman ... 369,487
Bag. See Feed bag.
Baling press, D. Bromley ... 369,582
Baling press, J. La Dow ... 369,454
Baling press, E. F. Stoddard ... 369,662
Baling press, C. E. Whitman ... 369,573
Band for paper, currency, etc., O. S. Matthews ... 369,543
Bed or crib, C. Lucacs ... 369,605
Belt tightener, S. W. Putnam ... 369,364
Berry box, W. H. Moser ... 369,651
Bicycle, J. L. Yost (r) ... 10,864
Bicycle holder, G. L. Bailey ... 369,494
Bit. See Bridle bit.
Blind slat rod, C. Urich ... 369,484
Block. See Printing block. Wagon block.
Boats, etc., bridge brow for ferry, H. Brooke ... 369,429
Boiler. See Steam boiler.
Boiler for steam heating, J. S. Priest ... 369,470
Bolt heading machine, W. E. Ward ... 369,375
Book cover, writing, J. M. Kent ... 369,532
Book, election, E. L. & E. L. Barrett ... 369,312
Book folding machine, E. T. Hazeltine ... 369,593
Book holder, W. Simmonds ... 369,475
Boot or shoe sole, A. Deubert ... 369,323
Bottle stopper, G. A. Gessner ... 369,332
Box. See Berry box. Cigarette box.
Bracelet, T. H. Krementz ... 369,452
Brake. See Car brake. Wagon brake.
Bridge wall, A. Snell ... 369,564
Bridle bit, Williams & Tanner ... 369,490
Bridle winker stay, Ryan & Knapp ... 369,367
Broom or mop holder, W. Craine ... 369,318
Buckle, J. C. Hyde ... 369,526
Buckle, suspender, A. L. Purdy ... 369,656
Buckles, making frames for harness, W. B. Brooks ... 369,430
Buggy boot, T. E. Stevens ... 369,567
Burner. See Gas burner.
Bustle, M. Leaman ... 369,455
Button or stud, L. Rousselle ... 369,557
Cabinet for paper and other materials, J. T. Hoyt ... 369,642
Cabinet, medicine, A. Claypool ... 369,590
Cables, art of splicing, J. Collins ... 369,435
Cables, etc., grip for, P. Kelly ... 369,531
Can testing machine, W. B. Mann ... 369,539
Car brake, L. Messier ... 369,461
Car coupling, S. A. Alexander ... 369,382
Car coupling, T. G. Ashford ... 369,384
Car coupling, J. R. Avery ... 369,578
Car coupling, C. W. Chisholm ... 369,502
Car coupling, S. G. Howe ... 369,523
Car coupling, B. W. Sweet ... 369,369
Car coupling, D. Y. Wilson ... 369,576
Car mover, A. Stockdale ... 369,413
Car, power driven street, J. Noble ... 369,610
Car replacer, Kelly & Lee ... 369,530
Car wheel riveting machine, R. Kells ... 369,643
Cars by electricity, apparatus for lighting, S. H. Short ... 369,561
Carding engines, mechanism for stripping the top flats of, A. Falls ... 369,444
Carpet fastener, J. McPherson ... 369,555
Carriage, C. Thomas ... 369,570
Carriage jack, R. J. Butterfield ... 369,433
Carrier. See Cash and package carrier.
Cart, road, D. C. Plank ... 369,362
Case. See Medicine case. Photographic bag case.
Cash and package carrier, L. G. Bostedo ... 369,628
Catch, safety, J. Dunstan ... 369,399
Chain links, machine for sorting and finishing, J. D. Storie ... 369,620
Chair. See Convertible chair. Reclining chair.
Chance device, Heston & Akers ... 369,404
Chopper. See Cotton chopper.
Chuck indicator attachment, C. O. Wilder ... 369,489
Churn, C. Bennet ... 369,426
Churn dasher, L. D. Bunce ... 369,583
Chute, vertical, J. N. Briggs ... 369,490
Cigar bunching machine, J. R. Williams ... 369,419
Cigar press, A. Ullrich ... 369,373
Cigarette box, M. Mendizabal ... 369,408
Cleaver, butcher's, F. Kortick ... 369,406
Clip. See Hame clip.
Clock case, mould, C. Hellebush ... 369,387
Clock, electric alarm, A. G. Woolley ... 369,672
Clock, universal, S. S. Moyer ... 369,462
Clocks, electric synchronizing attachment for, E. F. Bard ... 369,386
Cloth cutting machine, T. W. Parshall ... 369,466
Clothes drier and lawn tent, combined, Averill & Sharp ... 369,493
Cock, plug, J. Powell ... 369,613
Collar pad, horse, J. Morrow ... 369,650
Collars, sweat pad fastening for horse, F. Benoit ... 369,496
Combination lock, J. W. Estes ... 369,331
Convertible chair and cot, P. C. Lewis ... 369,347
Copies of writings, drawings, and the like, means for obtaining, O. Leim ... 369,536
Core barrel, collapsible, D. G. Coppin ... 369,317
Cotton chopper, E. W. Clark ... 369,516
Cotton, etc., machine for opening and cleaning, W. & W. Lord ... 369,350
Coupling. See Car coupling. Hame coupling. Pipe coupling.
Crane, R. Bagaley ... 369,423
Cultivator and pulverizer, combined, J. Ashenfelter ... 369,492
Cultivator tooth, M. A. Eisenhour ... 369,508
Cultivator, wheel, Berger & Sousley ... 369,497
Curd mill, J. P. Roberge ... 369,555
Curtain fixture, S. H. Weltner ... 369,380
Cutter. See Vegetable cutter.
Damper handle, S. Abbott ... 369,309
Digger. See Potato digger.
Door hanger, W. O. Kasson ... 369,451
Doors, lever catch for double, F. Link ... 369,458
Doors, windows, etc., frame for, O. A. Bingham ... 369,581
Drawer pull, W. W. Chilton ... 369,315
Drawers or boxes, frame or rim for, J. J. Grant ... 369,519
Drier. See Clothes drier. Grain drier.
Drill. See Grain drill. Rock drill. Well drill.
Dust conveyer, W. J. Martin ... 369,542
Dust guard, L. K. Fuller ... 369,596
Effervescent beverage powder, R. C. Scott ... 369,368
Electric cable, bunched, J. H. Dalzell ... 369,593
Electric cable, underground, J. H. Dalzell ... 369,320
Electric cables, manufacture of bunched, J. H. Dalzell ... 369,592
Electric cables, manufacture of diminishing, J. H. Dalzell ... 369,594
Electric generator, dynamo, R. Eickemeyer ... 369,400
Electric light filaments, carbonizing mould for incandescent, E. P. Thompson ... 369,664, 369,666
Electric light filaments, testing, E. P. Thompson ... 369,665
Electric machine regulator, dynamo, E. Place ... 369,655
Electrical conductor, H. F. Campbell ... 369,394
Electrical distribution, system of, T. A. Edison, 369,439, 369,441 to 369,443
Elevator. See Grain elevator.
Engine. See Locomotive engine. Rotary engine. Steam engine.
Engines, cut-off gear for, B. V. Nordberg ... 369,612
Exhibitor, dry goods, A. J. Nichols ... 369,464
Exhibitor, shade, R. K. Slaughter ... 369,476
Eyeglass or spectacle frame, J. J. Minster ... 369,544
Fastening device, G. Lighthiser ... 369,348
Feed bag, F. H. Burnham ... 369,393
Fender. See Wheel fender.
Fence, H. C. Barnet ... 369,627
Fence, J. C. Van Cleave ... 369,571
Fencing, machine for making wire-and-wood, W. Bundy ... 369,584
Fence, picket, J. Wintrode ... 369,671
Fence post, J. O. Brookbank ... 369,500
Fence post, A. W. Tourgee ... 369,371
Fertilizers, apparatus for treating, W. B. Chisolm ... 369,434
Fire back, adjustable, J. W. Keyes ... 369,533
Fire escape, L. H. La Roy ... 369,647
Fires in buildings, means for obtaining access to, H. Eppelsheimer ... 369,636
Fishing line reel, E. Titus, Jr ... 369,622
Food, apparatus for heating and canning, J. Baker ... 369,424
Food, compound, J. H. Stebbins, Jr ... 369,660
Frame. See Eyeglass or spectacle frame. Ornamental frame. Window, picture, or other frame.
Furnace. See Hot air furnace.
Gauge. See Micrometer frame gauge.
Galvanic cell, L. Drescher ... 369,505
Gas burner, A. F. Zimmerling ... 369,421
Gas pressure regulator and cut off, Faulkner & Pope ... 369,445
Gas regulator, C. Pattrell ... 369,467
Gate. See Railway gate. Railway crossing gate.
Gate, S. F. Kniss ... 369,644
Generator. See Steam generator.
Governors, safety stop for, B. V. Nordber ... 369,611
Grain boats, apparatus for unloading, L. Messier ... 369,460
Grain drier, J. H. McDonald ... 369,607
Grain drill and seeder, W. D. Arnett ... 369,383
Grain drills, seeding attachment for, W. R. Dudley ... 369,506
Grain elevator, harvester, E. B. Copley ... 369,396
Grinding and polishing the external surfaces of hollow ware, machine for, J. T. Duff ... 369,327
Grinding and polishing the interior of hollow ware, machine for, J. T. Duff ... 369,326
Guard. See Dust guard.
Gun, A. D. Blanchard ... 369,313
Gun, breech-loading shot, A. Dickerman ... 369,437
Hame clip, A. F. Duvall ... 369,685
Hame coupling, F. W. Hoefer ... 369,338
Hame coupling, A. J. Sonner ... 369,618
Hammock spreader, A. Nickerson ... 369,546
Handle. See Damper handle.
Hanger. See Door hanger.
Harness attachment, P. D. Derickx ... 369,322
Harrow, rotary, J. R. Hicks ... 369,600
Hat pouncing machine, H. Griffin ... 369,520
Hay rake, horse, Kissner & Gromme ... 369,604
Hay stacker, D. D. Domas ... 369,324
Header and thrasher coupling, combined, D. Best ... 369,498
Heating apparatus, G. H. Benjamin ... 369,425
Heating apparatus, electrical, A. H. Buckelew ... 369,432
Heel plates, machine for attaching, F. H. Richards ... 369,554
Hinge, L. H. Lempert ... 369,346
Holder. See Bicycle holder. Book holder. Broom or mop holder. Ribbon holder.
Hook. See Snap hook.
Hopple, E. W. Parrish ... 369,548
Horse power, Hohlfelder & Carpenter ... 369,449
Hot air furnace, G. Stephenson ... 369,480
Hub, vehicle, M. B. Mahurin ... 369,538
Ice and slush melting attachment, J. N. Briggs ... 369,389
Ice creeper, R. Heunsch ... 369,522
Ice sawing machine, G. Trahan ... 369,415
Incrustation preventive, T. Dooley ... 369,325
Indicator. See Automatic indicator.
Injector, automatic oil, P. Hubert ... 369,524
Insulator, E. T. Greenfield ... 369,447
Iron. See Sad iron. Soldering iron. Staple protecting iron.
Iron or steel direct from the ores, apparatus for producing malleable, C. Husgafvel ... 369,525
Iron, reducing and melting magnetic oxide of, W. E. Norris ... 369,361
Jack. See Carriage jack. Lifting jack. Wagon jack.
Jewelry, manufacture of shell, C. Moegling ... 369,649
Key fastener, S. H. Paulmier ... 369,468
Knife attachment, skinning, D. J. Brougher ... 369,314
Knitted drawers, lady's, J. Persch ... 369,549
Knitting machine, straight, R. Klinger ... 369,348
Krotophone, F. C. Watkins ... 369,377
Krotophone receiver, F. C. Watkins ... 369,378
Ladder, step, W. R. Allan ... 369,491
Lamp, arc, D. J. Hauss ... 369,640
Lamp, electric, O. P. Loomis ... 369,349
Lamp, electric arc, H. Lemp ... 369,456
Lamp, petroleum, W. E. A. Hartmann ... 369,598
Latch, gate, T. Martin ... 369,352
Lead armored conductor and making the same, T. G. Turner ... 369,372
Life preserver, Creamer & Leach ... 369,319
Lifter. See Transom lifter.
Lifting jack, F. Kellogg ... 369,529
Lifting jack, W. F. Knowlton ... 369,615
Lightning arrester, A. B. Depuy ... 369,436
Lights, feed mechanism for arc, W. W. Street ... 369,568
Lime or cement, manufacture of, H. Mathey, 369,353, 369,354
Lock. See Combination lock. Railway turntable lock.
Locomotive engine, W. J. Tripp ... 369,482
Looms, compart board for Jacquard, G. W. Stafford ... 369,565
Lubricator, P. A. Bennett ... 369,388
Lumber assorter, Phillips & Whaley ... 369,550
Medicine case or satchel, D. L. De Myers ... 369,438
Metal rolls, apparatus for transferring the products of, F. H. Daniels ... 369,503

© 1887 SCIENTIFIC AMERICAN, INC.

Metal slitting machine, J. Vermeulen..... 369,669
Micrometer gauge, J. Moffitt..... 369,357
Mill. See Curd mill.
Mould. See Clock case mould.
Music, appliance for holding sheet, C. F. Lancaster..... 369,534
Musical instrument, mechanical, J. E. Treat..... 369,667
Oil cloth, manufacture of, H. L. & I. H. Storey..... 369,414
Oiler and attachment for vehicles, J. Butcher..... 369,651
Organ stop knob, R. Alden..... 369,310
Ornamental frame, L. M. Pratt..... 369,410
Packing, piston rod, Small & Warner..... 369,562
Pad. See Collar pad.
Pails, heating device for dinner, F. W. Seymour.. 369,412
Paint and paint compounds, G. W. Banker..... 369,385
Paper pail cover, T. F. W. Schmidt..... 369,559
Pavement, E. A. Snow..... 369,478
Pea shooter, J. L. Vallier..... 369,485
Pen, fountain, E. Marble, Jr..... 369,351
Pencils, etc., sharpener for, O. Mussinan, Jr 369,652
Photographer's bag case and plate holder, Koppe & Moh..... 369,646
Photographic camera finder, W. H. Fuller..... 369,515
Pipe coupling, A. Wilbur..... 369,574
Pipe wrench, W. Gormley..... 369,336
Pipes, machine for threading sheet metal, F. F. Voigt..... 369,417
Pitchers or other vessels, guard for water, S. Whinery..... 369,381
Plaiting and machinery therefor, method of, N. Fraser..... 369,514
Planter, corn, W. Dunkle..... 369,507
Planter, seed, J. Campbell..... 369,585
Planter, seed, D. Leblanc..... 369,345
Planters, dropping attachment for corn, J. M. Bryant..... 369,630
Plow, T. Brunner..... 369,391
Plow, C. Engel..... 369,329
Plow and harrow, combined, W. P. Clark..... 369,589
Plow and seeder, combined, B. F. Parks..... 369,409
Plows, frame for, sulky, E. L. Clancy..... 369,588
Polishing lap, G. E. Brown..... 369,431
Post. See Fence post.
Potato digger, A. C. Collins..... 369,501
Powder. See Effervescent beverage powder.
Power. See Auger power. Horse power.
Press. See Baling press. Cigar press.
Pressure regulator, automatic, Schmidt & Christ.. 369,474
Projectile, J. McCreary..... 369,459
Protector. See Skirt and stocking protector. Tree protector.
Printing, M. D. Wilkins..... 369,575
Printing block, J. R. Cummings..... 369,632
Printing block, metallic, J. M. Hawkes..... 369,521
Printing plates, manufacturing, T. J. Bicksler.... 369,580
Pulley, wooden, Casada & Henderson..... 369,586
Pulleys, frame for sash, D. C. Lyon..... 369,648
Pumps, gearing for operating windmill, J. E. Jordan..... 369,602
Pumps, motor for operating, Downey & Collier.... 369,634
Punching machine, A. Gay..... 369,597
Punching machine, gang, F. Kohler..... 369,344
Rail. See Railway rail. Railway guard rail.
Railway crossing gate, Thelen & Cluever..... 369,621
Railway gate, B. E. Wells..... 369,624
Railway guard rail, F. X. Georget..... 369,446
Railway rail, street, D. C. Cregier..... 369,398
Railway, street, D. C. Cregier..... 369,397
Railway switch, J. Donovan..... 369,633
Railway system, endless, L. Goddu..... 369,335
Railway tie, J. H. Coffman..... 369,591
Railway train signal, C. M. Radford..... 369,657
Railway turntable lock, W. H. Inloes *et al*..... 369,527
Rake. See Hay rake.
Reclining chair, Scarritt & Mosley..... 369,558
Reel. See Fishing line reel.
Regulator. See Electric machine regulator. Gas regulator. Gas pressure regulator. Pressure regulator.
Rein guide, N. D. Noble..... 369,465
Ribbon holder, G. A. Loyd..... 369,537
Rock drill, diamond, W. Odgers..... 369,654
Rod. See Blind slat rod.
Roller mills, feed mechanism for, C. Poister..... 369,551
Rolling ribbed plates, device for, J. D. Ellis..... 369,328
Rolling seamless tubes, machine for, W. H. Appleton..... 369,311
Rope machine, straw, Stephens & Carter..... 369,479
Rotary engine, Perrott & Warrington..... 369,469
Rule, pocket, E. R. Billings..... 369,499
Sad iron, A. Rosa..... 369,556
Sad iron, N. R. Streeter..... 369,569
Sash fastener, W. H. Weddington..... 369,670
Sash fastener, F. O. Weydell..... 369,418
Satchel, H. & I. Scheuer..... 369,472
Sawmill carriage, W. Gowen..... 369,518
Sawmill dog, W. Gowen..... 369,517
Sediment trap and solution clarifier, M. H. Levett..... 369,457
Seeder and harrow, combined, G. D. Carmer..... 369,395
Seeders, pulverizing attachment for, A. Torgerson..... 369,481
Sewing machine loop takers, mechanism for imparting variable motion to, A. Steward..... 369,619
Sewing machine, shoe sole, E. H. Smith..... 369,563
Sewing machine trimmer, Muther & Woodward. 369,653
Sewing machine trimming attachment, C. G. Rutz..... 369,658
Sewing machines, buttonhole cutter for, F. E. Schmidt..... 369,473
Shingle, metallic, H. Smeeton..... 369,477
Shingle sawing machine, W. J. Tunmore..... 369,668
Shoe soles, roll for buffing, Fox & Pope..... 369,513
Shovel blanks, machine for splitting the tangs and forming the sockets of, H. M. Myers..... 369,360
Sign or signal, A. R. Pullin..... 369,614, 369,615
Signal. See Railway train signal.
Skirt and stocking protector, G. H. Lasswell..... 369,535
Slates, pencil holder for, C. E. Swaney..... 369,663
Sled, Moulton & Rempis..... 369,359
Snap hook, B. D. Geib..... 369,516
Soldering iron, C. G. Sneider..... 369,617
Spark arrester, J. M. C. Tyner..... 369,483
Speaking tube attachment, J. E. Kelly..... 369,340
Spinning machines, saddle for top rolls of, E. Dixon..... 369,504
Square, surface gauge, and level, combined try, G. Nicolescu..... 369,547
Stall, cattle, J. Gibbs..... 369,333
Staple protecting iron, C. H. Bungarz..... 369,392
Steam boiler, J. Gamgee..... 369,402
Steam boiler, C. J. M. Hayna..... 369,448
Steam engine, J. H. Fogarty..... 369,511
Steam engine, compound, M. Young..... 369,674
Steam generator, H. C. Holloway..... 369,405
Stocking, N. T. Folsom..... 369,637
Stone sawing machine, W. Murphy..... 369,463
Stopper. See Bottle stopper.
Stove, M. L. Ramey..... 369,365
Stove back, W. C. Metzner..... 369,356
Stove grate, A. L. Goodenow..... 369,334
Stove heating apparatus, H. Schreiner..... 369,114
Stove, oil, A. F. Zimmerling..... 369,420, 369,422
Stoves or fire boxes, gas connection for hot blast, H. Kennedy..... 369,341
Stoves, stack connection for hot blast, H. Kennedy..... 369,342
Suspension device, Evarts & Fisher..... 369,509
Switch. See Railway switch.
Tablet, ornamental, E. C. Meeker..... 369,407
Tag, marking, S. Dancyger..... 369,321
Telegraph, printing, W. B. Wood..... 369,577
Telephone, F. C. Watkins..... 369,376
Telephone transmitter, F. C. Watkins..... 369,379
Thill couplings, anti-rattler for, S. J. Bingham, 369,427, 369,428
Thrashing machine, Thull, Jr., & Weber..... 369,570
Tie. See Railway tie.
Time recorder, A. Hooper..... 369,450
Toy, mechanical, F. J. & A. S. Totten..... 369,623
Transom lifter, G. W. Wright..... 369,626
Trap. See Sediment trap.
Tree protector, Rowe & Hetrick..... 369,616
Trucks, safety guard for railway, F. S. Tull..... 369,416
Truss, G. Reno..... 369,471
Truss, J. O. Stephens..... 369,566
Type writing machine, T. E. Enjalbert..... 369,401
Umbrella and cane, combined, C. E. Vail..... 369,374
Umbrellas, etc., retention device for, W. H. Belknap..... 369,387
Valve for water pipes, W. Kaiser..... 369,523
Valve, steam-actuated, M. Schultz..... 369,659
Valve, steam engine, C. C. Poole..... 369,552
Valve stems, supporting mechanism for, E. P. Monroe..... 369,358
Vegetable cutter, F. Wuest..... 369,673
Velocipede, J. M. Marlin..... 369,540, 369,541
Veneer drums, machine for forming, Godfrey & Halstead..... 369,638
Vignetter, H. Kuhn..... 369,453
Voting and recording apparatus for legislative bodies, B. S. Molyneux..... 369,608
Wagon block, log, L. Stewart..... 369,661
Wagon brake, C. V. Pugh..... 369,363
Wagon jack, J. W. Epperson..... 369,330
Wagon seats, constructing, J. Q. Flint..... 369,510
Washing machine, H. Bauerfeind..... 369,495
Washing machine, I. V. Montanye..... 369,609
Watch springs, apparatus for tempering, F. Sedgwick..... 369,560
Water closet valve, J. F. Bryant..... 369,629
Water meters, magnetic register connection for, Dietzman & Cressey..... 369,595
Weighing machine, automatic grain, Weber & Harrison..... 369,486
Well drill, expansion, W. S. Green..... 369,403
Well drilling machine, J. Imler..... 369,339
Well sinking machine, Walker & Lockwood..... 369,572
Wheel, G. A. Barton..... 369,579
Wheel, G. W. Howell..... 369,641
Wheel fender, P. Portois..... 369,553
Whiffletree, J. H. Woodard..... 369,625
Windmills, automatic regulator for, R. A. Reynolds..... 369,366
Windmills, automatic stop for, J. G. Chapman.... 369,587
Window, picture, or other frame, J. S. Ford..... 369,512
Wood, machine for cutting, bundling, and binding fire, F. Kingston..... 369,603
Wrench. See Pipe wrench.
Yoke and pole tip, neck, R. E. Lundin..... 369,606

DESIGNS.

Badge, N. Carman..... 17,678, 17,679
Bottle, T. W. Powell..... 17,700
Bottle, H. H. Warner..... 17,696
Button, etc., sleeve, J. W. Miller..... 17,691
Carpet, H. Hunt..... 17,681
Collar, lady's, M. Noulett..... 27,692
Costume, girl's, E. L. Jenkins..... 17,682
Oil cloth, C. T. & V. E. Meyer..... 17,683 to 17,690
Silver plate, ornamentation of, Berry & Beach..... 17,677
Skirt, walking, J. Shiels..... 17,695
Stove, heating, J. E. Reiffenstine..... 17,693
Type, font of printing, E. Lauschke..... 17,698, 17,699
Wagon bodies, corner post for, C. Coutant..... 17,697
Watch case, W. Hayes..... 17,680
Wrap, lady's, E. Roys..... 17,694

TRADE MARKS.

Brushes, toilet, Newman & Kinkele..... 14,738
Cars, stock, G. D. Burton..... 14,726
Chairs, folding reclining rocking, P. C. Lewis..... 14,737
Compound for the cure of liver and kidney complaints, C. R. Crow..... 14,727
Corn starch, Sleeper Starch Company..... 14,743
Cutlery, A. Field & Co..... 14,730
Deodorizers, L. S. Overton..... 14,739
Horse blankets and horse sheets, W. Ayres & Sons..... 14,722
Lamps, glass chimneys for kerosene or petroleum, Jones, McDuffee & Stratton..... 14,734
Liniment, F. C. Herrington..... 14,731
Medicine for malarial and kindred diseases, Kaskine Company..... 14,736
Musical instruments, wind, F. Besson & Co..... 14,724
Oilstones and whetstones, A. F. Pike Manufacturing Company..... 14,740
Pills, alterative and liver, J. H. Stout..... 14,745
Pottery for table use, Jones, McDuffee & Stratton. 14,735
Remedies for gonorrhea, Ragan & Jordan..... 14,741
Specific for bronchitis and laryngitis, Bronchocura Company..... 14,725
Starch, laundry, Sleeper Starch Company..... 14,742
Stoves, ranges, and heating furnaces, heating, cooking, gasoline, and oil, Smith & Anthony Stove Company..... 14,744
Watch movements which have been adjusted to heat, cold, isochronism, and position, E. Howard Watch & Clock Company..... 14,733
Watch movements which have not been adjusted, E. Howard Watch & Clock Company..... 14,732
Woolens, worsteds, overcoatings, cloakings, and dress goods, J. Behrens & Sons..... 14,723
Yarn, worsted and woolen, Davis, Marean & Co.... 14,728
Yeast cakes, Diamond Yeast Co..... 14,729

A Printed copy of the specifications and drawing of any patent in the foregoing list, also of any patent issued since 1866, will be furnished from this office for 25 cents. In ordering please state the number and date of the patent desired, and remit to Munn & Co., 361 Broadway, New York. We also furnish copies of patents granted prior to 1866; but at increased cost, as the specifications, not being printed, must be copied by hand.

Canadian Patents may now be obtained by the inventors for any of the inventions named in the foregoing list, provided they are simple, at a cost of $40 each. If complicated, the cost will be a little more. For full instructions address Munn & Co., 361 Broadway, New York. Other foreign patents may also be obtained.

Advertisements.


Inside Page, each insertion - - - 75 cents a line.
Back Page, each insertion - - - $1.00 a line.

The above are charges per agate line—about eight words per line. This notice shows the width of the line, and is set in agate type. Engravings may head advertisements at the same rate per agate line, by measurement, as the letter press. Advertisements must be received at publication office as early as Thursday morning to appear in next issue.

SEBASTIAN, MAY & CO'S
Improved Screw Cutting
LATHES Foot & Power
$60.
Drill Presses, Chucks, Drills, Dogs, and machinists' and amateurs' outfits. *Lathes on trial.* Catalogues mailed on application
165 W. 2d St., Cincinnati, O.

"MORAL: INSURE IN THE TRAVELERS."

The Draper Recording Thermometer.



This thermometer gives a permanent and continuous record in ink of the temperature. The chart indicating hours of the day and days of the week gives the degrees of temperature from 20° below zero to 110° above. All instruments are accurately adjusted and warranted. The record is easily read and absolutely correct. Sold by the leading instrument dealers and opticians throughout the United States and Canada, and by
The DRAPER MANUFACTURING CO.
Owners of the United States and foreign patents, 152 Front Street, New York.
Size 14x20 in. *Patented. Copyrighted.*

IRON AND STEEL ANALYSIS. A PAPER by J. J. Morgan, giving instructions for the estimation of graphite, silicon, sulphur, manganese, phosphorus and carbon in iron and steel. With 2 illustrations. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **603.** Price 10 cents. To be had at this office and from all newsdealers.

ARMOR-CLAD SHIP VICTORIA. DESCRIPTION of the vessel, account of the launch, and speech of Sir William Armstrong on the occasion. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **603.** Price 10 cents. To be had at this office and from all newsdealers.

EXCELLENT BLACK COPIES of *anything written* or *drawn* with *any* Pen (or Type Writer) by the Patent
AUTOCOPYIST Only equaled by Lithography. Specimens Free.
AUTOCOPYIST CO., 166 William Street, New York.

SYSTEMS OF DISTRIBUTION OF Electricity.—A lecture by Elihu Thomson, delivered in the Sibley College course. The series, multiple arc, series multiple and multiple series, accumulator and induction systems described, and their advantages and disadvantages discussed. With 18 figures. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **603.** Price 10 cents. To be had at this office, and from all newsdealers.

2d HAND MACHINERY Lists sent. N.Y. Machinery Depot, Bridge Store No. 16, Frankfort Street, N. Y.

HYDROGEN GAS, PROCESS AND APPARATUS for Producing.—By C. M. Tessié Du Motay. Full description of a process for producing hydrogen by the conversion of superheated steam carrying with it a certain amount of naphtha vapor or its equivalent, in the presence of highly heated lime. By means of the apparatus here described and illustrated, hydrogen gas can be continuously produced by the employment of two sets of superheaters and two converting furnaces, which can be alternately used. Illustrated with nine engravings. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **241.** Price 10 cents. To be had at this office and from all newsdealers.

WANTED—Agents to sell **PRATT'S PATENT BUTTON FASTENER.** Address PRATT MANUFACTURING CO., Boston, Mass.

ON VIRULENT DISEASES, AND ESPECIALLY on the Disease commonly called Chicken Cholera.—By M. Pasteur. An important paper in which are presented by the author certain new facts which throw an unexpected light on the problems raised by the study of virulent diseases; these facts having been ascertained by a recent careful investigation of the fearful poultry disease known as "Chicken Cholera," and the results of which investigation are herein given in detail. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **242.** Price 10 cents. To be had at this office and from all newsdealers.

THE CHEAPEST AND BEST
PHOTO ENGRAVING CO.
67 PARK PLACE, NEW YORK
ENGRAVING FOR ALL ILLUSTRATIVE AND ADVERTISING PURPOSES

SCIENTIFIC AMERICAN SUPPLEMENT. Any desired back number of the SCIENTIFIC AMERICAN SUPPLEMENT can be had at this office for 10 cents. Also to be had of newsdealers in all parts of the country.



INGERSOLL ROCK DRILL CO.,
10 PARK PLACE, NEW YORK.
Improved "Eclipse"
ROCK DRILLS,
For Mining, Tunneling, Shaft-Sinking, Quarrying, Submarine drilling, and for all kinds of rock excavation.
"Straight Line" AIR COMPRESSORS, Boilers, Steam and Horse Power Hoists, Electric Blasting Batteries and General Mining Machinery. Send for full descriptive Catalogue.

THE NEW TAY BRIDGE. ILLUSTRATION of brief description of this recently finished structure. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **602.** Price 10 cents each. To be had at this office, and from all newsdealers.



Print Your Own Cards!
Press $3. Circular size $8. Newspaper size $44
Type setting easy, printed directions. Send 2 stamps for list presses, type, etc., to factory.
KELSEY & CO., Meriden, Conn.

THE PLATTSMOUTH BRIDGE.—FULL description of the new and important railway bridge constructed over the Missouri River at Plattsmouth, Neb., from plans by Chief Engineer George S. Morison. Locomotion. General description. Foundations. Masonry. The superstructure. Viaducts. Deck spans. Channel spans. Steel. Floor. Illustrated with eight figures, showing: perspective view of bridge; vertical sections; caissons; piers; and map showing location of bridge. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **285.** Price 10 cents. To be had at this office and from all newsdealers. Another article (illustrated) on the same subject may be found in SUPPLEMENT, No. **271.** Price 10 cents.

CARE OF THE INSANE.—A PAPER BY H. Warner, M.D., Superintendent of the Illinois Southern Hospital for the Insane, detailing the results of an experiment having an important bearing on the problem as to the best means of caring for and treating the insane. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **321.** Price 10 cents. To be had at this office and from all newsdealers.

Syracuse Malleable Iron Works

ASTRONOMICAL REVELATIONS
in which the true physical causes of the precession of the equinoctial points; the apparent secular acceleration of the moon's mean motion; the decrease in the obliquity of the ecliptic; the apparent aberration of the stars; and the apparent nutation of the earth's axis; are now, for the first time, made known and explained. To which is added a theory of the physical nature of the fixed stars. Crown 8vo, 62 pages, half morocco, price, $2. EDWARD DEXTER, 1215 Broadway New York.

THE CONTAGION OF CONSUMPTION.—By James T. Whittaker, M.D. An interesting discussion of the specificity of the tuberculous virus. The views of the older writers. The insight obtained into the nature of tuberculosis in modern times through scientific experimentation. The close analogies between tuberculosis and syphilis. The symptoms of each. No such thing as predisposition to either disease. Both may be inherited, yet in majority of cases are acquired. Various ways in which tuberculosis may be acquired by those in whom it is not hereditary. The future outlook for the therapy of the disease. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **243.** Price 10 cents. To be had at this office and from all newsdealers.

2000 Fine Black copies of Writing, Drawing, Music.
FAST AUTOMATIC COPIER Works automatically with wonderful precision and rapidity.
FAST AUTOMATIC CO., 2 New Chambers St, N. Y.

Valuable Patent For Sale.
The Adjustable School Seat and Settee, illustrated on page 194. Will sell State rights or entire patent. Address R. RICHARDI, P. O. Box 773, New York.

WELL Encyclopedia of 700 Engravings of WELL TOOLS. **EL** Diamond Drills and Lightning Hydraulic WELL Machines **L** Book free, 25c. for mailing it. American Well Works, Aurora, Ill.

PANAMA CANAL.—A PAPER BY DR. W. Nelson on some of the difficulties to be overcome in the prosecution of this work. Damming the Chagres River. Extent of the earth cutting. Ocean tides. The climate. Prevalent diseases. Cost of the canal in lives. Cost of the work. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **603.** Price 10 cents. To be had at this office and from all newsdealers.

WORTH KNOWING For 38 cents, agents' terms, and a **440-page cloth book,** postpaid, containing a **million facts** and 50 full-page colored maps. Agents wanted everywhere. G. Ogilvie, 216 Lake St., Chicago, Ill.


THEORY OF UNITS. BY G. SZARvady.—Measurement of a magnitude. Equations between concrete magnitudes. Absolute units. History of the C. G. S. system. Fundamental and derived units. Geometrical, Mechanical and Electric units. Criticism of the C. G. S. system. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **606.** Price 10 cents. To be had at this office and from all newsdealers.

PRINTED ENVELOPES.
Our **Special Facilities** enable us to produce **fine** Cut work. Note, Letter and Bill Heads at Low Prices.
American Mfg. Co. Charlton, Mass.

GOVERNMENT BREEDING FARM FOR Cavalry Horses. A paper by Lieut. S. C. Robertson, U. S. A., outlining a plan for the establishment of a breeding farm for horses maintained and controlled by the government, and discussing the economic features of the scheme. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **606.** Price 10 cents. To be had at this office and from all newsdealers.

CATALOGUES FREE TO ANY ADDRESS
GEARS AND PARTS OF MODELS
GOODNOW & WIGHTMAN BOSTON

SEWAGE DISPOSAL. BY JAMES Craggs. A condensed but clear description of the plan of sewage and sewer disposal adopted for the Sheldon and East Thickly Local District. Description of main drain, subsiding tanks, under drainage, and surface preparation. A valuable paper, showing one of the best, most effective, and most economical methods of sewerage and drainage for towns and villages. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **257.** Price 10 cents. To be had at this office and from all newsdealers.



STEAM ENGINES.
Horizontal and Vertical.
Dredging Machinery, Flour, Powder, Slate and Flint Mill Machinery, Turbine Water Wheels.
York Mfg Co., York, Pa. U. S. A.

CHEMISTRY OF BUILDING MATERIALS. The bearings of chemical science on certain prominent materials used for building purposes, such as stones, limes, mortars, cements, brick, marble, etc. I. A brief account of the general principles of chemistry. The chemical substances which enter into the composition of the above-named materials, their characteristics, and directions for ascertaining their presence in any mineral. 2. Examination in detail of the several varieties of stone found in the earth, both as regards the proportions of their constituents, and their chemical and other properties. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **279.** Price 10 cents. To be had at this office and from all newsdealers.

ELECTRIC LICHT AND POWER.
Edco System of Arc and Incandescent Lighting. Direct or in connection with the Storage Batteries of the Electrical Accumulator Co.
Dynamos, Motors, Lamps, Batteries, and General Electrical Supplies.
Electro-Dynamic Company, 224 Carter St., Philadelphia.

© 1887 SCIENTIFIC AMERICAN, INC.

SOME CHOICE TECHNICAL BOOKS.

ANDRES.—A Practical Treatise on the Fabrication of Volatile and Fat Varnishes, Lacquers, Siccatives, and Sealing Waxes. Edited by Wm. T. Brannt. Illustrated. 346 pages. 12mo, ... $2.50

BIRD.—The American Practical Dyer's Companion, embracing over 800 receipts, accompanied by 170 dyed samples of Raw Materials and Fabrics. By F. J. Bird, Practical Dyer. 388 pages. 8vo, . . $10.00

BRANNT.—A Practical Treatise on the Raw Materials and the Distillation and Rectification of Alcohol, and the Preparation of Alcoholic Liquors, Liqueurs, Cordials, and Bitters. 31 engravings. 330 pages. 12mo, $2.50.

BRANNT.—A Practical Treatise on Animal and Vegetable Fats and Oils: comprising both Fixed and Volatile Oils, their Physical and Chemical Properties, the manner of extracting and refining them, and Practical Rules for Testing them; as well as the manufacture of Artificial Butter, Lubricants, etc. Edited chiefly from the German. By Wm. T. Brannt. Illustrated by numerous engravings. About 600 pages. 8vo. (In press.)

CREW.—A Practical Treatise on Petroleum. By Benjamin J. Crew. With an appendix on the Oil Regions and the Geology of Natural Gas. By Chas. A. Ashburner, Geologist in charge Pennsylvania Survey. Illustrated by 70 engravings and 2 plates. 508 pages. 8vo, ... $4.50

CRISTIANI.—A Technical Treatise on Soap and Candles, with a Glance at the Industry of Fats and Oils. Illustrated by 176 engravings. 581 pages. 8vo, $7.50

CRISTIANI.—Perfumery and kindred Arts. 398 pages. 8vo, ... $5.00

☞ *The above or any of our Books sent by mail free of Postage, at the publication prices, to any address in the world.*

☞ *Our New and Revised Catalogue of Practical and Scientific Books, 80 pages, 8 vo, and our other Catalogues and circulars, the whole covering every branch of Science applied to the Arts, sent free and free of postage to any one in any part of the world who will furnish his address.*

HENRY CAREY BAIRD & CO.,
INDUSTRIAL PUBLISHERS, BOOKSELLERS & IMPORTERS
810 Walnut St., Philadelphia, Pa., U. S. A.

LOCALIZATION IN THE CORTEX Cerebri. A paper by L. C. Gray, M.D., discussing the present state of our knowledge concerning cortical localization. With 7 figures. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **606.** Price 10 cents. To be had at this office and from all newsdealers.

AGENTS WANTED (Samples FREE) for Dr. Scott's beautiful Electric Corsets, Brushes, Belts, Etc. No risk, quick sales. Territory given, satisfaction guaranteed. **DR. SCOTT, 843 Broadway, N. Y.**

International Exhibition

OF

INDUSTRY, SCIENCE, and ART,

KELVINGROVE PARK, GLASGOW, 1888.

Patron Her Most Gracious Majesty the Queen.
Honorary President His Royal Highness the Prince of Wales, K. G., K. T.

President, Sir Archibald C. Campbell of Blytheswood, Baronet, M.P.; Chairman of Executive Council. The Honorable Sir James King of Campsie, LL.D., Lord Provost of Glasgow; Secretary, Wm. M. Cunningham; General Manager, H. A. Hedley.

The classification includes Agriculture, Horticulture, and Arboriculture, Mining, Civil Engineering, Naval Architecture and Engineering, Machinery of all kinds, Railway Plant and Road Carriages, Chemistry and Allied Industries, Food and Drink, Industrial Design and Manufactures, Education and Music. Fine Arts—Women's Industries Section. Artisan Section—Power, Steam, Gas, and Water free.

The building and grounds cover sixty acres. Application for space must be made before November 1, 1887.

Offices—27 St. Vincent Place, Glasgow.

Prospectuses and application forms can be obtained from A. MacCorkindale, Mutual Life Insurance Co., 32 Nassau Street, New York.

Arrangements have been made with the State Steamship Company, the Anchor Line, the Allan Line, and the Cunard Line for the carriage of exhibits at special terms to and from Glasgow.

The city of Glasgow is the second largest city in the British Isles, and the main starting point for the Tourists' route to the Highlands of Scotland.

DIPHTHERIA.—A PAPER BY DR. Carl Bunsen, giving the results of his microscopical researches into the cause, origin and propagation of this dread disease. With 9 figures. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **607.** Price 10 cents. To be had at this office and from all newsdealers.



Steam, Air and Gas pumps of improved construction, requiring about 2 h.p. to run and delivering cool air. Direct acting up to 400 lbs. Geared up to 1,500 lbs. Blowing engines up to 40 cubic feet per minute. Vacuum pumps. Hand flywheel air pumps. Horizontal lever air and gas pumps. Steady blast power pumps, etc. Pumps run by hydrant pressure, etc. Address

H. WEINDEL,
Manufacturer and Designer,
313 Branch Ave., Phila., Pa.

FOUCAULT'S CURRENTS. A PAPER by Dr. A. Von Waltenhofen, describing a new apparatus for the production of Foucault's currents. With 3 figures. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **605.** Price 10 cents. To be had at this office and from all newsdealers.

Barnes' Pat. Foot & Hand Power MACHINERY, $15.



Contractors and Builders, Cabinet Makers and Jobbers in Wood or Metal, who have no steam power, can, by using outfits of these machines, bid lower and save more money than by any other means for doing their work. Sold on trial. Illustrated Catalogue FREE.

W. F. & JOHN BARNES CO.,
Address 1999 Ruby St., Rockford, Ill.

ASPHALTUM AND THE PITCH LAKE of Trinidad. By W. O. Crosby.—Origin of bitumens, Asphaltum, where found. The pitch lake of Trinidad. How the pitch is quarried. Origin of the lake. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **605.** Price 10 cents. To be had at this office and from all newsdealers.

To Business Men.

The value of the SCIENTIFIC AMERICAN as an advertising medium cannot be overestimated. Its circulation is many times greater than that of any similar journal now published. It goes into all the States and Territories, and is read in all the principal libraries and reading rooms of the world. A business man wants something more than to see his advertisement in a printed newspaper. He wants circulation. This he has when he advertises in the SCIENTIFIC AMERICAN. And do not let the advertising agent influence you to substitute some other paper for the SCIENTIFIC AMERICAN, when selecting a list of publications in which you decide it is for your interest to advertise. This is frequently done, for the reason that the agent gets a larger commission from the papers having a small circulation than is allowed on the SCIENTIFIC AMERICAN.


For rates see top of first column of this page, or address

MUNN & CO., Publishers,
361 Broadway, New York.

WEBSTER'S UNABRIDGED DICTIONARY.

With or without Patent Index.

The best practical English Dictionary extant.—Quarterly Review, London.



It has 3000 more Words than any other Am. Dict'y, and nearly 3 times the number of Engravings. "It is an ever-present and reliable School-master to the whole family."

The latest issue of this work comprises

A DICTIONARY
containing 118,000 Words, and 3000 Engravings,
A GAZETTEER OF THE WORLD
25,000 Titles, with pronunciation, &c., (recently added) and
A BIOGRAPHICAL DICTIONARY
nearly 10,000 Noted Persons; also various Tables,
ALL IN ONE BOOK.

Webster is **Standard Authority** in the **Government Printing Office** and with the **U. S. Supreme Court,** and is recommended by the **State Sup'ts of Schools in 36 States,** and by the leading **College Presidents.**


Published by G. & C. MERRIAM & CO., Springfield, Mass.

The World's Ash Sifter is the only one made that has a self-dumping cylinder which sifts without dust, and dumps the coal and ashes in separate boxes without opening. It has not a spring, or slide, or complication of any kind to get out of order, and with ordinary care will last for years. *Patent for sale.*
W. T. ADAMS, House of Refuge, Baltimore, Md,

DYNAMO-ELECTRIC MACHINES.—A study of the leading types of these apparatus. Illustrated with 13 engravings. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **604.** Price 10 cents. To be had at this office and from all newsdealers.

MALLEABLE AND FINE GRAY IRON ALSO STEEL CASTINGS FROM SPECIAL PATTERNS. FINE TINNING, JAPANNING AND FINISHING. THOMAS DEVLIN & CO. LEHIGH AVE. & AMERICAN ST. PHILA.

PRESERVATION OF RAILWAY TIES and Timber by the use of Antiseptics. A paper by J. P. Card describing the method of treating wood by the zinc-creosote process, and giving an account of some of the results reached by the use of it. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **607.** Price 10 cents. To be had at this office and from all newsdealers.




BIBB'S Celebrated Original **BALTIMORE FIRE-PLACE HEATERS**
To warm upper and lower rooms
The Handsomest and Most Economical Coal Stoves in the world.
B. C. BIBB & SON
Stove Founders, Baltimore, Md.
MARBLEIZED SLATE MANTELS
New and Beautiful Designs.

WATERBURY MALLEABLE IRON COMPANY, WATERBURY, CONN.
MALLEABLE AND GRAY IRON CASTINGS.
FITTINGS for STEAM, GAS & WATER.


SOME OF THE CONDITIONS AFFECTING the Distribution of Micro-organisms in the Atmosphere.—A lecture by Percy F. Frankland, Ph.D. Pasteur's experiments. Tyndall's experiments. Miquel and Freudenreich's experiments. Solid cultivating media. Hesse's method. Micro-organisms at different altitudes. Micro-organisms in sea-air and in the air of buildings. Late improvements in apparatus and methods. With one figure. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **604.** Price 10 cents. To be had at this office and from all newsdealers.

MAGIC LANTERNS.
OUR PETROLEUM LANTERNS HAVE THE FINEST LENSES AND THE LAMPS ARE UNRIVALLED FOR POWERFUL WHITE LIGHT.
CHOICE STOCK OF VIEWS, COLORED AND PLAIN.
SEND FOR CATALOGUE TO
QUEEN & CO. PHILADELPHIA PA.




WEITMYER PATENT FURNACE
BOILERS OF EVERY DESCRIPTION.
IDE Automatic Engines, Traction and Portable Engines
STEAM ROAD ROLLERS.
Manufactured by Foundry and Machine Department,
Harrisburg, Pa., U. S. A.






Section of **Copper-Wire-Sewed Light Double Belting,** specially adapted to use on cone pulleys and other hard places. Manufactured by the **PAGE BELTING CO., Concord, N. H.** Also manufacturers of Staple and Special Grades of Leather Belting and the **"HERCULES"** Lacing. ☞ Send for Catalogue No. 23. ☜




To Skate Manufacturers.
Patents No. 286,199 and 287,198 are for sale. Correspondence solicited. Address
R. C. HINDLEY, Racine, Wis.

LEO XIII. BIOGRAPHICAL SKETCH of the reigning pope. With portrait. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **604.** Price 10 cents. To be had at this office and from all newsdealers



The most successful Lubricator for Loose Pulleys in use.
VAN DUZEN'S PATENT LOOSE PULLEY OILER.
Highly recommended by those who have used them for the past two years. Prices very reasonable. Every user of machinery should have our "Catalogue No. 55;" sent free.
VAN DUZEN & TIFT, Cincinnati, O.

INDUSTRIAL EDUCATION, A NEW Feature in. A description of the new system of hand education adopted by the Society for Ethical Culture in the instruction of young children in the principles underlying all mechanical arts and occupations; an improvement on the well known Russian system. With fifteen diagrams showing the mode of instruction in the carving of geometrical figures in clay. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **230.** Price 10 cents. To be had at this office and from all newsdealers.



SUPERIOR Stationary Engines with Plain and Automatic Cut-off. Vertical and Horizontal.
Penna. Diamond Drill Co.,
Birdsboro, Pa.

PERFECT
NEWSPAPER FILE

The Koch Patent File, for preserving newspapers, magazines, and pamphlets, has been recently improved and price reduced. Subscribers to the SCIENTIFIC AMERICAN and SCIENTIFIC AMERICAN SUPPLEMENT can be supplied for the low price of $1.50 by mail, or $1.25 at the office of this paper. Heavy board sides; inscription "SCIENTIFIC AMERICAN," in gilt. Necessary for every one who wishes to preserve the paper.
Address
MUNN & CO.,
Publishers SCIENTIFIC AMERICAN.

AERIAL VORTICES.—AN ACCOUNT OF the experiments of Mr. Chas. Weyher with a view to elucidating the question of the formation of waterspouts, whirlwinds, and hail. Illustrated with 9 engravings. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **605.** Price 10 cents. To be had at this office and from all newsdealers.




CHANDLER & FARQUHAR
177 Washington St.,
BOSTON.
New England Agents for
BARNES' FOOT POWER MACHINERY
AND DEALERS IN
Machinists' Supplies of Every Kind
Send two stamps for illus. catalogue.

FIFTY YEARS' PROGRESS IN TELEgraphy.—By W. H. Preece, F.R.S. An interesting historical paper. Improvements in apparatus. Telephones, Pneumatic telegraphs, Cables, Railway telegraphs. Capital invested in telegraphs. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **607.** Price 10 cents. To be had at this office, and from all newsdealers.

PLAYS Dialogues, Tableaux, Speakers, for School, Club & Parlor. Best out. Catalogue free. T. S. DENISON, Chicago, Ill.

THE GREAT TOWER AT PARIS.—Description, by Mr. Eiffel, of the mode of construction of the foundations of the great 984 foot tower. With two illustrations showing sections of the caissons. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **607.** Price 10 cents. To be had at this office and from all newsdealers.

Telegraph and Electrical SUPPLIES
Medical Batteries, Inventors' Models, Experimental Work, and fine brass castings. Send for catalogue **C. E. JONES & BRO. Cincinnati, O.**
It is important to us that you mention this paper.



THE BARAGWANATH STEAM JACKET Feedwater Boiler and Purifier.
Boils the feedwater. Keeps the boiler clean. Saves boiler repairs. Saves from 15 to 40 per cent. of fuel. Large heating surface. No radiating surface. No back pressure. Thoroughly utilizes the exhaust. Strong and durable. Over 5,000 in use. Send for circular.
WM. BARAGWANATH & SON, 40 West Division Street, Chicago, Ill.
JAS. B. CROUTHERS, M. E., General Eastern Manager, 112 Liberty Street, New York.

The New Catalogue of Valuable Papers
contained in SCIENTIFIC AMERICAN SUPPLEMENT, sent *free of charge* to any address.
MUNN & CO., 361 Broadway, N. Y.

Shafting and Gearing, Textile Machinery, **ELEVATORS, ETC.** | **THOS. WOOD & CO. 22d and Wood Sts., Philadelphia, Pa.**

SHAFTING DEPARTMENT Couplings, Hangers, Shafting, Pulleys.
EDISON MACHINE WORKS. SEND FOR CATALOGUE. **Salesroom 19 DEY STREET New York.**

ICE & REFRIGERATING Machines. York Patent. **YORK MFG. CO., York, Pa.**

Proposals for three Overhead Travelling Cranes complete, three Supports for such Cranes, and one Iron Frame for a Building.

NAVY DEPARTMENT.
WASHINGTON, *July* 24, 1887.

Sealed proposals will be received at the Navy Department, Washington, D. C., until 12 o'clock noon, on Thursday, the 15th day of September, 1887, at which time and place they will be opened in the presence of bidders, for furnishing the necessary material and labor and constructing, delivering and erecting the iron work for the supports of three overhead travelling cranes, the frame of one building, and three overhead travelling cranes complete, including attachments pertaining thereto, for the Ordnance Gun-shops at the Navy Yard, Washington, D. C., in accordance with plans which may be seen, and specifications, copies of which, together with all other information essential to bidders, may be obtained at the Office of the Civil Engineer at said Navy Yard. Proposals must be made in accordance with forms which will also be furnished on application to that office.

Proposals must be made in duplicate and enclosed in envelopes marked "Proposals for Overhead Travelling Cranes complete, for Iron Supports for such Cranes, and Iron Frame for a Building," and addressed to the Secretary of the Navy, Navy Department, Washington, D. C.

The Secretary of the Navy reserves the right to reject any or all bids, as, in his judgment, the interests of the Government may require.

WILLIAM C. WHITNEY,
Secretary of the Navy.

NAVY DEPARTMENT,
WASHINGTON, *September* 12, 1887.

The time for receiving proposals under the foregoing advertisement is hereby extended until Tuesday, the 1st day of November, 1887, at 12 o'clock noon, at which time the bids will be opened.

JOHN G. WALKER,
Acting Secretary of the Navy.

Proposals for Steel Gun-Forgings for the Navy.

NAVY DEPARTMENT,
WASHINGTON, *August* 13, 1887.

Sealed proposals, from domestic manufacturers of steel, to furnish twenty-two sets of steel forgings for 6-inch B. L. rifle guns, all oil-treated, annealed, and in accordance with drawings and specifications prepared in the Bureau of Ordnance, will be received at the Navy Department until Tuesday, the 27th day of September, 1887, at 12 o clock, noon, at which time the proposals will be opened.

The kinds of forgings required and the estimated quantities of each (aggregating about one hundred and thirty-six tons), are set forth in the specifications, which, together with blank forms of proposals and of contract, and copies of the drawings and any other information desired, can be obtained on application to the Bureau of Ordnance, Navy Department.

The contract will be awarded for the forgings as a whole. No proposal for less than the whole will be entertained, nor will any proposal be considered unless accompanied by satisfactory evidence that the bidder is in possession of a plant adequate to the production and delivery of the required forgings. All the forgings delivered under the contract must conform in material, manufacture, and quality to the aforesaid drawings and specifications, and must successfuly pass the required inspection and tests.

The successful bidder will be required, within ten days after notice of award, to enter into a formal contract binding himself to deliver one set of gun-forgings not later than December 31, 1887, and not less than one set every twenty-one days thereafter, and to complete the deliveries within fifteen months from the date of the contract. A bond, in a penal sum equal to 15 per cent. of the total contract price, must accompany the contract.

Each proposal must be accompanied by a certified check, payable to the order of the Secretary of the Navy, in an amount not less than 5 per cent. of the total amount of the bid. Checks of unsuccessful bidders will be returned within five days after the bids are opened. The check of the successful bidder will be returned when he shall have executed the formal contract and furnished the requisite bond. In case of his failure to comply with this stipulation, the check will become the property of the United States.

All proposals must be in duplicate, enclosed in envelopes marked "Proposal for Steel Gun-Forgings," and addressed to the Secretary of the Navy, Navy Department, Washington, D. C.

The right is reserved to waive defects in form and to reject any or all bids.

WILLIAM C. WHITNEY,
Secretary of the Navy.

SCIENTIFIC BOOK CATALOGUE,
JUST PUBLISHED.

Our new catalogue containing over 100 pages, including works on more than fifty different subjects. Will be mailed free to any address on application.

MUNN & CO., Publishers Scientific American,
361 Broadway, New York.


THE FLIGHT OF BIRDS.—BY A. C. Campbell. An interesting paper, in which the author explains the structure of the bird's wing, and the mechanical principles involved in flight, and from thence shows how the bird contrives to sustain itself against gravity and to acquire any desired speed. Illustrated with 7 cuts. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **298.** Price 10 cents. To be had at this office and from all newsdealers.

CHARTER'S GAS ENGINE.

The safest, most reliable and economical Motor in existence.

Independent of Gas Works and Machines.

2 to 25 H. P.



So it can be used *anywhere.*

Makes Its Own Gas
AT COST OF ABOUT
65 cents per M Feet.

A Saving of 25 to 85 per cent guaranteed over all other Gas Engines.

Chicago Agent: H. H. LATHAM, 42 Dearborn Street.
New York House: 12 Cortlandt Street.

Williams & Orton Mfg. Co.
P. O. Box 148. STERLING, ILL.


SEVERN AND MERSEY TUNNELS. Full description of these two important engineering works, with two engravings. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **604.** Price 10 cents. To be had at this office and from all newsdealers.

CATARRH positively cured by the great German Remedy. Sample pkge. and book for 4cts. in stamps. **E. H. MEDICAL CO.,** East Hampton, Conn.

CONSUMPTION, throat and bronchial troubles **Cured** A late discovery. Sample bottles free with treatise containing directions for home treatment. Give express office.
DR. WM. F. G. NOETLING & CO., East Hampton, Conn.

Deafness Cured.
By using the invention of a **DEAF MAN** by which he cured himself. No case of failure yet reported. Send for circular and particulars to
B. N. HUESTIS EAR DRUM CO.,
6 East 14th St., New York.

DYKE'S BEARD ELIXIR. 12 PKGS. $1. 4 FOR 50 CTS. BY MAIL. Every Pkg. warranted $1 size. Forces heavy moustache, whiskers or hair on bald heads in 20 to 30 days. The only Remedy; 2 or 3 Pkgs. does the work. We prove it or pay $100. You make $6, day. No experience. 12 Dollar Pkgs. sealed, $1, or 4 30c. in stamps. No fees. Smith Remedy Co. Palatine, Ills.



CURE FOR THE DEAF
PECK'S PATENT IMPROVED CUSHIONED EAR DRUMS Perfectly Restore the Hearing, and perform the work of the natural drum. Invisible, comfortable and always in position. All conversation and even whispers heard distinctly. Send for illustrated book with testimonials, FREE. Address or call on F. HISCOX, 853 Broadway, New York. Mention this paper.

ELECTRICAL. Edward P. Thompson, Solicitor of Electrical Patents, 3 Beekman Street, N. Y. Write for testimonials and instructions.

© 1887 SCIENTIFIC AMERICAN, INC.

Advertisements.

Inside Page, each insertion - - - 75 cents a line.
Back Page, each insertion - - - $1.00 a line.

The above are charges per agate line—about eight words per line. This notice shows the width of the line, and is set in agate type. Engravings may head advertisements at the same rate per agate line, by measurement, as the letter press. Advertisements must be received at publication office as early as Thursday morning to appear in next issue.

56th
ANNUAL EXHIBITION
OF THE
AMERICAN INSTITUTE
OF THE CITY OF NEW YORK.
Will open to the Public September 28th
ELECTRICAL INVENTIONS
Will have precedence, and form its most attractive feature. Exhibitors in this department should address JOSEPH WETZLER, 175 Potter Building, New York. Other departments and all details to GENERAL SUPERINTENDENT, American Institute, Astor Place, N. Y.

ANTOINE LAURENT LAVOISIER.—Sketch of the life of this eminent French chemist; with a translation of a hitherto unpublished letter from him to Black, the great English investigator. With a portrait. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **603.** Price 10 cents. To be had at this office and from all newsdealers.

Steam! Steam!
We build Automatic Engines from 2 to 200 H. P., equal to anything in market.
A Large Lot of 2, 3 and 4-H. Engines
With or without boilers, **low for cash.**
B. W. PAYNE & SONS,
Box 15, Elmira, N. Y.


For Sale or to Let.—Factory Building, 32 ft. by 144 ft., two stories and attic high, with one acre of ground, including running stream. Twenty-five horse-power engine and boiler, shafting, pulleys, hangers, belting, piping, etc. Two railroads. Owner will take interest in well established business. Address PLANT, P. O. Box 773, New York City.



The Caligraph.
LIFE IS TOO SHORT TO WRITE OLD WAY
Address: The American Writing Machine Co., Hartford, Conn.; New York Office, 237 Broadway.

THE COPYING PAD.—HOW TO MAKE and how to use; with an engraving. Practical directions how to prepare the gelatine pad, and also the aniline ink by which the copies are made; how to apply the written letter to the pad; how to take off copies of the letter. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **438.** Price 10 cents. For sale at this office and by all newsdealers in all parts of the country.

USEFUL BOOKS.
Manufacturers, Agriculturists, Chemists, Engineers, Mechanics, Builders, men of leisure, and professional men, of all classes, need good books in the line of their respective callings. Our post office department permits the transmission of books through the mails at very small cost. A comprehensive catalogue of useful books by different authors, on more than fifty different subjects, has just been published for free circulation at the office of this paper. Subjects classified with names of author. Persons desiring a copy, have only to ask for it, and it will be mailed to them. Address,
MUNN & CO., 361 Broadway, New York.

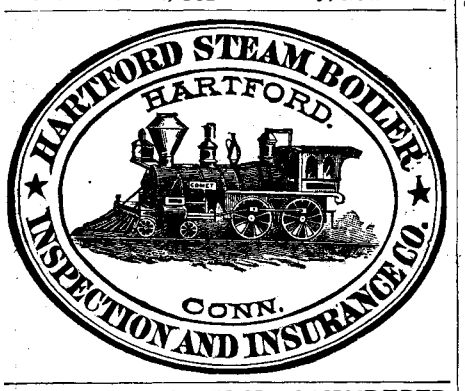

TECHNICAL TRAINING CONSIDERED as a part of a "Complete and Generous Education." An address by Dr. R. H. Thurston, delivered at the seventeenth annual commencement of the Worcester Polytechnic Institute. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **602.** Price 10 cents. To be had at this office and from all newsdealers.

SEAMLESS BRASS & COPPER TUBES. FINE TOOLS, TAPS, DIES. SEND FOR CATALOGUE. 175-177 LAKE ST. CHICAGO. SHEET BRASS. BRASS WIRE
Mention this paper.

PATENTS.
MESSRS. MUNN & CO., in connection with the publication of the SCIENTIFIC AMERICAN, continue to examine improvements, and to act as Solicitors of Patents for Inventors.

In this line of business they have had *forty-one years' experience*, and now have *unequaled facilities* for the preparation of Patent Drawings, Specifications, and the prosecution of Applications for Patents in the United States, Canada, and Foreign Countries. Messrs Munn & Co. also attend to the preparation of Caveats, Copyrights for Books, Labels, Reissues, Assignments, and Reports on Infringements of Patents. All business intrusted to them is done with special care and promptness, on very reasonable terms

A pamphlet sent free of charge, on application, containing full information about Patents and how to procure them; directions concerning Labels, Copyrights, Designs, Patents, Appeals, Reissues, Infringements, Assignments, Rejected Cases, Hints on the Sale of Patents, etc.

We also send, *free of charge*, a Synopsis of Foreign Patent Laws, showing the cost and method of securing patents in all the principal countries of the world.

MUNN & CO., Solicitors of Patents,
361 Broadway, New York.

BRANCH OFFICES.—No. 622 and 624 F Street, Pacific Building, near 7th Street, Washington, D. C.

New York Belting & Packing Co.
Manufacturers of
Vulcanized Rubber
No. 15 Park Row, ... New York.

Sole Manufacturers of
AIR BRAKE HOSE,
— FOR THE —
Westinghouse Air Brake Company,
— FOR —
AMERICA AND EUROPE.

Pickhuben No. 5 (Freihafengebiet,) *HAMBURG, GERMANY.*

H. W. JOHNS
PRICE REDUCED.
ASBESTOS ROOFING
FIRE AND WATER-PROOF BUILDING FELT, FIRE-PROOF PAINTS, STEAM PACKINGS, BOILER COVERINGS, ETC.
Samples and descriptive Price List free by mail.
H. W. JOHNS M'F'G CO., 87 MAIDEN LANE, N. Y.


TANNIN. ITS PRESENT AND FUTURE Sources. A lecture by Prof. Henry Trimble, giving a very comprehensive treatment of the subject. Contained in SCIENTIFIC AMERICAN SUPPLEMENT No. **602.** Price 10 cents. To be had at this office and from all newsdealers.

MAGIC LANTERNS
And **STEREOPTICONS**, all prices. Views illustrating every subject for **PUBLIC EXHIBITIONS**, etc. ☞ *A profitable business for a man with small capital.* Also Lanterns for Home Amusement. 152 page Catalogue *free.*
McALLISTER, Optician, **49 Nassau St., N. Y.**

BRICKS AND BRICKWORK. A PAPER by Prof. T. Roger Smith, F.R.I.B.A., giving an interesting historical account of the art of making bricks, and a description of the various kinds of bricks and the mode of manufacture, and various methods of laying them. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **601.** Price 10 cents. To be had at this office and from all newsdealers.

$10.00 to $50.00 per night. A light and profitable business. **Magic Lanterns and Views** of popular subjects. Catalogues on application. Part 1 Optical, 2 Mathematical, 3 Meteorological, 4 Magic Lanterns, etc.
L. MANASSE, 88 Madison Street, Chicago, Ill.

HENDON SEWAGE WORKS. DESCRIPTION of a new plant for the treatment of sewage by filtration, and precipitation of the organic matters by lime. With 3 illustrations. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **602.** Price 10 cents. To be had at this office and from all newsdealers.


WITHERBY, RUGG & RICHARDSON, Manufacturers of Patent Wood Working Machinery of every description. Facilities unsurpassed. Shop formerly occupied by R. Ball & Co., Worcester, Mass. Send for Catalogue.

WHAT AMERICAN ZOOLOGISTS HAVE Done for Evolution. By Edward S. Morse. Address of the retiring president of the American Association for the Advancement of Science, New York, Aug. 11, 1887. An interesting review of ten years' work performed by American Zoologists. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, Nos. **607** and **608.** Price 10 cents each. To be had at this office and from all newsdealers.

WE MANUFACTURE
WELL DRILLS
FOR
Water, Coal and Gas,
Hydraulic or Jetting.
Largest Stock in America. Farmers with small outlay (*experience unnecessary*), Can make large profits. No risks. Can direct buyers to paying territory. Prospecting for Water, Coal or Gas done on application. Also M'f's of WIND MILLS, HORSE POWERS, FEED MILLS, FODDER AND ENSILAGE CUTTERS, PUMPS AND WELL SUPPLIES. Mention this Paper. Send 14c. to cover cost mailing Catalogue.
CHICAGO TUBULAR WELL WORKS.
68 W. Lake St., Chicago, Ill.

SAWS Wanted 50,000 Sawyers and Lumbermen to send us their full address for a copy of Emerson's Book of **SAWS**. We are first to introduce NATURAL GAS for heating and tempering **Saws** with wonderful effect upon improving their quality and toughness, enabling us to reduce prices. Address **SAWS**
EMERSON, SMITH & CO. (Ltd.), Beaver Falls, Pa.


CEO. W. MARBLE, Sole Manufacturer of THE ACME WRENCH.
The best made, all steel, and warranted, 8 sizes.
28 to 32 South Canal Street, Chicago, U. S. A

WIRE ROPE
Address JOHN A. ROEBLING'S SONS, Manufacturers, Trenton, N. J., or 117 Liberty Street, New York.
Wheels and Rope for conveying power long distances. Send for circular.


STEAM PUMPS for Hot or Cold, Fresh or Salt Water; for Oils, Naphtha, Tar; for Cane Juice, Liquors, Syrups, Scum; for Ammonia, Alkalies, Extracts, Acids; for Thick, Volatile, Viscous or Foul Liquids, etc. Vacuum Pumps of the highest efficiency. Filter Press Pumps. Air, Gas and Acid Blowers. Air Compressors. Etc.
BUILT BY **GUILD & GARRISON, Brooklyn, N. Y.**


POINTERS for Users of Steam Pumps.
Van Duzen's Patent Steam Pump
Can Pump { Hot or Cold, / Sandy or Impure, / Water or Liquids } Is Efficient.
Has no moving parts, consequently no wear, no repairs, no trouble. Purchasers assume no risks, as we guarantee every Pump. Above comparison with Jet Pumps, Ejectors, etc., made of Iron. Demand this Pump of your dealer and take no cheap substitute. We make Ten Sizes. Prices from $7 to $75. Capacities from 100 to 20,000 gallons per hour. State for what purpose wanted and send for Catalogue of "Pumps."
VAN DUZEN & TIFT, Cincinnati, O.

HARRISON CONVEYOR.
HARRISON CONVEYOR!
For Handling **Grain, Coal, Sand, Clay, Tan Bark, Cinders, Ores, Seeds, &c.**
Send for Circulars. **BORDEN, SELLECK & CO.,** { Sole Manu'fers, } **Chicago, Ill.**

PULLEYS, HANGERS, FRICTION CLUTCHES. PROGRESS MACHINE WORKS, A. & F. BROWN, **44 Park Place, N. Y.**

IMITATION
AN ACKNOWLEDGMENT OF SUPERIORITY.
The best evidence that the JENKINS BROS. VALVES, JENKINS STANDARD PACKING, and JENKINS DISCS have extraordinary merit, and are held in high esteem by the public, is that they are being *imitated* and *counterfeited*. The imitations resemble the original in appearance only; they lack the general excellence of the genuine. Our friends and customers will sustain us in our endeavor to manufacture the best goods, by not accepting any goods unless stamped as above. This notice has become necessary by the fraudulent use of our name, and to protect the public from being deceived—by unprincipled parties placing imitations on the market.
JENKINS BROS., 71 John St., N. Y.; 105 Milk St., Boston; 13 So. Fourth St., Phila.; 54 Dearborn St., Chica o.


GAS ENGINES.
Best in principle, workmanship, and materials.
An unequaled small Motor adapted to all uses.
When the motor is not at work, the expense of running it ceases.
Simple, Safe, Economical, Durable. No extra insurance.
Four sizes: 1 H. P., ½ H. P., 1 man power, and Dental Engine.
These Engines are especially suited for Gasoline Gas for country use.
☞ *Send for Illustrated Catalogue.*
ECONOMIC GAS ENGINE COMPANY,
Office and Salesrooms - - 34 DEY ST. N. Y.

THE AMERICAN BELL TELEPHONE CO.
95 MILK ST. BOSTON, MASS.

This Company owns the Letters Patent granted to Alexander Graham Bell, March 7th, 1876, No. 174,465, and January 30th, 1877, No. 186,787.

The transmission of Speech by all known forms of Electric Speaking Telephones infringes the right secured to this Company by the above patents, and renders each individual user of telephones not furnished by it or its licensees responsible for such unlawful use, and all the consequences thereof, and liable to suit therefor.

GAS ENGINEERING, RECENT PROgress in.—By A. Macpherson. Regenerative system of retort firing. Improvements in gas purification. Burners and regenerative lamps. The Welsbach gas light, Paraffin as a rival of coal gas, oil in gas making. Prices of residual products. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **601.** Price 10 cents. To be had at this office and from all newsdealers.

BARREL MACHINERY.
E. & B. HOLMES,
BUFFALO, N. Y.

COSTS IN MANUFACTURES. A LECture by H. Metcalfe, U. S. A., delivered in the Sibley College course.—An elaboration of a system for the management of factories and employes. A valuable paper. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **605.** Price 10 cents. To be had at this office and from all newsdealers.

PROSPECTUS
OF THE
Scientific American
FOR 1887.
The Most Popular Scientific Paper in the World.
Only $3.00 a Year, including Postage. Weekly. 52 Numbers a Year.

This widely circulated and splendidly illustrated paper is published weekly. Every number contains sixteen pages of useful information and a large number of original engravings of new inventions and discoveries, representing Engineering Works, Steam Machinery New Inventions, Novelties in Mechanics, Manufactures, Chemistry, Electricity Telegraphy, Photography, Architecture, Agriculture, Horticulture, Natural History, etc.

All Classes of Readers find in the SCIENTIFIC AMERICAN a popular *resume* of the best scientific information of the day; and it is the aim of the publishers to present it in an attractive form, avoiding as much as possible abstruse terms. To every intelligent mind, this journal affords a constant supply of instructive reading. It is promotive of knowledge and progress in every community where it circulates.

Terms of Subscription.—One copy of the SCIENTIFIC AMERICAN will be sent for *one year*—52 numbers—postage prepaid, to any subscriber in the United States or Canada, on receipt of **three dollars** by the publishers; six months, $1.50; three months, $1.00.

Clubs.—One extra copy of the SCIENTIFIC AMERICAN will be supplied gratis *for every club of five subscribers* at $3.00 each; additional copies at same proportionate rate.

The safest way to remit is by Postal Order, Draft, or Express Money Order. Money carefully placed inside of envelopes, securely sealed, and correctly addressed, seldom goes astray, but is at the sender's risk. Address all letters and make all orders, drafts, etc., payable to
MUNN & CO.,
361 Broadway, New York.

THE
Scientific American Supplement.
This is a separate and distinct publication from THE SCIENTIFIC AMERICAN, but is uniform therewith in size, every number containing sixteen large pages. THE SCIENTIFIC AMERICAN SUPPLEMENT is published weekly, and includes a very wide range of contents. It presents the most recent papers by eminent writers in all the principal departments of Science and the Useful Arts, embracing Biology, Geology, Mineralogy, Natural History, Geography, Archæology, Astronomy, Chemistry, Electricity, Light, Heat, Mechanical Engineering, Steam and Railway Engineering, Mining, Ship Building, Marine Engineering, Photography, Technology, Manufacturing Industries, Sanitary Engineering, Agriculture, Horticulture, Domestic Economy, Biography, Medicine, etc. A vast amount of fresh and valuable information pertaining to these and allied subjects is given, the whole profusely illustrated with engravings.

The most important Engineering Works, Mechanisms, and Manufactures at home and abroad are represented and described in the SUPPLEMENT.

Price for the SUPPLEMENT for the United States and Canada, $5.00 a year, or one copy of the SCIENTIFIC AMERICAN and one copy of the SUPPLEMENT, both mailed for one year for $7.00. Address and remit by postal order, express money order, or check,
MUNN & Co., 361 Broadway, N. Y.,
Publishers SCIENTIFIC AMERICAN.

To Foreign Subscribers.—Under the facilities of the Postal Union, the SCIENTIFIC AMERICAN is now sent by post direct from New York, with regularity, to subscribers in Great Britain, India, Australia, and all other British colonies; to France, Austria, Belgium, Germany, Russia, and all other European States; Japan, Brazil, Mexico, and all States of Central and South America. Terms, when sent to foreign countries, Canada excepted, $4, gold, for SCIENTIFIC AMERICAN, one year; $9, gold, for both SCIENTIFIC AMERICAN and SUPPLEMENT for one year. This includes postage, which we pay. Remit by postal or express money order, or draft to order of
MUNN & CO., 361 Broadway, New York.

PRINTING INKS.
THE "Scientific American" is printed with CHAS. ENEU JOHNSON & CO.'S INK. Tenth and Lombard Sts., Phila., and 47 Rose St., opp, Duane St., N. Y.

© 1887 SCIENTIFIC AMERICAN, INC.